

# AN8353UB


## High Efficiency Car Dashboard Dimmer IC

### ■ Overview


The AN8353UB is a dimmer IC to control illumination of the car dashboard at high efficiency and high performance by pulse width control. It outputs pulses at a duty proportional to an input voltage.

### ■ Features

- Low power consumption by pulse control
- External ON/OFF control by the standby pin
- Pulse frequency range : 50Hz to 10kHz
- Built-in overvoltage protective circuit approx. 20V
- Wide operating ambient temperature range :  $-40^{\circ}\text{C}$  to  $+100^{\circ}\text{C}$
- All products temperature cycle, high reliability by normal and high temperature checks reliability equivalent to the air bags requested in U.S.

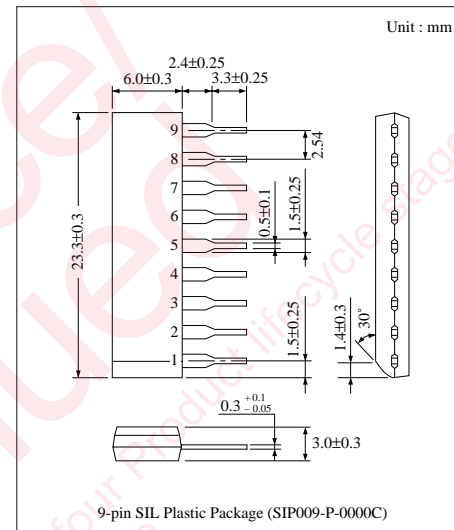

### ■ Block Diagram

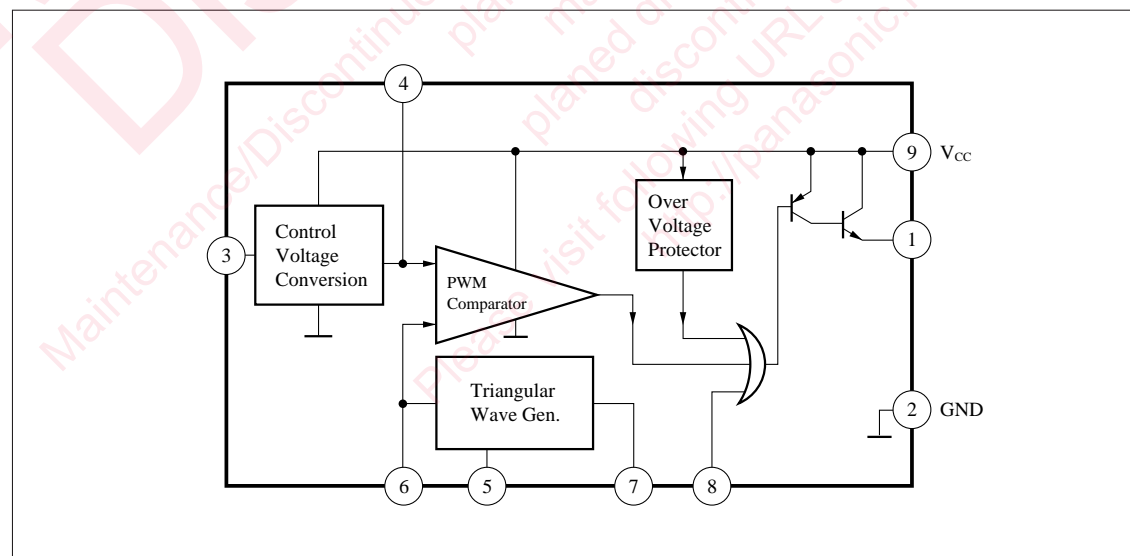

## ■ Pin Descriptions

Pin No.	Pin name	Description
1	Output pin	Outputs an intermittent source current at a duty proportional to an input voltage
2	GND	GND
3	Input pin	Applies a control voltage.
4	Noise eliminating capacity connection pin 1	Connect a capacitor to eliminator a noise.
5	Square wave output pin	Output a triangular wave, which serves as a reference for the PWM signal, to the Pin6 by connecting the resistor $R_T$ between the Pins5 and6, and capacity $C_T$ between the Pin6 and GND.
6	Triangular wave output pin	Output a triangular wave, which serves as a reference for the PWM signal, to this pin by connecting the resistor $R_T$ between the Pins6 and 5, and capacity $C_T$ between the Pin6 and GND.
7	Noise eliminating capacity connection pin 2	Connect a capacitor to eliminator a noise.
8	Standby pin	Forces to shut off an output current if a voltage higher than a threshold voltage of 1.1V is applied to the Pin8.
9	$V_{CC}$	Supply Voltage

## ■ Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit
Supply voltage	$V_{CC}$	22	V
Power dissipation	$P_D$	550	mW
Storage temperature	$T_{opr}$	-40 to +100	°C
Operating ambient temperature	$T_{stg}$	-50 to +150	°C

## ■ Recommended Operating Range (Ta=25°C)


Parameter	Symbol	Range
Operating supply voltage range	$V_{CC}$	8 to 18V

## ■ Electrical Characteristics (Ta=25°C)


Parameter	Symbol	Condition	min	typ	max	Unit
Supply current	$I_{CC}$	Eliminate $C_T$ and $R_T$	4	7.5	11	mA
Oscillation frequency	$f_{osc}$	$C_T=0.027\mu F$	90	115	140	Hz
0% duty input voltage	$V_{IN-0}$	$C_T=0.027\mu F$	2	2.5	3	V
100% duty input voltage	$V_{IN-100}$	$C_T=0.027\mu F$	9.5	10	10.5	V
Center duty ( $V_{CC}=12V$ )	$D_{12V}$	$C_T=0.027\mu F$	35	45	55	%
Center duty ( $V_{CC}=8V$ )	$DD_{8V}$	$C_T=0.027\mu F$	-1	0	1	%
Center duty ( $V_{CC}=18V$ )	$DD_{18V}$	$C_T=0.027\mu F$	-1	0	1	%
Output duty gain	$D_G$	$C_T=0.027\mu F$	45	50	55	%
Output voltage at ON	$V_{ON}$	$C_T=2100pF$	0.6	0.9	1.2	V
Leakage current at OFF	$I_L$	$C_T=2100pF$	—	0	4	$\mu A$
Over voltage detection voltage	$V_{OV}$	$C_T=2100pF$	18	20	22	V
Standby threshold voltage	$V_{STH}$	$C_T=2100pF$	0.55	1.1	1.65	V

## ■ Application Circuit

### • Bipolar Transistor Output

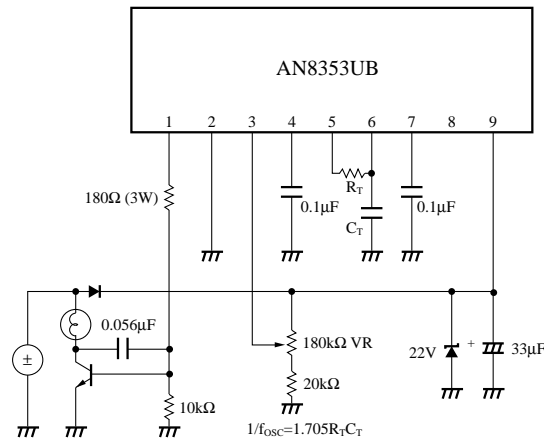

### • MOS FET Output

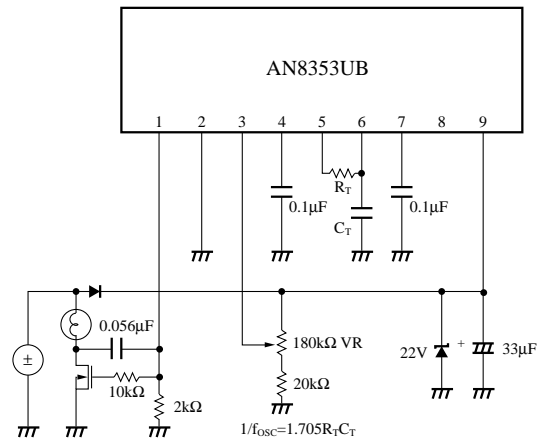

## ■ Supplementary Description

### • System Operational Principle

The following describes the operational principle of the system using the AN8353UB.

As shown in the block diagram in Fig. 1, a battery voltage is divided by the VR and input to the input Pin3 in accordance with rotation amount. The voltage at the output Pin1 is controlled by the AN8353UB so that the duty of the ON/OFF period of the external output transistor will be proportional to the input voltage, thus controlling a current flowing to the lamps of the dashboard, etc. to adjust their brightness. Since the output transistors are saturated at ON time and no current flows at OFF time, power consumption is low.

The PWM method is used to control the output transistors. This method, as shown in Fig. 2 I/O Characteristic Chart (III), generates the triangular wave  $V_6$  as a reference signal

to generate pulses and input them to one end (Pin6) of the PWM comparator. The triangular wave frequency  $f_{osc}$  can be freely set from 50Hz to 10kHz, depending on the resistance value  $R_T$  connected between the square wave output Pin5 and triangular wave output Pin6, and capacity value  $C_T$  connected between the triangular wave output Pin6 and ground Pin2. The approximating expression for the then PWM frequency  $f_{osc}$  is ;

$$1/f_{osc} = 1.705 C_T R_T \dots \dots \dots (1)$$

For your reference, Fig. 3 shows the relations among  $C_T$ ,  $R_T$ , and oscillation frequency  $f_{osc}$ . The voltage  $V_4$ , whose voltage level is made matching the amplitude of the triangular wave by the control voltage converter, is given to the other input (Pin4) of the PWM comparator. That is, in Fig. 2 (II), the input voltage  $V_3$  is linearly converted into  $V_4$  by the control voltage converter so that the amplitude of the triangular wave will be about 20% to 80% of the input voltage input range (axis of abscissas in Fig. 2 (II)).

Then, a current is supplied from the output Pin1 to turn on the output transistors during the period ( $T_{ON}$ ) when the inverted input voltage is larger than the triangular wave. (Fig. 2 (II), (IV)) To the contrary, while the converted input voltage is smaller than the triangular wave, no current is supplied from the output Pin1 and the output transistors are turned off. The output pulse duty is expressed as follows.

$$\text{Duty} = T_{ON} \cdot f_{osc} \dots \dots \dots (2)$$

For the duty control characteristic of the output pulses to the input voltage  $V_3$ , the duty of the output pulses is controlled from 0% to 100% at high-precision linearity while the “input voltage  $V_3$ /supply voltage  $V_9$ ” is between about

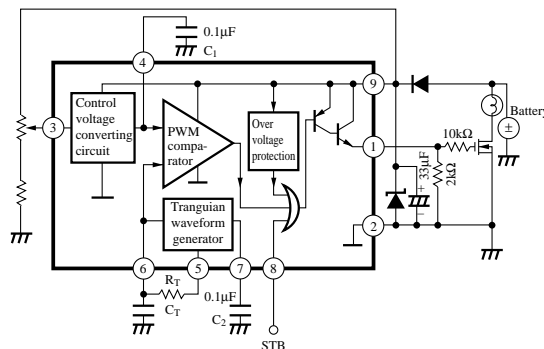


Fig. 1 AN8353UB Block Diagram

## ■ Supplementary Description (cont.)

### • System Operational Principle (cont.)

0.2 (B-point) and 0.8 (C-point). The A-point in the figure shows the I/O characteristics when the “input voltage  $V_3$ /supply voltage  $V_9$ ” is 0.7. And, when  $V_3/V_9$  is from 0.05V to about 0.2V (B-point), the duty is controlled to 0%, and when  $V_3/V_9$  is from 0.8V (C-point) to 1.0V, the duty is controlled to 100%.

The standby Pin8 can forcibly turn off the output transistors by applying a voltage of about 1.1V or more to this pin. When it is not necessary to forcibly turn off the output transistors, Leave the standby Pin8 open.

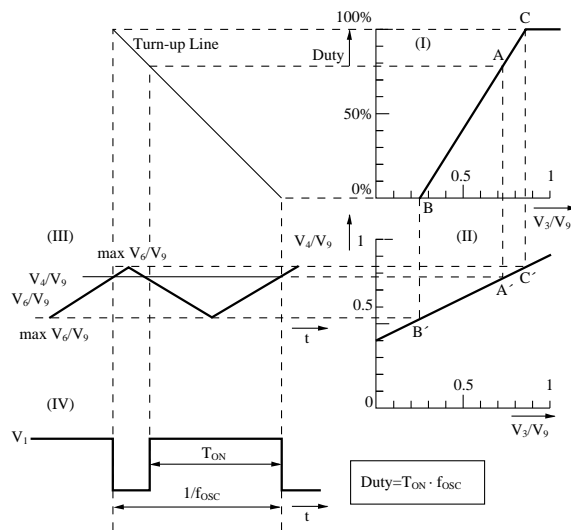


Fig. 2 I/O Characteristic Chart

### • Over voltage Detecting Voltage vs. Output



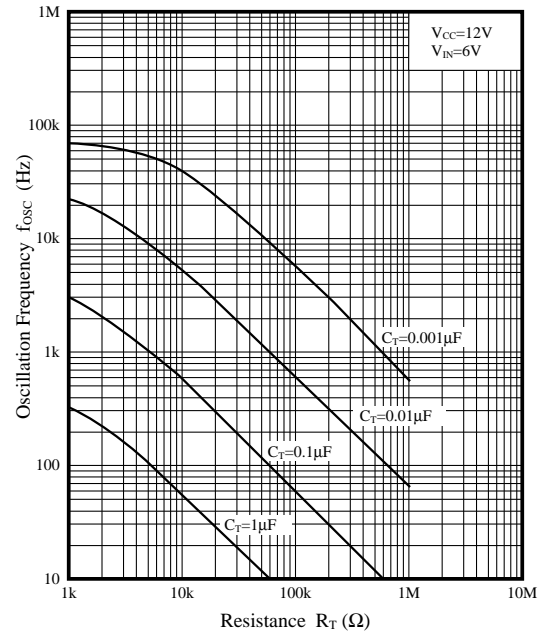


Fig. 3 Relations between Oscillation Frequency and  $C_T$  and  $R_T$


### • Duty $D_1$ vs. Input Voltage $V_{IN}$

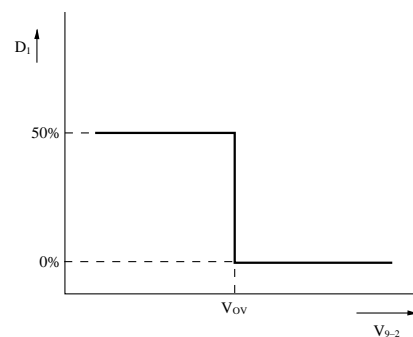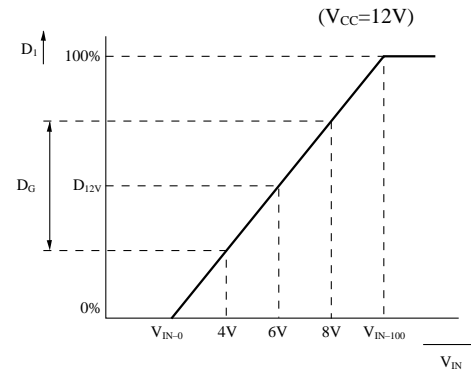

### • Output voltage at ON $V_{ON}$ · Leakage current at OFF

$$V_{ON} = V_{CC} - V_{1-2} \quad I_L = \frac{V_{1-2}}{1M\Omega}$$

### • Standby Threshold Voltage vs. Output

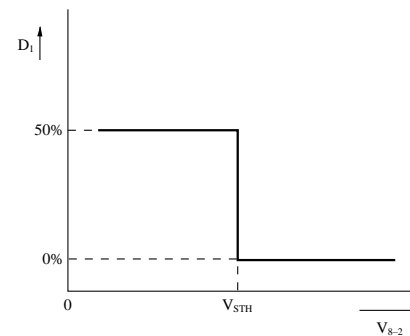

## Request for your special attention and precautions in using the technical information and semiconductors described in this book

- (1) If any of the products or technical information described in this book is to be exported or provided to non-residents, the laws and regulations of the exporting country, especially, those with regard to security export control, must be observed.
- (2) The technical information described in this book is intended only to show the main characteristics and application circuit examples of the products, and no license is granted under any intellectual property right or other right owned by our company or any other company. Therefore, no responsibility is assumed by our company as to the infringement upon any such right owned by any other company which may arise as a result of the use of technical information described in this book.
- (3) The products described in this book are intended to be used for standard applications or general electronic equipment (such as office equipment, communications equipment, measuring instruments and household appliances).  
Consult our sales staff in advance for information on the following applications:
  - Special applications (such as for airplanes, aerospace, automobiles, traffic control equipment, combustion equipment, life support systems and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.
  - Any applications other than the standard applications intended.
- (4) The products and product specifications described in this book are subject to change without notice for modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (5) When designing your equipment, comply with the range of absolute maximum rating and the guaranteed operating conditions (operating power supply voltage and operating environment etc.). Especially, please be careful not to exceed the range of absolute maximum rating on the transient state, such as power-on, power-off and mode-switching. Otherwise, we will not be liable for any defect which may arise later in your equipment.
  - Even when the products are used within the guaranteed values, take into the consideration of incidence of break down and failure mode, possible to occur to semiconductor products. Measures on the systems such as redundant design, arresting the spread of fire or preventing glitch are recommended in order to prevent physical injury, fire, social damages, for example, by using the products.
- (6) Comply with the instructions for use in order to prevent breakdown and characteristics change due to external factors (ESD, EOS, thermal stress and mechanical stress) at the time of handling, mounting or at customer's process. When using products for which damp-proof packing is required, satisfy the conditions, such as shelf life and the elapsed time since first opening the packages.
- (7) This book may be not reprinted or reproduced whether wholly or partially, without the prior written permission of Matsushita Electric Industrial Co., Ltd.