

# MORNSUN

## H\_RN-2W Series

**2W, FIXED INPUT, ISOLATED & UNREGULATED  
SINGLE OUTPUT DC-DC CONVERTER**



multi-country patent protection **RoHS**

### FEATURES

High Efficiency up to 80%  
DIP Package  
6KVDC Isolation  
Temperature Range: -40°C to +85°C  
Internal SMD Construction  
No Heat sink Required  
No External Component Required  
Continuous short circuit protection  
Industry Standard Pinout  
RoHS Compliance

### APPLICATIONS


The H\_RN-2W Series are specially designed for applications where a group of polar power supplies are isolated from the input power supply in a distributed power supply system on a circuit board. These products apply to:

- 1) Where the voltage of the input power supply is fixed (voltage variation  $\leq \pm 10\%$ );
- 2) Where isolation is necessary between input and output (isolation voltage  $\leq 6000\text{VDC}$ );
- 3) Where the regulation of the output voltage and the output ripple noise are not demanding.

Such as: purely digital circuits, ordinary low frequency analog circuits, and IGBT power device driving circuits.

### MODEL SELECTION

H0505RN-2W

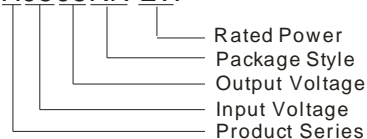

### MORNSUN Science & Technology co., Ltd.

Address: 2th floor 6th building, Hangzhou Industrial District, Guangzhou, China  
Tel: 86-20-38601850  
Fax: 86-20-38601272  
<http://www.mornsun-power.com>

### PRODUCT PROGRAM

Part Number	Input		Output			Efficiency (% Typ)
	Voltage (VDC)		Voltage (VDC)	Current (mA)		
	Nominal	Range		Max	Min	
H0505RN-2W	5	4.5-5.5	5	400	40	76
H0512RN-2W*			12	167	17	79
H0515RN-2W			15	133	13	78
H1205RN-2W*	12	10.8-13.2	5	400	40	76
H1212RN-2W*			12	167	17	80
H1215RN-2W			15	133	13	79
H2405RN-2W*	24	21.6-26.4	5	400	40	77
H2412RN-2W*			12	167	17	80
H2415RN-2W*			15	133	13	78

\*Designing.

### OUTPUT SPECIFICATIONS

Item	Test Conditions	Min	Typ	Max	Units
Output power		0.2		2	W
Line regulation	For $V_{in}$ change of 1%			$\pm 1.2$	
Load regulation	10% to 100% load (5V output)		12.8	15	%
	10% to 100% load (12V output)		6.8	15	
	10% to 100% load (15V output)		6.3	15	
Output voltage accuracy		See tolerance envelope graph			
Temperature drift	100% full load			0.03	%/°C
Ripple & Noise*	20MHz Bandwidth		150	200	mVp-p
Switching frequency	Full load, nominal input		50		KHz

\*Test ripple and noise by "parallel cable" method. See detailed operation instructions at Testing of Power Converter. Section, application notes.



### COMMON SPECIFICATION

Item	Test Conditions	Min	Typ	Max	Units
Storage humidity				95	%
Operating temperature		-40		85	°C
Storage temperature		-55		125	
Temp. rise at full load			15	25	
Lead temperature	1.5mm from case for 10 seconds			300	
Cooling		Free air convection			
Case material		Plastic(UL94-V0)			
Short circuit protection		Continuous, automatic recovery			
MTBF		3500			K hours
Weight			3.8		g



## ISOLATION CHARACTERISTICS

Item	Test Conditions	Min	Typ	Max	Units
Isolation voltage	Tested for 1 minute and 1mA max	6000			VDC
Isolation resistance	Test at 500VDC	1000			MΩ
Isolation capacitance			10		pF

## TYPICAL CHARACTERISTICS

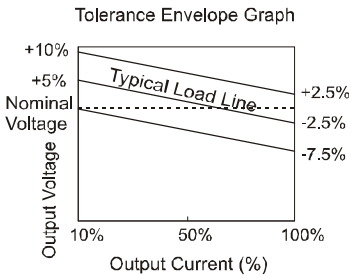


## OUTLINE DIMENSIONS & PIN CONNECTIONS

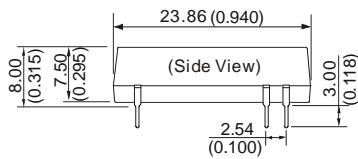

Note:  
 Unit:mm(inch)  
 Pin section:0.60\*0.25mm(0.024\*0.010inch)  
 Pin tolerances:±0.10mm(±0.004inch)  
 General tolerances:±0.25mm(±0.010inch)

First Angle Projection

RECOMMENDED FOOTPRINT  
 Top view,grid:2.54mm(0.1inch)  
 diameter:1.00mm(0.039inch)




### FOOTPRINT DETAILS

Pin	Function
1	GND
7	NC
8	NC
9	+Vo
10	-Vo
16	Vin

NC:No Connection

## Recommended testing and application circuit

If you want to further decrease the input/output ripple, an "LC" filtering network may be connected to the input and output ends of the DC/DC converter, see (Figure 1).

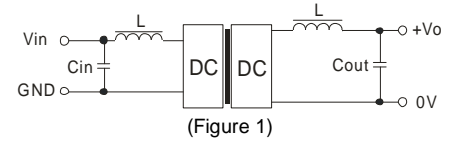

It should also be noted that the inductance and the frequency of the "LC" filtering network should be staggered with the DC/DC frequency to avoid mutual interference. However, the capacitance of the output filter capacitor must be proper. If the capacitance is too big, a startup problem might arise. For every channel of output, provided the safe and reliable operation is ensured, the recommended capacitance of its filter capacitor sees (Table 1).


### EXTERNAL CAPACITOR TABLE (Table 1)

Vin (VDC)	Cin (uF)	Single Vout (VDC)	Cout (uF)
5	4.7	5	10
12	2.2	12	2.2
24	1	15	1

It's not recommend to connect any external capacitor in the application field with less than 0.5 watt output.

## Output Voltage Regulation and Over-voltage Protection Circuit

The simplest device for output voltage regulation, over-voltage and over-current protection is a linear voltage regulator with overheat protection that is connected to the input or output end in series (Figure 2).

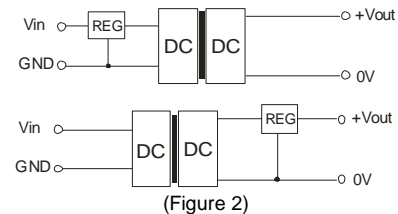

## Overload Protection

Under normal operating conditions, the output circuit of these products has no protection against overload. The simplest method is to connect a self-recovery fuse in series at the input end or add a circuit breaker to the circuit.

## No parallel connection or plug and play.

Note:

- All specifications measured at Ta=25°C, humidity<75%, nominal input voltage and rated output load unless otherwise specified.
- Only typical models listed, other models may be different, please contact our technical person for more details.
- Operation under minimum load will not damage the converter; However, they may not meet all specification listed.

## APPLICATION NOTE

### Requirement On Output Load

To ensure this module can operate efficiently and reliably, a minimum load is specified for this kind of DC/DC converter in addition to a maximum load (namely full load). During operation, make sure the specified range of input voltage is not exceeded, the minimum output load is **not less than 10%** of the full load, and that this product should **never be operated under no load!** If the actual output power is very small, please connect a resistor with proper resistance at the output end in parallel to increase the load, or use our company's products with a lower rated output power.