

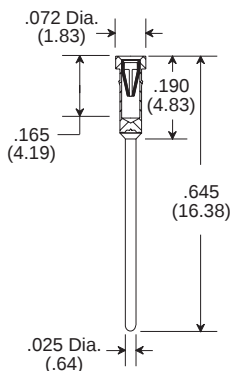


Contact Acceptance Range .016" (.41mm) - .022" (.56mm) Dia. or .010" (.25mm) x .018" (.46mm) Rectangular Lead



Type	Part Number	Contact Group
-333	3715	C




Type	Part Number	Contact Group
-488	4422	C




Type	Part Number	Contact Group
-90	1374	C




Type	Part Number	Contact Group
-577	4689-2	C

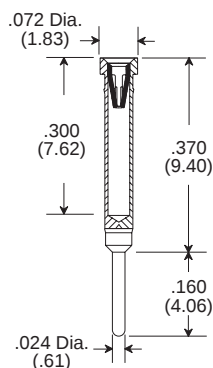


Type	Part Number	Contact Group
-346	4036	C




Type	Part Number	Contact Group
-141	1928	C

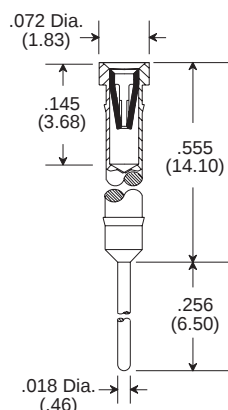


Type	Part Number	Contact Group
-373	4134	C

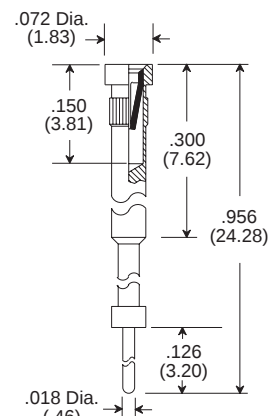


Type	Part Number	Contact Group
-382	4163	C

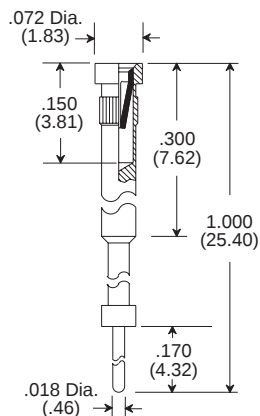


Type	Part Number	Contact Group
-72	1066	C

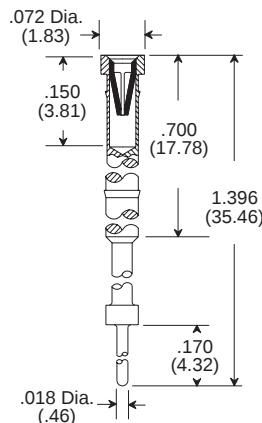

Type	Part Number	Contact Group
-372	4133	C



Type	Part Number	Contact Group
-05	1028	C

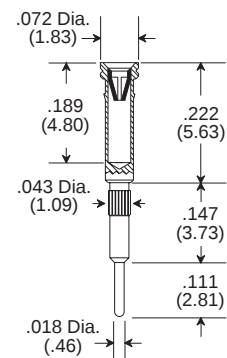

Type	Part Number	Contact Group
-240	3151	C

Material:
Terminal: Brass - Copper Alloy (C36000), ASTM-B-16
Contact: Beryllium Copper - Copper Alloy (C17200), ASTM-B-194

Plating:
Contact: G = Gold/Nickel
T = Tin-Lead/Nickel

Gold: per MIL-G-45204
Tin-Lead: per MIL-P-81728
Nickel: per QQ-N-290

Note: Pins with "V" groove in head may be supplied in Peel-A-Way®

Terminals not drawn to scale.