| REV. | DESCRIPTION | DATE |
|---|---|---|
| A | NEW DRAWING | 11/03/2010 |

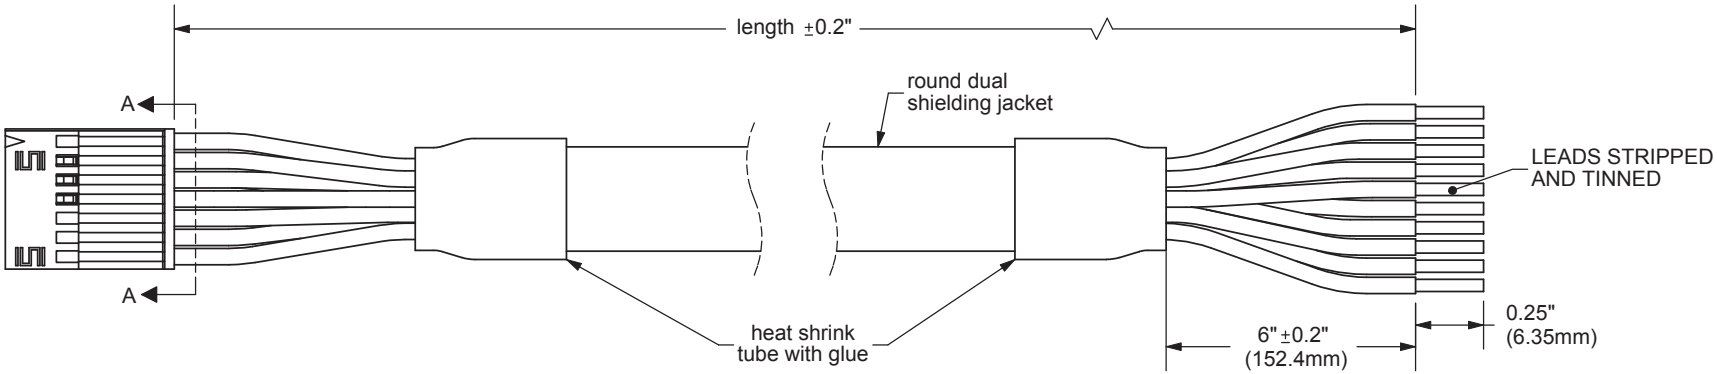


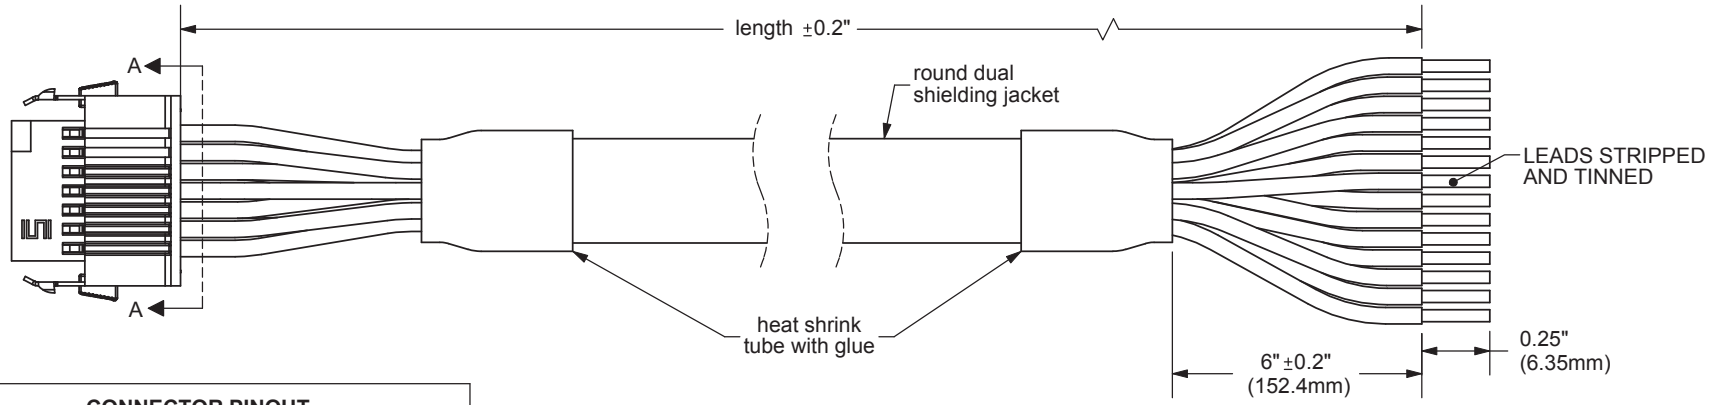


**CONNECTOR PINOUT**

| # | COLOR | AMT203 | AMT303 | AMT303LD |
|---|---|---|---|---|
| 14 | ORN/WHI | T_Bit | GND_C | GND_C |
| 13 | BLU/WHI | N/A | N/A | -X |
| 12 | WHI/BLU | X | X | X |
| 11 | GRN/WHI | N/A | N/A | -A |
| 10 | WHI/GRN | A | A | A |
| 9 | YLW/WHI | N/A | N/A | -B |
| 8 | WHI/YLW | B | B | B |
| 7 | WHI/ORN | MOSI | V | V |
| 6 | PNK/WHI | 5 V+ | 5 V+ | 5 V+ |
| 5 | BRN/WHI | SCK | W | W |
| 4 | WHI/PNK | GND | GND | GND |
| 3 | TAN/WHI | MISO | U | U |
| 2 | WHI/BRN | CSB | zero set | zero set |
| 1 | WHI/TAN | N/A | N/A | N/A |

AMT203303- XXC X X XXX

Terminated conductor count:
10C = 10 (AMT203/303)
14C = 14 (AMT303LD)

Temperature rating:
S = standard (80˚C)
H = high (105˚C)

Connector:
"blank" = standard
L = locking

Length:
(in inches)

TOLERANCE:
±0.3mm UNLESS OTHERWISE SPECIFIED

RoHS

CUI INC
20050 SW 112th Ave.
Tualatin, OR 97062
Phone: 503-612-2300
800-275-4899
Fax: 503-612-2383
Website: www.cui.com

| | | |
|---|---|---|
| TITLE: AMT203/303 Interface Cable | | REV: A |
| PART NO. AMT203303-XXCXXXXX | UNITS: MM [INCHES] | |
| DRAWN BY: JRH | APPROVED BY: | SCALE: 2:1 |

COPYRIGHT 2010 BY CUI INC.