


## Description

The A78Rxx Series is a low dropout voltage regulator suitable for various electronic equipments. It provides constant voltage power source with TO-220F-4SL lead full-mold package. Dropout voltage of A78Rxx Series is below Max .0.5V in full rated current (1A). This regulator has various functions such as current limit protection, over voltage protection and output on/off control.

## Features

- 1A output low dropout regulator
- TO-220F-4SL full-mold package (4pin)
- Current limit protection
- Over voltage protection
- Thermal Shutdown Protection
- With output on/off control (At typical 1.5V)
- Control pin open or high signal, output on

## Pin Connection

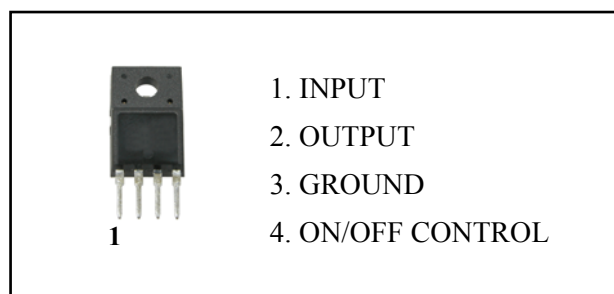


## Ordering Information

Type NO.	Marking	Package Code
A78RxxPIC	A78RxxPI	TO-220F-4SL
xx: Voltage (3.3V=33, 5.0V=05, 8.0V=08, 9.0V=09)		

## Device Selection Guide

Device	Output Voltage
A78R33PIC	3.3V
A78R05PIC	5.0V
A78R08PIC	8.0V
A78R09PIC	9.0V

## Block Diagram

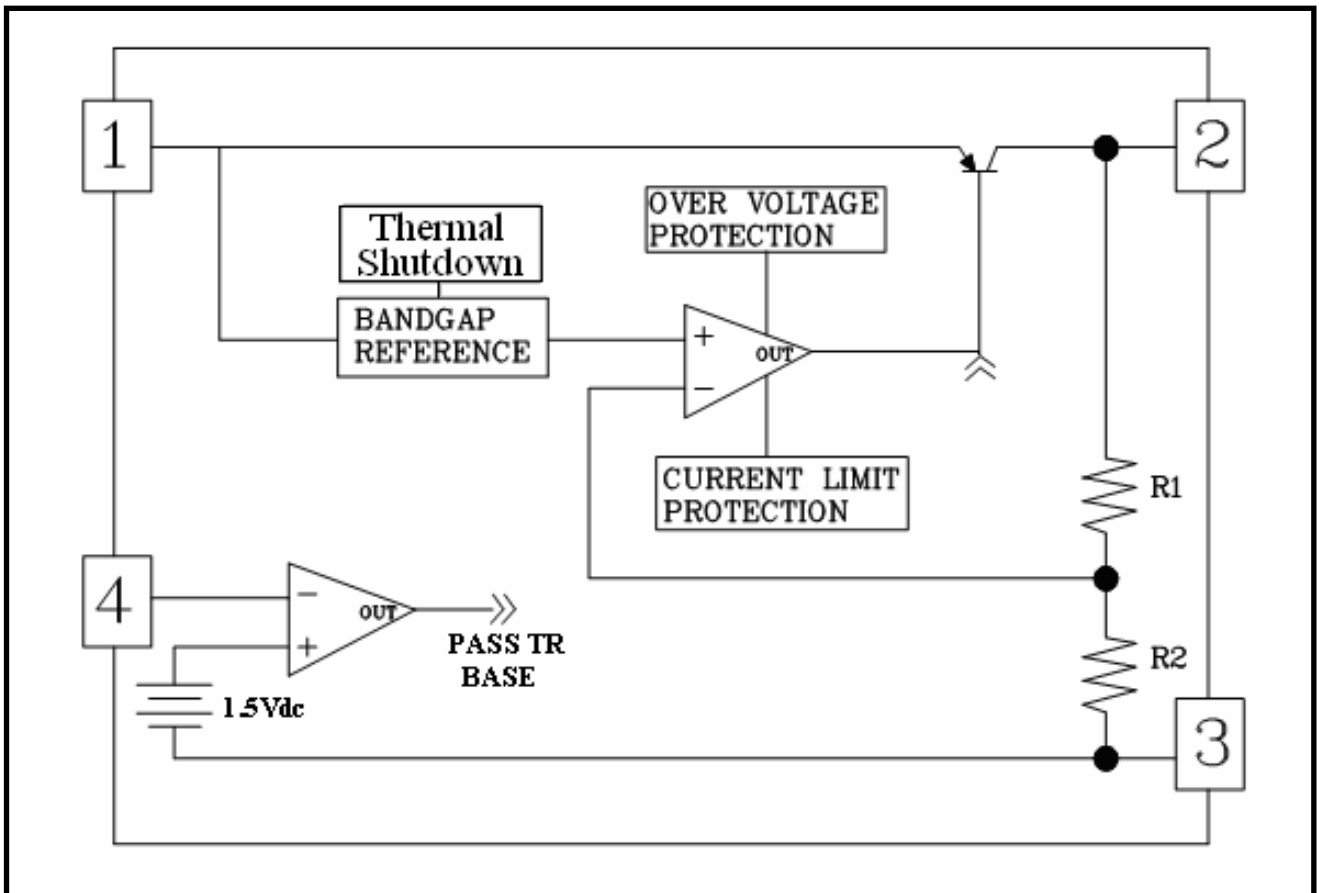

## Absolute Maximum Ratings

[Ta=25°C]

Characteristic	Symbol	Rating	Unit
Input Voltage	$V_I$	18	V
Control Input Voltage	$V_{CT}$	18	V
Power Dissipation	$P_{D1}$ (No Heatsink)	2.0	W
	$P_{D2}$ (With Heatsink)	20	W
Junction Temperature	$T_J$	150	°C
Operating Temperature Range	$T_{opr}$	-20 ~ 80	°C
Storage Temperature Range	$T_{stg}$	-55 ~ 150	°C

## Electrical Characteristics

( $V_I = V_O + 2V$ ,  $I_O = 500mA$ ,  $V_{CT(High)} = 2.7V$ ,  $T_a = 25^\circ C$ , unless otherwise specified)

Electric Characteristic	Symbol	Conditions	Min.	Typ.	Max.	Unit	
Output Voltage	$V_O$	A78R33PIC	-	3.22	3.3	3.38	V
		A78R05PIC	-	4.88	5.0	5.12	V
		A78R08PIC	-	7.80	8.0	8.20	V
		A78R09PIC	-	8.78	9.0	9.22	V
Line Regulation	$\Delta V_{O(\Delta V_I)}$	Note1, $I_O = 500mA$	-	0.5	2.5	%	
Load Regulation	$\Delta V_{O(\Delta I_L)}$	$5mA \leq I_O \leq 1.0A$	-	0.1	2.0	%	
Quiescent Current	$I_{QC}$	$I_O = 0mA$	-	-	10	mA	
Ripple Rejection Ratio	RR	$(V_O + 2V) \leq V_I \leq 12V$ , $I_O = 50mA$ $f = 120Hz$	45	55	-	dB	
Dropout Voltage	$V_{DROP}$	$I_O = 1.0A$	-	-	0.5	V	
Control Voltage High	$V_{CT(High)}$	$I_O = 0mA$ , Output ON	2.0	-	-	V	
Control Voltage Low	$V_{CT(Low)}$	$I_O = 0mA$ , Output OFF	-	-	0.8	V	
Control Bias Current High	$I_{CT(High)}$	$V_{CT(High)} = 2.7V$	-	-	20	$\mu A$	
Control Bias Current Low	$I_{CT(Low)}$	$V_{CT(Low)} = 0.4V$	-	-	-0.4	mA	

Note


1. A78R33:  $V_I = 4.3V \sim 12V$

A78R05:  $V_I = 6V \sim 12V$

A78R08:  $V_I = 9V \sim 16V$

A78R09:  $V_I = 10V \sim 16V$

## ■ Test Circuit of A78RxxPIC

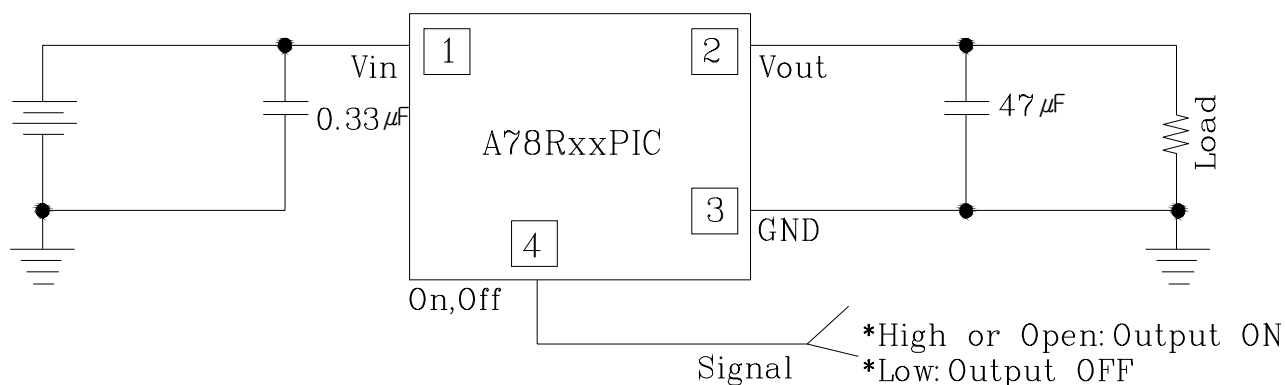

## Electrical Characteristic Curves

Fig.1  $I_O$  vs.  $V_O$

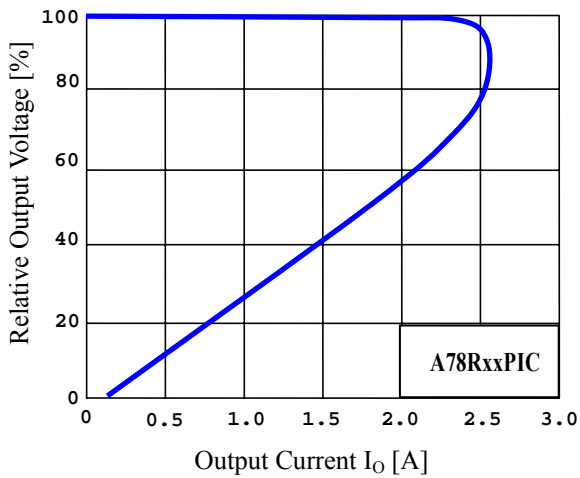


Fig.2  $T_a$  vs.  $P_D$

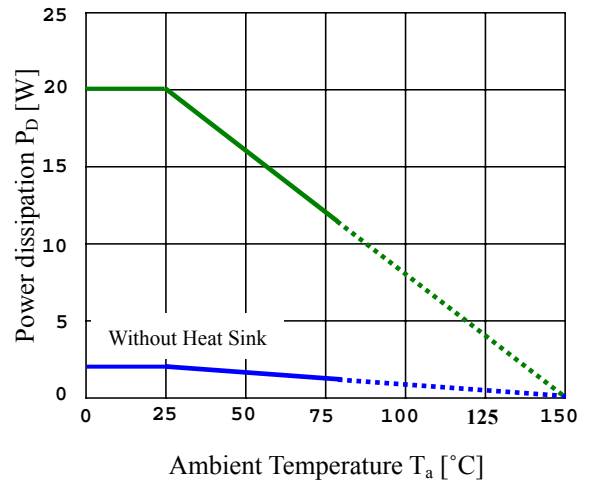


Fig.3  $V_I$  vs.  $I_{QC}$

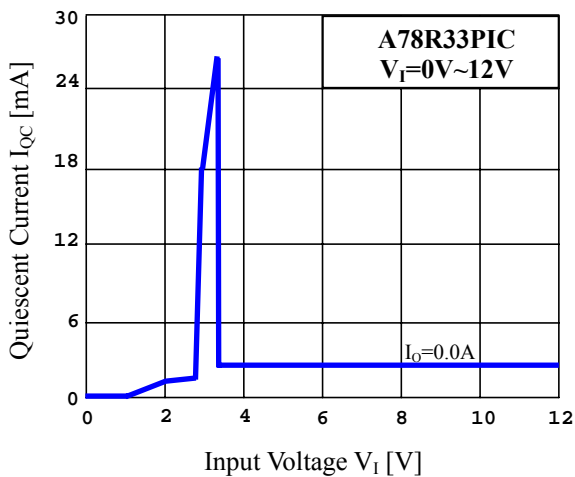


Fig.4  $V_I$  vs.  $I_{QC}$

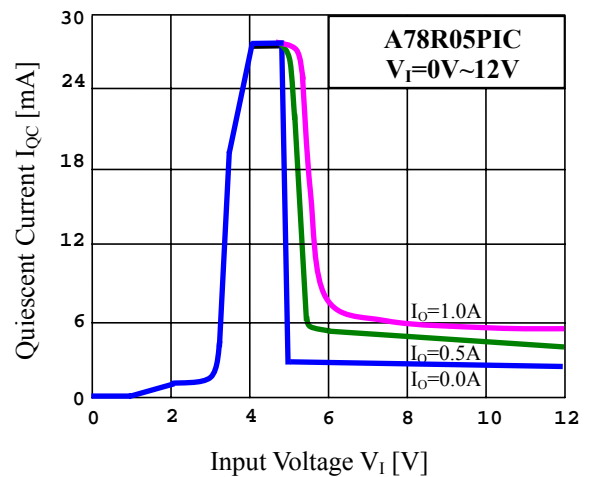


Fig.5  $V_I$  vs.  $I_{QC}$


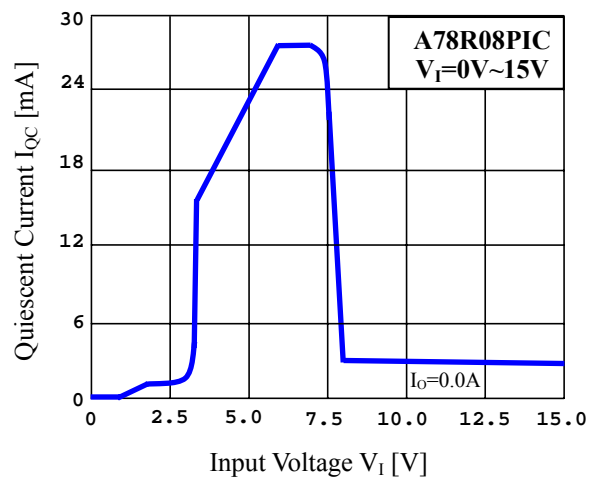


Fig.6  $V_I$  vs.  $I_{QC}$

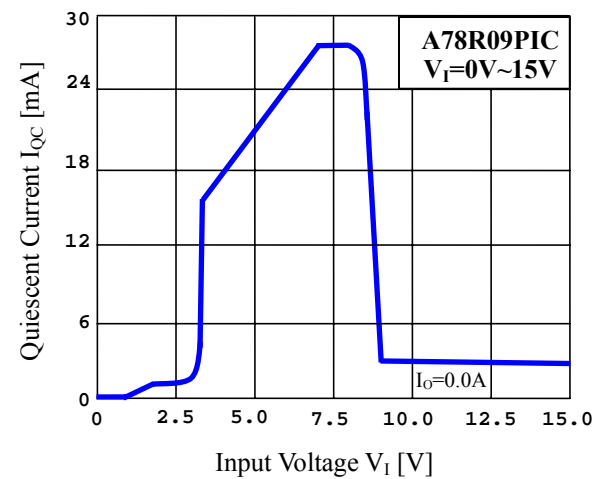

## Electrical Characteristic Curves

Fig.7  $T_j$  vs.  $V_o$

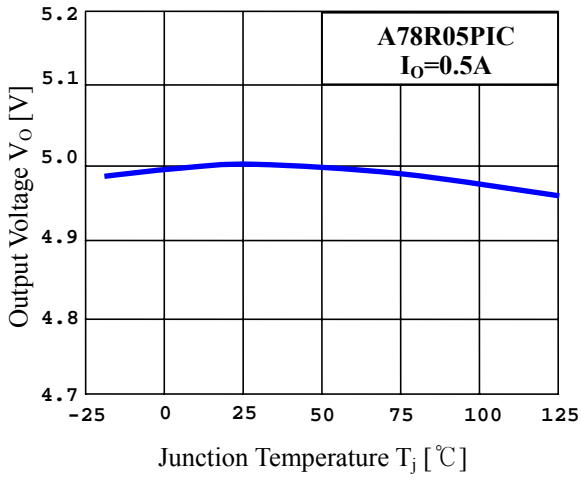


Fig.8  $T_j$  vs.  $I_{QC}$



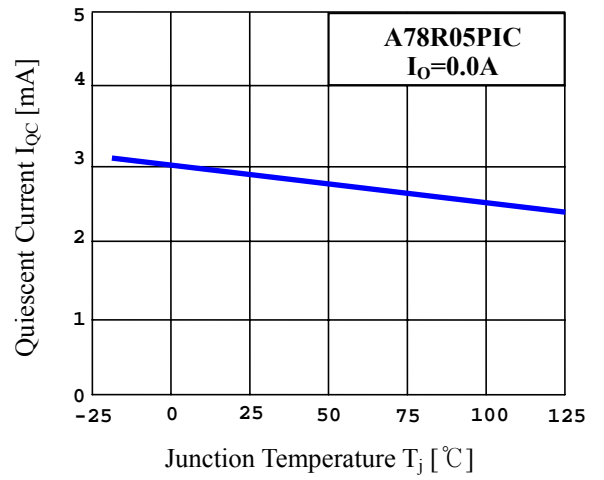


Fig.9  $V_{CT}$  vs.  $V_o$

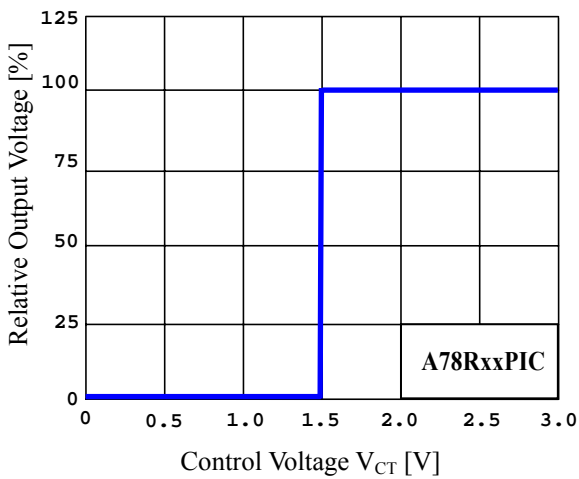

Outline Dimensions (Unit: mm)

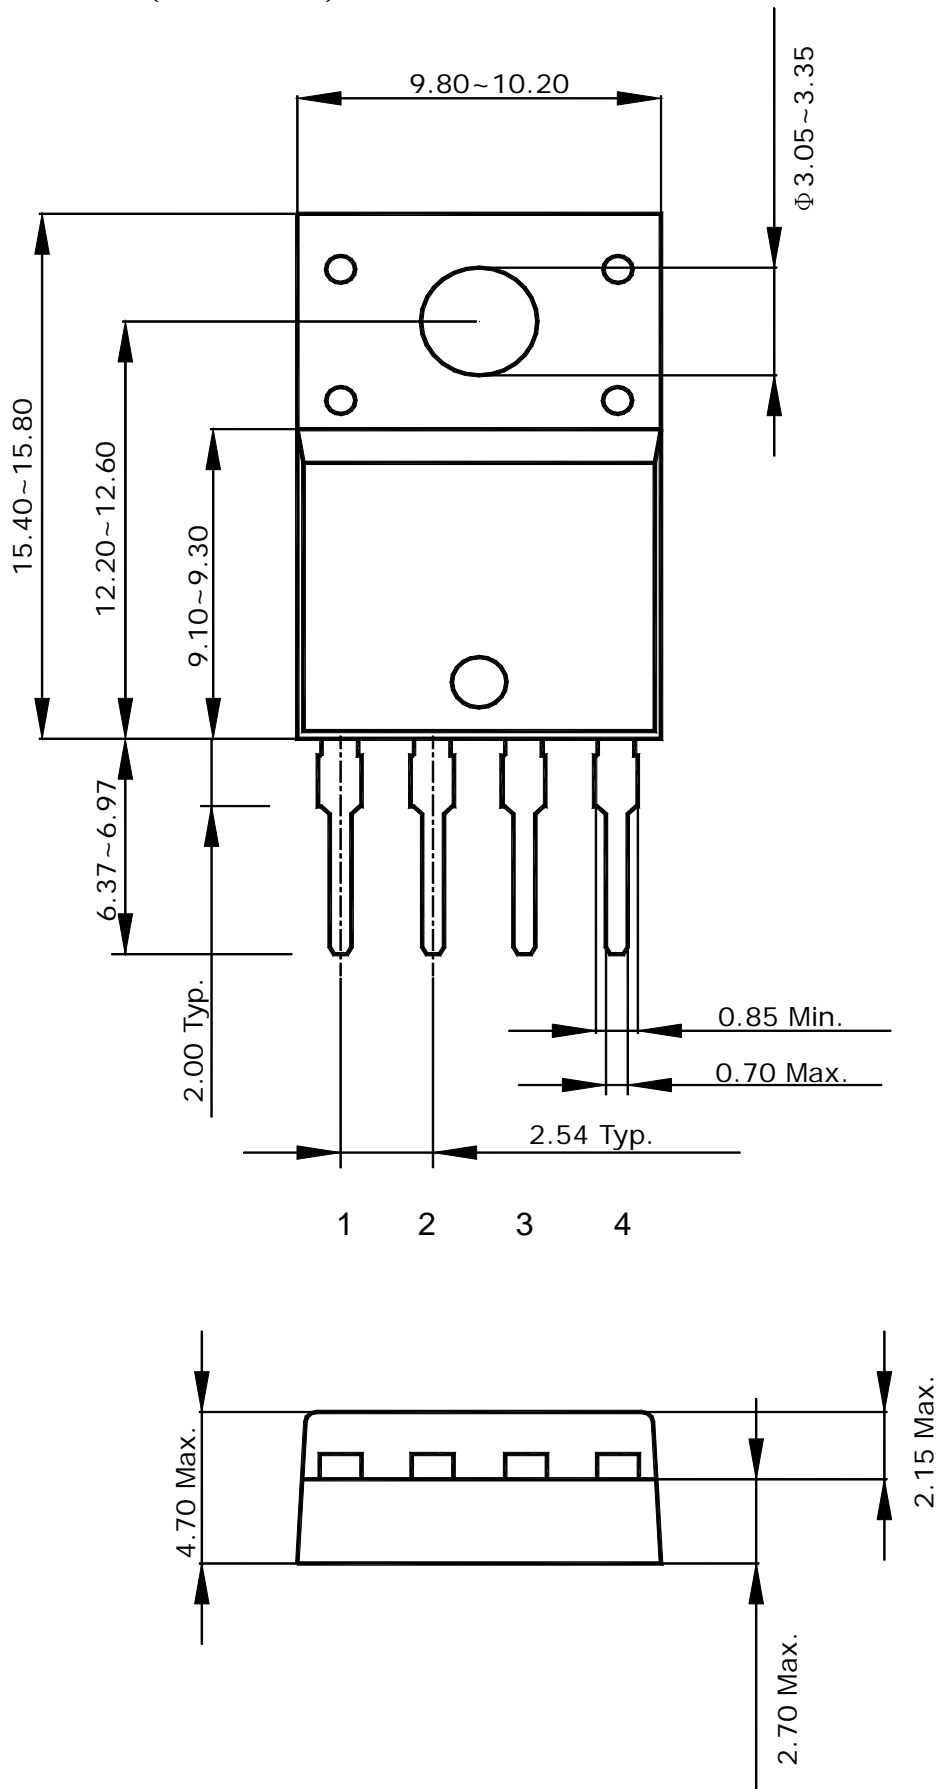

**The AUK Corp. products are intended for the use as components in general electronic equipment (Office and communication equipment, measuring equipment, home appliance, etc.).**

**Please make sure that you consult with us before you use these AUK Corp. products in equipments which require high quality and / or reliability, and in equipments which could have major impact to the welfare of human life(atomic energy control, airplane, spaceship, transportation, combustion control, all types of safety device, etc.). AUK Corp. cannot accept liability to any damage which may occur in case these AUK Corp. products were used in the mentioned equipments without prior consultation with AUK Corp..**

**Specifications mentioned in this publication are subject to change without notice.**