

# ConnectPort X2e<sup>®</sup> for Smart Energy

ZigBee Smart Energy Certified IP Gateway

Gateway with the ZigBee Smart Energy Public Application Profile 1.1 provides low-cost, interoperable IP-to-application connectivity for customer engagement.




## Overview

The ConnectPort X2e for Smart Energy provides a low-cost connection between a Home Area Network (HAN) and remote web applications, Digi's Smartlee<sup>®</sup> application for iPhone and Android, or utility-hosted websites designed for customer engagement.

The gateway provides near real-time energy data access and control capabilities based on the Smart Energy devices enabled in the customer's home, such as Programmable Communicating Thermostats (PCTs), In-Home Displays (IHDs) and Smart Energy utility meters.

The ConnectPort X2e for Smart Energy is available in two configuration options. The Coordinator version is intended for stand-alone Smart Energy networks that do not have smart meters present. The Router version is configured to connect and read the smart metering system which has been installed at the site.

## Application Highlight

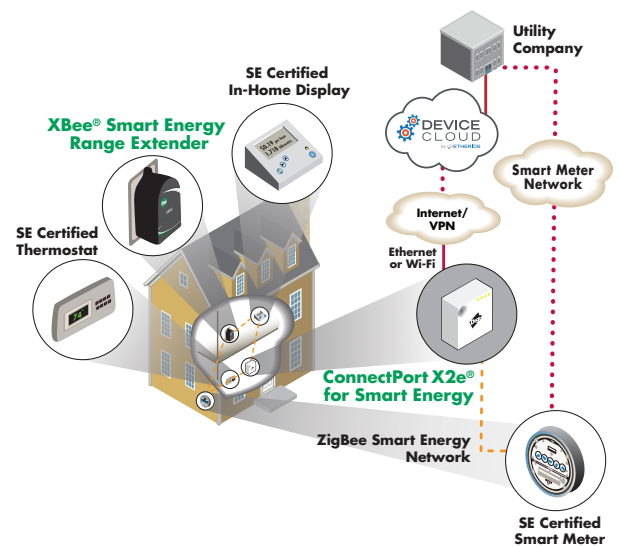


## Features/Benefits

- Full certification to ZigBee Alliance Smart Energy Public Application Profile 1.1 and backwards compatible to 1.0
- Ethernet, Wi-Fi and cellular options for flexible broadband connectivity
- Uses Device Cloud by Etherios™ to manage connectivity, configuration and software upgrades as well as application integration via published APIs
- Supports both stand-alone Smart Energy networks and Smart Energy metering systems
- Enables the Home Area Network (HAN) and Smart Energy devices, such as Programmable Communicating Thermostat (PCT) and In-Home Display products from other manufacturers

## Related Products



Device Cloud Solutions



SE Ready Modules



SE Range Extenders



Smart Energy Bundles



Cellular Gateways



Smartlee<sup>®</sup> Application



# Specifications

# ConnectPort X2e® for Smart Energy

# ConnectPort X2e® Cellular for Smart Energy

General		
Management	Secure enterprise management via Device Cloud	
Protocols	UDP/TCP, DHCP	
LEDs	Power, Network (LAN/WAN), ZigBee (HAN/PAN)	Power, Network (LAN/WAN), ZigBee (HAN/PAN), Cellular signal strength
Security	SSL tunnels	SSL tunnels, Cellular network security
ZigBee	XBee® ZB SMT transmit power 6.3 mW (+8 dBm); Receiver sensitivity (1% PER) -102 dBm	
Dimensions (L x W x H)	3 in x 3 in x 1 in (7.62 cm x 7.62 cm x 2.54 cm)	3 in x 4 in x 1 in (7.62 cm x 10.16 cm x 2.54 cm)
Weight	0.15 lb (0.07 kg)	0.37 lb (0.082 kg)
Development		
ZigBee Public Application Profile	Smart Energy 1.1 (Backwards compatible to 1.0)	
Python Version	2.7.1	
Processor and Memory (Varies by firmware and OS version)	Freescale i.MX28, 20 MB RAM, 10 MB file space	
Ethernet		
Ports	1 RJ-45 port	
Physical Layer	10/100Base-T	
Data Rate	10/100 Mbps (auto-sensing)	N/A
Mode	Full or half duplex (auto-sensing)	N/A
Routing	Ethernet port designed for WAN backhaul only	Ethernet port designed for configuration only
Wi-Fi		
802.11	b/g/n	N/A
Data Rate	Up to 72.2 Mbps	N/A
Transmit Power	18 dBm typical (varies by mode and channel)	N/A
Receiver Sensitivity	Up to -87 dBm @ 11 Mbps	N/A
Modes	AP Client Modes only; Access Point Mode not supported	N/A
Power Requirements		
Power Supply	5 VDC power supply with barrel connector included	
Power Consumption	Typical: 1.2 W, Max: 2.5 W	Typical: 3.5 W, Max: 15 W
Environmental		
Operating Temperature	0° C to 40° C (32° F to 104° F)	
Relative Humidity	5% to 95% (non-condensing)	
Ethernet Isolation	500 VAC min per IEEE802.3/ANSI X3.263	
Regulatory Approvals		
Mobile Certifications (GSM)	N/A	AT&T
Mobile Certifications (CDMA)	N/A	Verizon / (Sprint Pending)
Safety	EN60950	
Emissions/Immunity	CE, FCC Part 15 (Class B), IC, ETSI	

Visit [www.digi.com](http://www.digi.com) for part numbers.

**DIGI SERVICE AND SUPPORT** - You can purchase with confidence knowing that Digi is here to support you with expert technical support and a strong five-year warranty. [www.digi.com/support](http://www.digi.com/support)

91001721  
A7/913

**Digi International  
Worldwide HQ**

877-912-3444  
952-912-3444

**Digi International  
France**

+33-1-55-61-98-98  
[www.digi.fr](http://www.digi.fr)

**Digi International  
Japan**

+81-3-5428-0261  
[www.digi-intl.co.jp](http://www.digi-intl.co.jp)

**Digi International  
India**

+91-80-4287-9887

**Digi International  
Singapore**

+65-6213-5380

**Digi International  
China**

+86-21-5150-6898  
[www.digi.cn](http://www.digi.cn)

BUY ONLINE • [www.digi.com](http://www.digi.com)

© 2011-2013 Digi International Inc.  
All rights reserved. Digi, Digi International, Etherios, the Digi logo, the Device Cloud by Etherios logo, ConnectPort, ConnectPort X2e, Device Cloud by Etherios, Smartlee and XBee are trademarks or registered trademarks of Digi International Inc. in the United States and other countries worldwide. All other trademarks are the property of their respective owners. All information provided is subject to change without notice.

[info@digi.com](mailto:info@digi.com)

