## 12V 60W / MDS-065APS12 BA



# **065 APS**

### **Highlights & Features**

- Compliant to IEC 60601-1 3rd edition
- IT and medical safety approvals
- Low earth leakage current (<0.1mA)</li>
- Overload, over voltage, over temperature and short circuit protections
- Risk management report available

#### **Safety Standards**



CB Certified for worldwide use

Model Number: MDS-065APS12 BA

Unit Weight: 0.13kg

**Dimensions (W x L x H):** 50.8x101.6x30.0 mm

2.0x4.0x1.2 in

### **General Description**

The MDS series of embedded power supply comes with universal AC input at 90Vac to 264Vac. Other features include low earth leakage, risk management report available and the electric shock protection comply with 2 x MOPP. The MDS series is certified for EMC standards according to EN 55011 for industrial, scientific and medical (ISM) radio-frequency equipment and EN 55022 for Information Technology Equipment (ITE) radio-frequency equipment. In addition, only recognized Japanese capacitors are used.

The MDS series come with both medical and ITE safety approvals including UL/CSA/CQC /CE and CB certification and are fully compliant with RoHS Directive 2011/65/EU for environmental protection.

#### **Model Information**

Medical AC-DC Open Frame

Model Number	Input Voltage Range	Output Voltage	Output Current
MDS-065APS12 BA	90-264Vac	12Vdc	5A

#### **Model Numbering**

MDS	065	Α	Р	S	12	В	Α
Delta Medical power Supply	Max wattage in the product Series. Maybe lower at some voltage. 060 → 60W 120 →120W 1K2 → 1,200W	Family Code A~ Z	Product Type P: Open Frame	Output Code S: Single Output 2: Dual Output 3: Triple Output 4: Four Output 5: More than Five Output	Output Voltage Single Output: - 03 for 3.3V - 05 for 5V - 12 for 12V Multiple Output: Serial Number 00 to 99	Input Connector code A: Class II, STD Connector B: Class I, STD Connector	Output Connector code A: STD Connector



# 12V 60W / MDS-065APS12 BA

### **Specifications**

### Input Ratings / Characteristics

100-240Vac
90-264Vac
50-60Hz
47-63Hz
1.5A @ 100Vac, 0.75A @ 240Vac
87.5%, Reference Fig.1
0.3W
30A @ 115Vac, 60 A @ 230Vac
0.1mA @ 264Vac NC1, 0.3mA @ 264Vac SFC2)

<sup>1)</sup> NC: normal condition

<sup>2)</sup> SFC: single fault condition

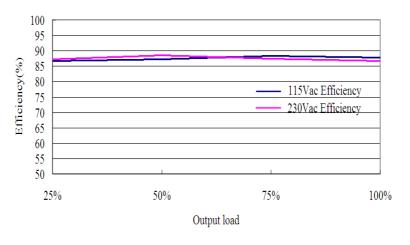


Fig.1 Efficiency versus output load


### Output Ratings / Characteristics


Nominal Output Voltage	12Vdc
Output Current	5A
Output Power	60W
Output Peak Load	6.92A*
Line Regulation (max)	±0.5%
Load Regulation (max)	±1%
Ripple & Noise (typ.)	29.2mV pk-pk @ Full load, Reference Fig. 2,
Start-up Time(max)	3000ms @ 115Vac
Hold-up Time(min)	15ms @ 115Vac
Dynamic Response (Overshoot & Undershoot O/P Voltage)	± 3% @ 50-100% load

<sup>\*</sup>Output peak can last 8 sec with 10% duty cycle, and the output voltage should meet ±5% voltage regulation at normal input voltage



# 12V 60W / MDS-065APS12 BA

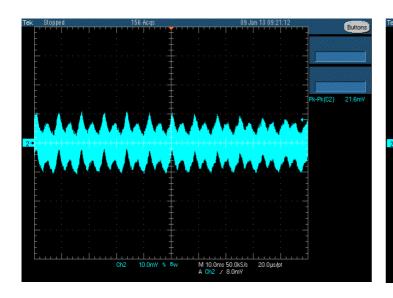




(b) 230V

(a) 115V

Fig. 2 Ripple & Noise example, 20MHz BW

### Ripple & Noise measurement circuit

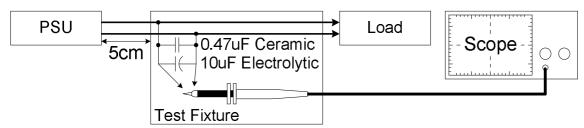

### Mechanical

Dimensions(W x L x H)		50.8 x 101.6 x 30.0 mm(2 x 4 x 1.2 in)
Weight (typ.)		0.13 kg
Tourist	Input	JST 2P
Terminal	Output	JST 4P

#### Environment

O and adding Ala Tananasal and	Operating	-10°C to +70°C
Surrounding Air Temperature	Storage	-40°C to +85°C
Davisa Da natira a		-10°C to +50°C 100% load
Power De-rating		50°C to 70°C de-rate power by 2.5% / °C, See Fig. 3
Operating Humidity		10-95% RH (Non-Condensing)
Operating Altitude		3,000 meters
Shock Test (Non-Operating)		50G, 11ms, 3 shocks for each direction
Vibration (Operating)		5-500Hz, 2.09Grms, 20 minute for each three axis



## 12V 60W / MDS-065APS12 BA

#### **Protections**

Over Voltage (max)	150%, Latch Mode
Over Load / Over Current	150%~210% of rated load current, Hiccup Mode
	(Non-Latching, Auto-Recovery)
Over Temperature	Hiccup Mode,
	(Non-Latching, Auto-Recovery)
01 4 01 11	Hiccup Mode,
Short Circuit	(Non-Latching, Auto-Recovery)
Protection Against Shock	Class I with PE* connection

<sup>\*</sup>PE: Protective Earth

### Reliability Data

MTBF (typ.)	2733k hrs based on Telecordia SR-332

### Safety Standards / Directives

Medical Safety		IEC60601-1: (Ed.3,2005), EN0601-1:2006, CAN/CSA-C22.2 No. 60601-1:08, ANSI/AAMI ES60601-1: (Ed.3,2005)
ITE Safety		IEC60950-1 (Ed.2,2005), GB4943.1-2011, GB9254-2008, GB17625.1-2003
CE		MDD Directive 93/42/EEC
Material and Parts		RoHS Directive 2011/65/EU Compliant
Galvanic Isolation	Input to Output	4000 Vac
	Input to Ground	1500 Vac
	Output to Ground	500 Vac



# 12V 60W / MDS-065APS12 BA


#### **EMC**

EMC / Emissions	EN55011, EN55022, FCC Title 47: Class B	
mmunity to		
Voltage Flicker	IEC61000-3-3	
Electrostatic Discharge	IEC61000-4-2	Level 3 Criteria A <sup>1)</sup> Air Discharge: 8kV Contact Discharge: 6kV
Radiated Field	IEC61000-4-3	Level 2 Criteria A <sup>1)</sup> 80MHz-1GHz, 3V/M with 1kHz tone / 80% modulation
Electrical Fast Transient / Burst	IEC61000-4-4	Level 3 Criteria A <sup>1)</sup> 2kV
Surge	IEC61000-4-5	Level 3 Criteria A <sup>1)</sup> Common Mode <sup>2)</sup> : 2kV Differential Mode <sup>3)</sup> : 1kV
Conducted	IEC61000-4-6	Level 2 Criteria A <sup>1)</sup> 150kHz-80MHz, 3Vrms
Power Frequency Magnetic Fields	IEC61000-4-8	Criteria A <sup>1)</sup> Magnetic field strength 3A/Meter
Voltage Dips	IEC61000-4-11	30% 10ms Criteria A ; 60% 100ms and 100% 5000ms Criteria B

- 1) Criteria A: Normal performance within the specification limits
- 2) Asymmetrical: Common mode (Line to earth)

### 3) Symmetrical: Differential mode (Line to line)

### **Block Diagram**

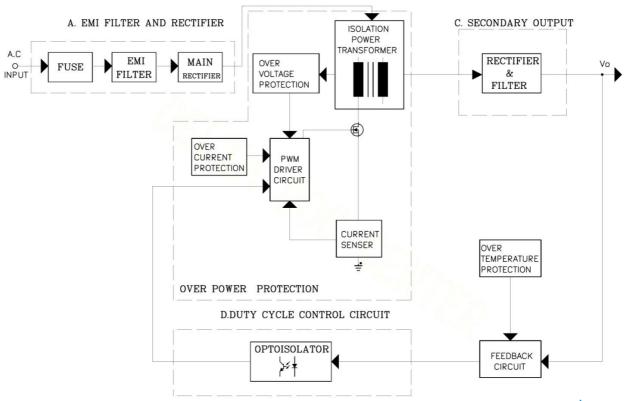





# 12V 60W / MDS-065APS12 BA

#### **Dimensions**

W x L x H: 50.8x101.6x30 mm

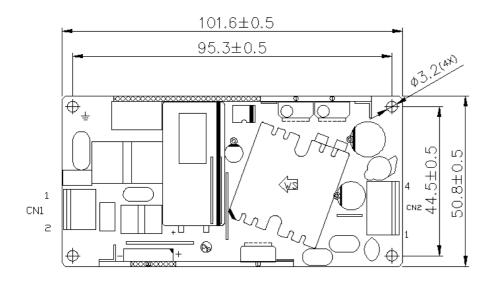



PIN ASSIGNMENT TABLE

ITEM	PIN No.	FUNCTION	CONNECTOR	
CN1 (AC)	1	L	JST B2P3-VH(LF)(SN) MATING WITH JST VHR-3N	
(AC)	2	Ν	(middle terminal should be blank)	
	1	1.37		
CN2	2	+٧	JST B4P-VH(LF)(SN)	
(DC)	3	GND	CND	MATING WITH`JŚT VHR-4N
	4	GIND		

#### **Notes**

- Dimensions are in mm
- For Open Frame type: There are 4 normal mounting holes.



## 12V 60W / MDS-065APS12 BA

### **Power De-rating**

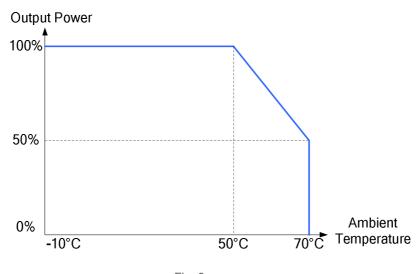


Fig. 3



# 12V 60W / MDS-065APS12 BA

#### **Functions**

#### Start-up Time

The time required for the output voltage to reach 90% of its set value, after the input voltage is applied.


#### Rise Time

The time required for the output voltage to change from 10% to 90% of its set value.

#### Hold-up Time

Hold up time is the time when the AC input collapses and output voltage retains regulation for a certain period of time. The time required for the output to reach 95% of its set value, after the input voltage is removed.

#### ■ Graph illustrating the Start-up Time, Rise Time, and Hold-up Time

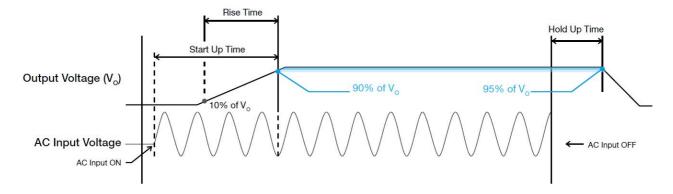




## 12V 60W / MDS-065APS12 BA

### Dynamic Response


The power supply output voltage will remain within ±3% of its steady state value, when subjected to a dynamic load 50 to 100% of its rated current.

#### ■ 50 to 100% Load



#### **Inrush Current**

Inrush current is the peak, instantaneous, input current measured and, occurs when the input voltage is first applied. For AC input voltages, the maximum peak value of inrush current will occur during the first half cycle of the applied AC voltage. This peak value decreases exponentially during subsequent cycles of AC voltage.



### Over Voltage Protection


The power supply's overvoltage circuit will be activated when its internal feedback circuit fails. The output voltage shall not exceed its specifications defined on Page 4 under "Protections". Power supply will latch off, and require removal/re-application of input AC voltage in order to restart.

### **Short Circuit Protection**

The power supply's output OLP/OCP function also provides protection against short circuits. When a short circuit is applied, the output current will operate in "Hiccup mode", as shown in the illustration in the OLP/OCP section on this page. The power supply will return to normal operation after the short circuit is removed.

#### Over Load & Over Current Protections

The power supply's Overload (OLP) and Over current (OCP) Protections will be activated when output current between 150% and 210% of Io (Max load). In such occurrence, the  $V_{\rm O}$  will start to droop and once the power supply has reached its maximum power limit, the protection is activated and the power supply will go into "Hiccup mode" (Auto-Recovery). The power supply will recover once the fault condition of the OLP and OCP is removed and  $I_{\rm O}$  is back within the specifications.

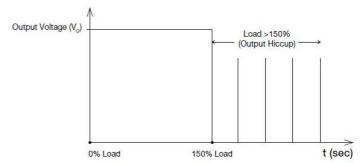

Additionally, if the  $I_{\rm O}$  is <115% but >100% for a prolong period of time (depending on the load), the Over Temperature Protection (OTP) will be activated due to high temperature on critical components. The power supply will then go into hiccup mode until the fault is removed and the mains is reapplied.

#### **Over Temperature Protection**

As mentioned above, the power supply also has Over Temperature Protection (OTP). This is activated when the overload condition persists for an extended duration and the output current is below the overload trigger point but >100% load. In the event of a higher operating condition at 100% load, the power supply will run into OTP when the surrounding air temperature is higher than the operating temperature. When activated, the output voltage will go into hiccup mode until the main is reapplied and the surrounding air temperature drops to its normal operating temperature.



## 12V 60W / MDS-065APS12 BA

#### Certificate



All Delta Medical Power products conform to the European directive 2011/65/EU. RoHS is the abbreviation for "Restriction of the use of certain hazardous substances.



Delta has been certified as meeting the requirement of ISO 13485: 2003 and EN ISO 13485:2012 for the design and manufacture of switching power supply and adaptor for medical device.



In addition to a UL Total Certification Program (TCP) approved client laboratory for IEC62368-1. Delta also has participated UL Client Test Data Program (CDTP) for IEC 60601.



# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Delta:

MDS-065APS12 BA