


SCHEMATIC

DERATING CURVE

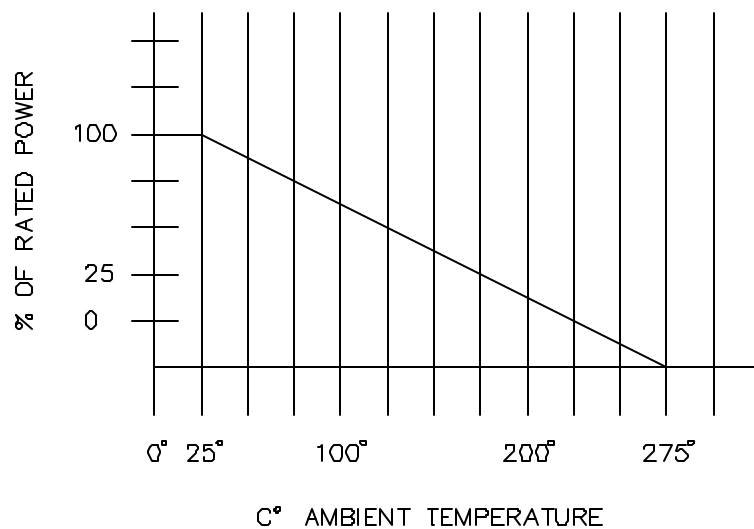

MODEL NUMBER	*RESISTANCE VALUE Ω
4391-25	25
4391-50	50
4391-75	75
4391-93	93
4391-600	600

FEATURES:

- Use to add series resistance to coaxial lines with BNC connectors

MATERIALS:

Body and Fittings: Brass, Alloy 360, ½ Hard
 Center Contact: Male – Brass, Alloy 360, ½ Hard
 Female – Beryllium Copper per ASTM B196 and B197 Cond. HT
 Outer Contact: Beryllium Copper, per ASTM B196 and B197 Cond. HT.
 Dielectric: Teflon per ASTM D1457
 Gasket/Seals: Silicone rubber per ZZ-R-765, Class 11, Grade 50

Resistor: Non-inductive film resistor
 Finish: Body and Fittings: Tarnish resistant
 Center Contact: Male – Gold plated
 Outer Contact: Tarnish resistant
 Marking: “Pomona 4391-50 2W”
 “50 Ohm Attenuator”

RATINGS:

Operating Temperature: +102° C (+216° F) Max.
 Frequency Range: DC to 500 MHz
 Resistance Tolerance $\pm 1\%$
 Power: 2W @ 25° C. Max

ORDERING INFORMATION: Model 4391
 See table above.

All dimensions are in inches. Tolerances (except noted): .xx = $\pm .02$ " (.51 mm), .xxx = $\pm .005$ " (.127 mm).
 All specifications are to the latest revisions. Specifications are subject to change without notice.
 Registered trademarks are the property of their respective companies. Made in USA

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pomona:

[4391-50](#) [4391-75](#)