




APPLICATIONS

PNP Epitaxial Darlington Transistor. High DC Current Gain.
Monolithic Construction with Built-In Base-Emitter Shunt Resistors.

ABSOLUTE MAXIMUM RATINGS ($T_a=25$)

T_{stg}	—Storage Temperature.....	-55~150
T_j	—Junction Temperature.....	150
P_C	—Collector Dissipation($T_c=25$).....	65W
P_C	—Collector Dissipation ($T_a=25$)	2W
V_{CBO}	—Collector-Base Voltage.....	-100V
V_{CEO}	—Collector-Emitter Voltage.....	-100V
V_{EBO}	—Emitter-Base Voltage.....	-5V
I_C	—Collector Current(DC).....	-5A
I_C	—Collector Current (Pulse)	-8A
I_b	—Base Current.....	-120mA

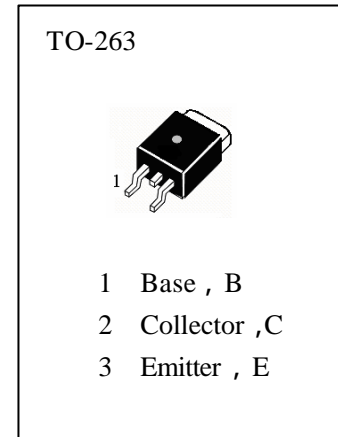

ELECTRICAL CHARACTERISTICS ($T_a=25$)

Symbol	Characteristics	Min	Typ	Max	Unit	Test Conditions
BV _{CBO}	Collector-Base Breakdown Voltage	-100			V	$I_C=-1mA, I_E=0$
BV _{CEO}	Collector-Emitter Breakdown Voltage	-100			V	$I_C=-5mA, I_B=0$
H _{FE}	*DC Current Gain	1000				$V_{CE}=-3V, I_C=-0.5A$
V _{CE(sat1)}	*Collector- Emitter Saturation Voltage			-2.0	V	$I_C=-3A, I_B=-12mA$
V _{CE(sat2)}	*Collector- Emitter Saturation Voltage			-4.0	V	$I_C=-3A, I_B=-20mA$
V _{BE(ON)}	*Base-Emitter On Voltage			-2.5	V	$V_{CE}=-3V, I_C=-3A$
I _{CEO}	Collector Cut-off Current			-0.5	mA	$V_{CB}=-50V, I_B=0$
I _{CBO}	Collector Cut-off Current			-0.2	mA	$V_{CB}=-100V, I_E=0$
I _{EBO}	Emitter Cut-off Current			-2.0	mA	$V_{EB}=-5V, I_C=0$
C _{ob}	Output Capacitance			300	pF	$V_{CB}=-10V, I_E=0, f=0.1MHz$

*Pulse Test : PW 300 μs , Duty cycle 2%

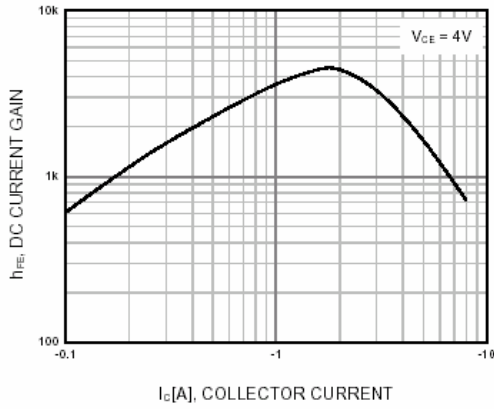


Figure 1. DC current Gain

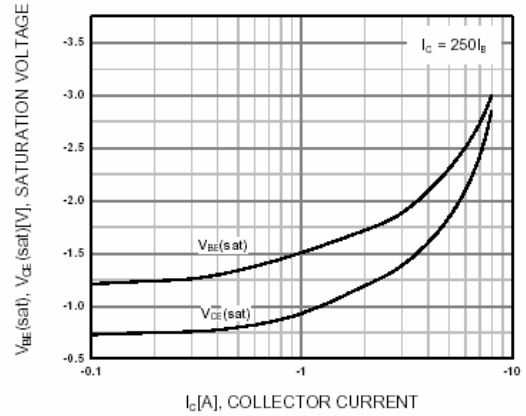


Figure 2. Base-Emitter Saturation Voltage
Collector-Emitter Saturation Voltage

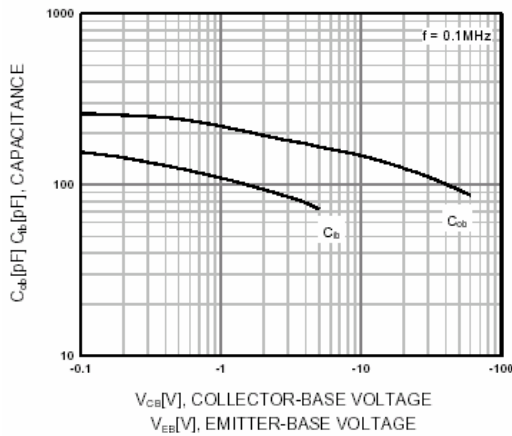


Figure 3. Output and Input Capacitance
vs. Reverse Voltage

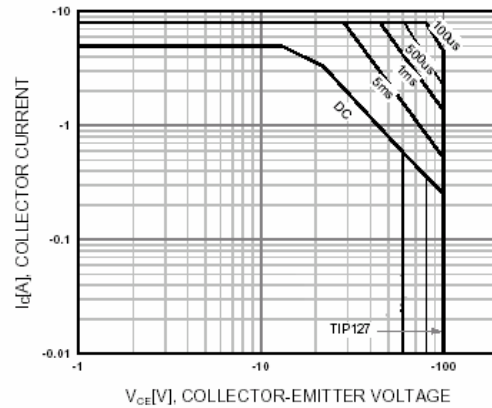


Figure 4. Safe Operating Area

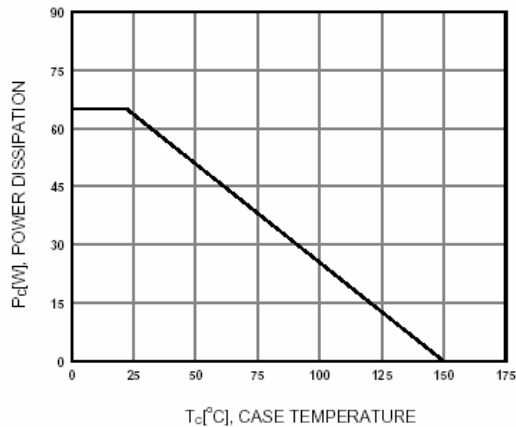


Figure 5. Power Derating