



1. MATERIALS AND FINISHES:
BODY & COUPLING NUT - BRASS, NICKEL PLATING
CONTACT - BERYLLIUM COPPER, GOLD PLATING
INSULATOR - PTFE
GASKET - RUBBER
2. ELECTRICAL:
A. IMPEDANCE: 75 OHM
B. FREQUENCY RANGE: DC - 4 GHz
C. RETURN LOSS: 28 dB MIN.
3. MECHANICAL:
A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: -65° C TO +165° C
4. PACKAGING:
A. QUANTITY: SINGLE PACK
B. MARKING: BAG TO BE MARKED
"AMPHENOLRF, APH-BNCP-HDBNCJ, AND DATE CODE"

REVISIONS

REV	DESCRIPTION	DATE	ECO	APPR
A	RELEASE TO MFG.	8/3/10	48170	CL

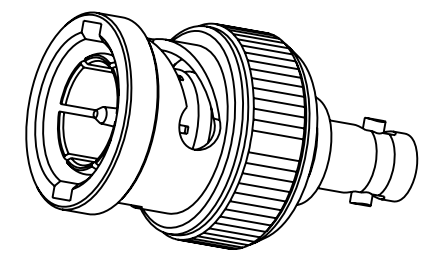

SCALE 2.000

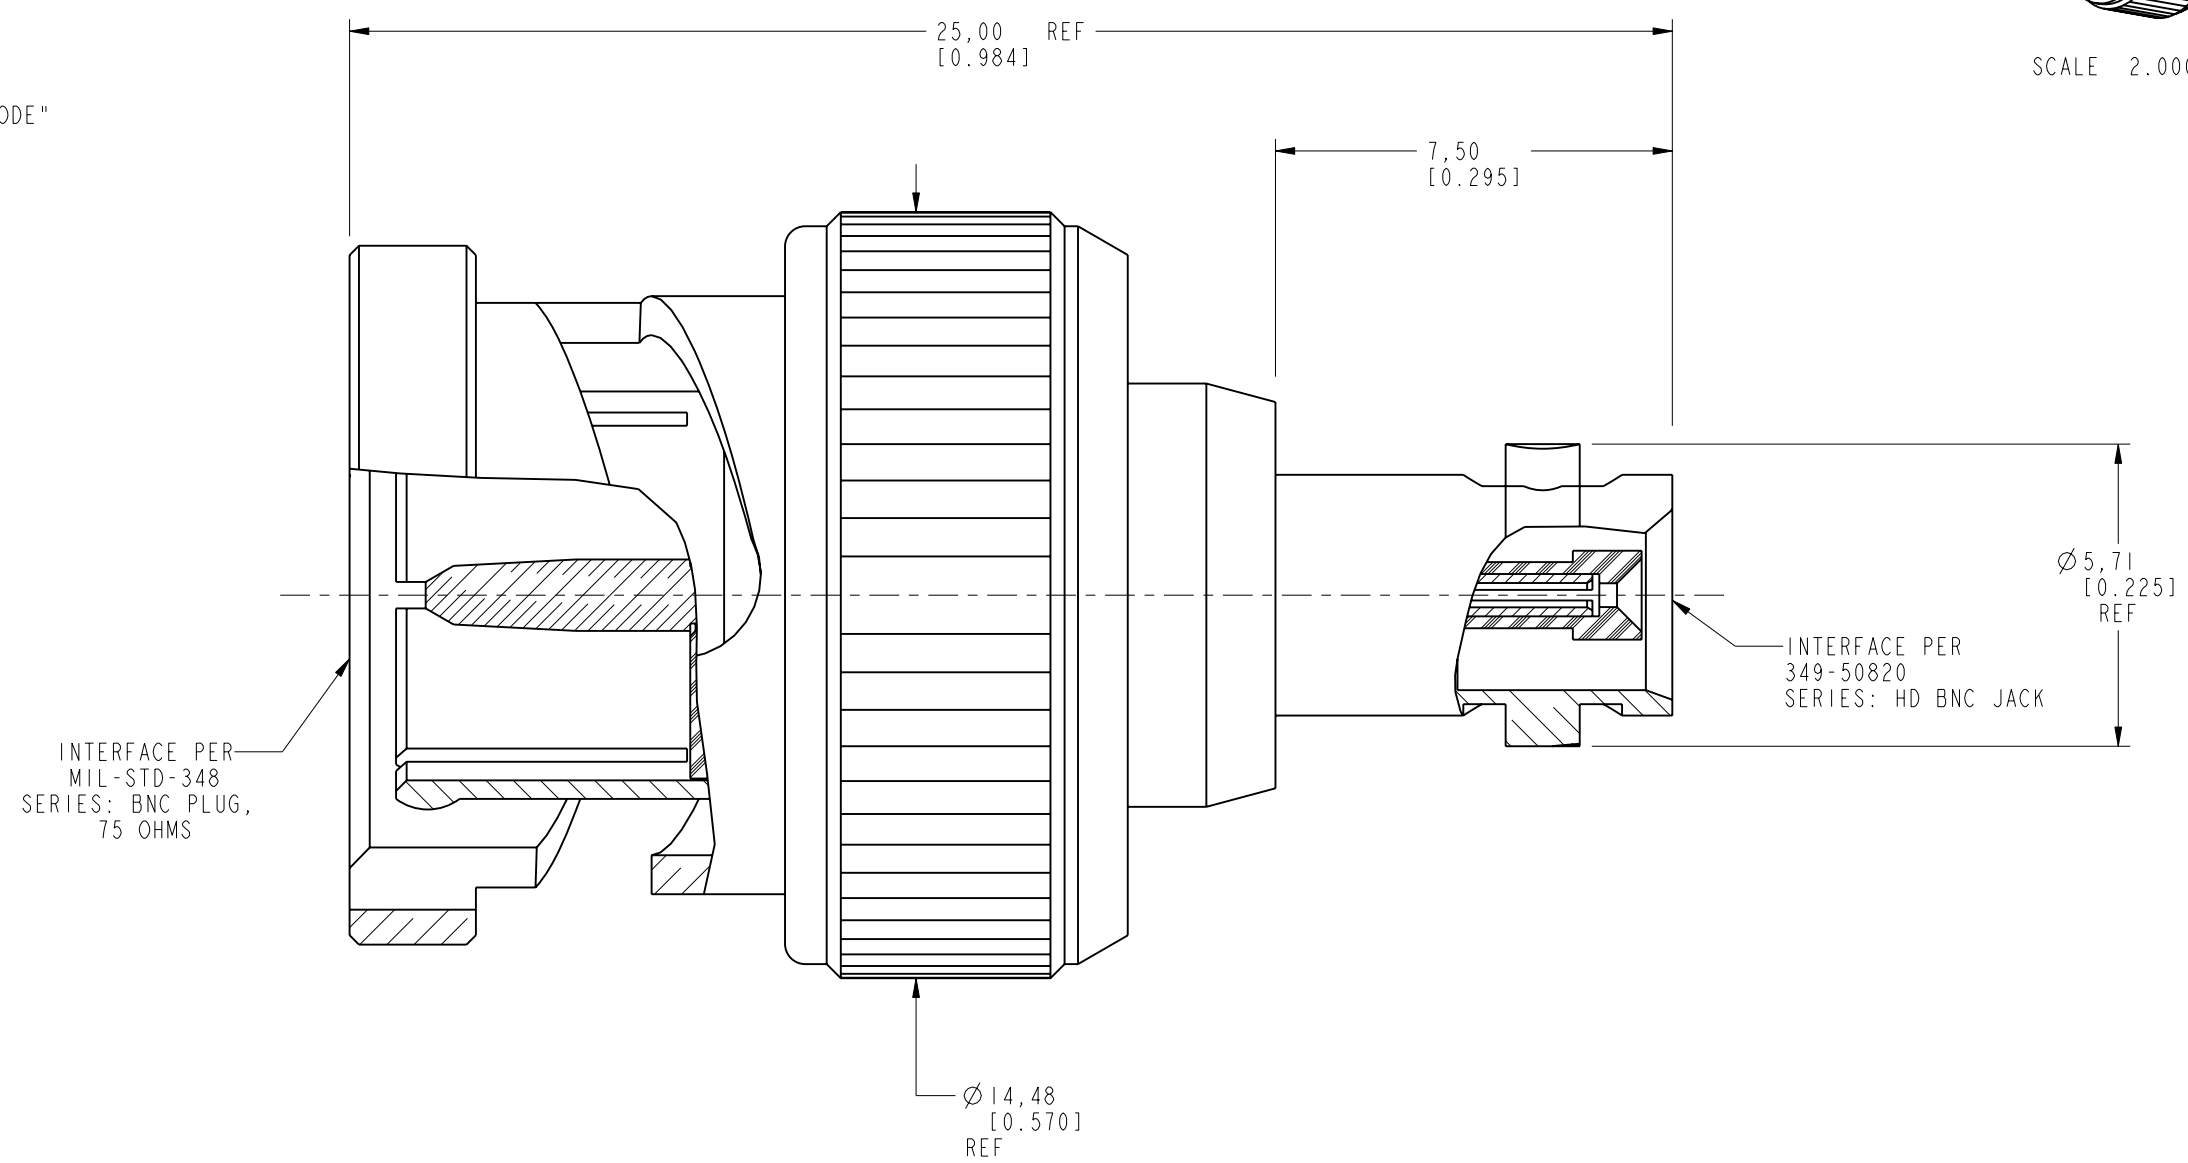

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm 0.5 - 6mm 6 - 30mm 30 - 120mm ANGLES ± 0.05mm ±0.1mm ±0.2mm ± 0.3mm ±1°	MATERIAL SEE NOTES	DRAWN S.LI	DATE 07-Jul-10	TITLE BNC PLUG TO HD-BNC JACK, 75 OHM ADAPTER		Amphenol RF Danbury CT USA, Tainan, Taiwan, Shenzhen, China www.amphenolrf.com	
ENGINEER CLEMENT		DATE 29-Mar-10					
REFERENCE EAR #		DATE 18-Oct-10					
CONFIGURATION LEVEL: =%%Z0HXIBGC=		APPROVED S.HSIEH	SCALE: 4.0:1.0	SHEET 2 OF 2	DRAWING NO. APH-BNCP-HDBNCJ		
FINISH		CAD FILE Root Folder/BNC/APH-BNCP-HDBNCJ	DWG SIZE B	REV A	ITEM NO. APH-BNCP-HDBNCJ PART NO. APH-BNCP-HDBNCJ		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[APH-BNCP-HDBNCJ](#)