



Approved by:

Checked by:

Issued by:

# **SPECIFICATION**

PRODUCT: SAW FILTER


MODEL: HB4302N (X6964D) SIP5D

**HOPE MICROELECTRONICS CO.,LIMITED**


## 1. Construction

### 1.1 Dimension and materials

Type : B4302N

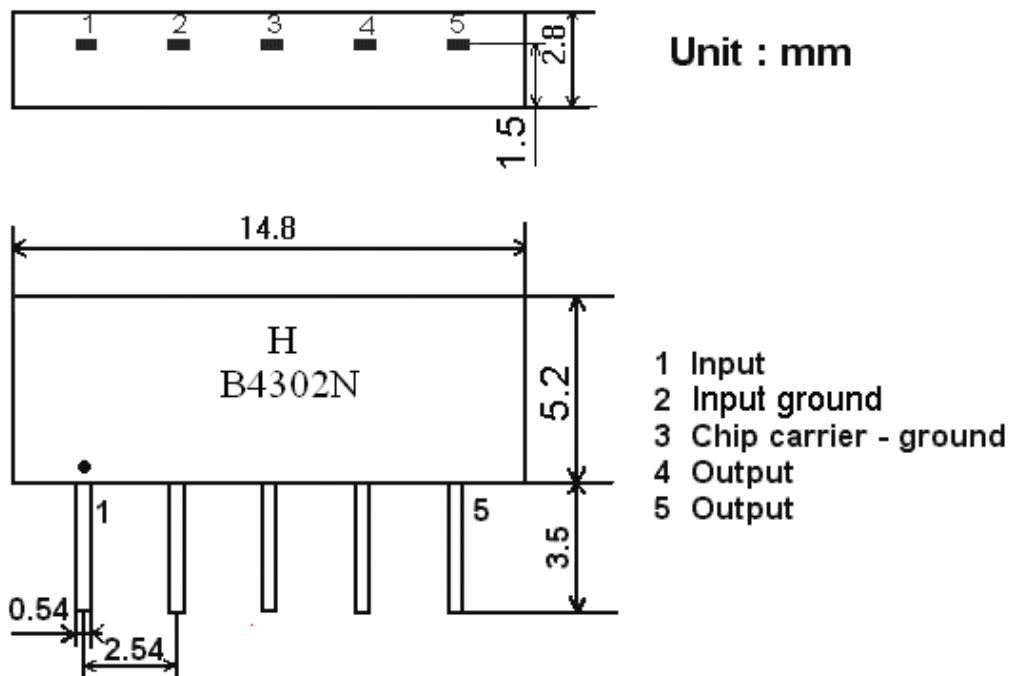

### 1.2. Circuit construction, measurement circuit

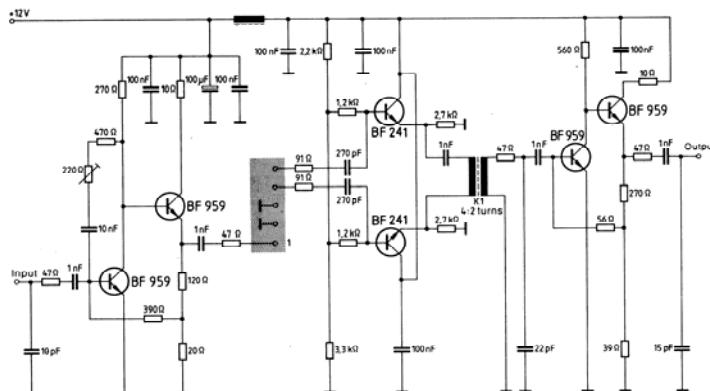

Test circuit for SIP-5 filter  
Input impedance of the symmetrical post-amplifier:  $2\text{ k}\Omega$  in parallel with  $3\text{ pF}$

## 2. Characteristics

### Standard atmospheric conditions

Unless otherwise specified, the standard range of atmospheric conditions for making measurements and tests is as follows;

Ambient temperature :  $15^\circ\text{C}$  to  $35^\circ\text{C}$

Relative humidity : 25% to 85%

Air pressure : 86kPa to 106kPa

### Operating temperature rang

Operating temperature rang is the rang of ambient temperatures in which the filter can be operated continuously.  $-10^{\circ}\text{C} \sim +60^{\circ}\text{C}$

### Storage temperature rang

Storage temperature rang is the rang of ambient temperatures at which the filter can be stored without damage.

Conditions are as specified elsewhere in these specifications.  $-40^{\circ}\text{C} \sim +70^{\circ}\text{C}$

**Reference temperature**  $+25^{\circ}\text{C}$

## 2.1 Maximum Rating

<b>DC voltage</b>	<b>VDC</b>	<b>12</b>	<b>V</b>	<b>Between any terminals</b>	
<b>AC voltage</b>	<b>Vpp</b>	<b>10</b>	<b>V</b>	<b>Between any terminals</b>	

## 2.2 Electrical Characteristics

Source impedance  $Z_s=50 \Omega$

Load impedance  $Z_L=2k \Omega //3pF$   $T_A=25^{\circ}\text{C}$

	Freq	min	typ	max	
<b>Center frequency</b>	Fo	43.71	43.81	43.91	MHz
<b>Insertion attenuation</b> Reference level	43.81MHz	13.0	14.8	16.6	dB
<b>Pass bandwidth</b>	$B_{3dB}$	-	6.0	-	MHz
	$B_{30dB}$	-	7.0	-	MHz
<b>Relative attenuation</b>	41.28MHz	-	0.3	-	dB
	46.34MHz	-1.0	0.2	1.4	dB
	40.81MHz	1.2	2.7	4.2	dB
	46.81MHz	1.2	2.7	4.2	dB
	39.81MHz	36.0	52.0	-	dB
	47.81MHz	35.0	50.0	-	dB
	35.06~39.06MHz	38.0	47.0		dB
<b>Sidelobe</b>	39.06~39.81MHz	35.0	41.0		dB
	47.81~50.06MHz	34.0	40.0		dB
	50.06~55.06MHz	38.0	45.0		dB
<b>Reflected wave signal suppression</b> 1.3 us ... 6.0 us after main pulse (test pulse 250 ns , carrier frequency 43.81 MHz)		42.0	52.0		dB
<b>Feedthrough signal suppression</b> 1.3 us ... 1.2 us before main pulse (test pulse 250 ns , carrier frequency 43.81 MHz)		45.0	54.0		dB

<b>Group delay ripple (p-p)</b> 40.81 ~ 46.81 Mhz	-	50	-	ns
<b>Impedance at 43.81 Mhz</b> Input: $Z_{in} = R_{in}/C_{in}$ Output: $Z_{in} = R_{in}/C_{in}$	-	-	-	-
<b>Temperature coefficient</b>	-	1.1//16.4 1.1//5.0	-	$k\Omega //pF$ $k\Omega //pF$


### 2.3 Environmental Performance Characteristics

Item Test condition	Allowable change of absolute Level at center frequency(dB)
High temperature test 70°C 1000H	< 1.0
Low temperature test -40°C 1000H	< 1.0
Humidity test 40°C 90-95% 1000H	< 1.0
Thermal shock -20°C==25°C==80°C 20 cycle 30M 10M 30M	< 1.0
Solder temperature test Sold temp.260°C for 10 sec.	< 1.0
Soldering Immerse the pins melt solder at 260°C+5/-0°C for 5 sec.	More then 95% of total area of the pins should be covered with solder

### 2.4 Mechanical Test


Item Test condition	Allowable change of absolute Level at center frequency(dB)
Vibration test 600-3300rpm amplitude 1.5mm 3 directions 2 H each	<1.0
Drop test On maple plate from 1 m high 3 times	<1.0
Lead pull test Pull with 1 kg force for 30 seconds	<1.0
Lead bend test 90° bending with 500g weigh 2 times	<1.0

## 2.5 Voltage Discharge Test


Item Test condition	Allowable change of absolute Level at center frequency(dB)
Surge test Between any two electrode	 $<1.0$

## 2.6 Frequency response:

►1: Transmission /M Log Mag 10.0 dB/ Ref -15.00 dB  
 ►2: Off

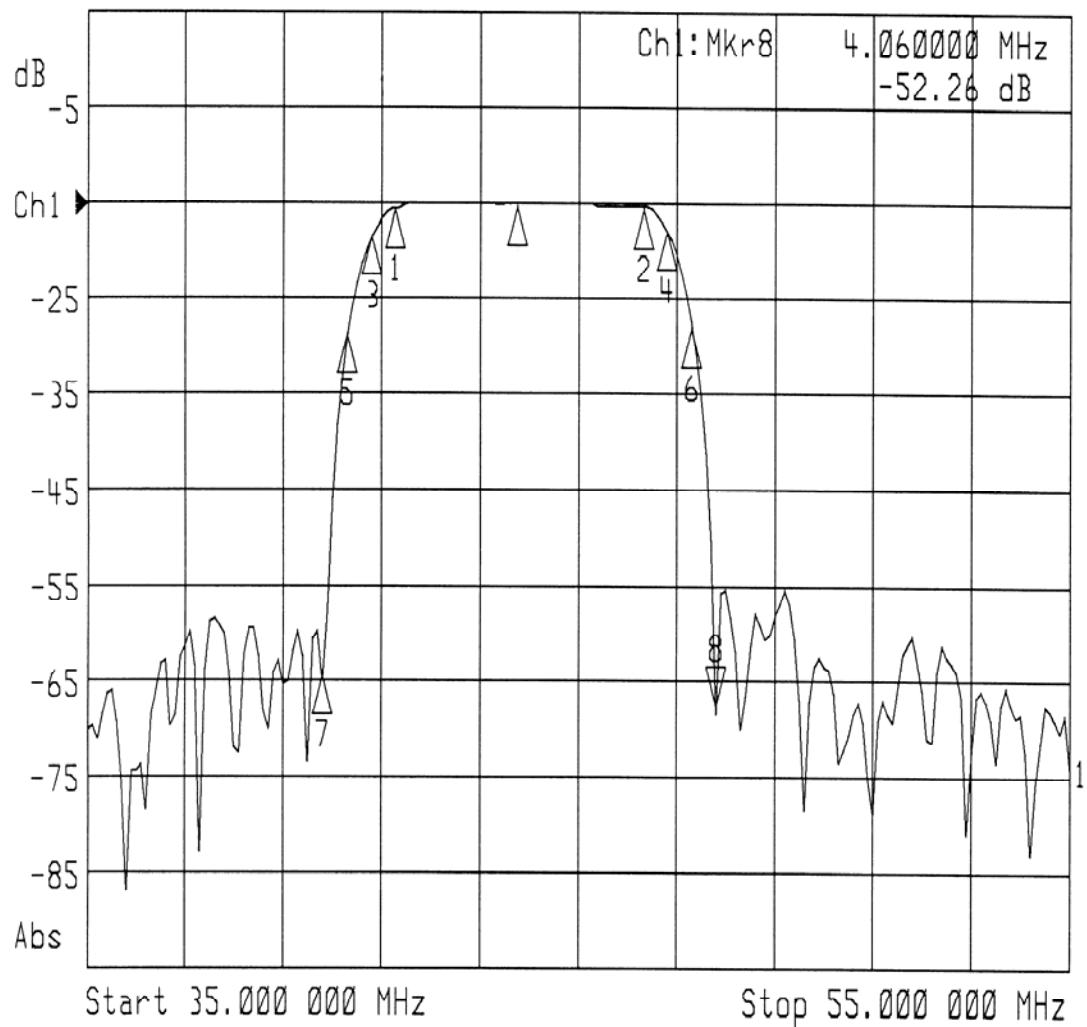


CH1 S21 delay 30 ns/ REF 1.183  $\mu$ s 3 1.2189  $\mu$ s  
CH2 S21 log MAG 1 dB/ REF -14.88 dB 3: .0192 dB

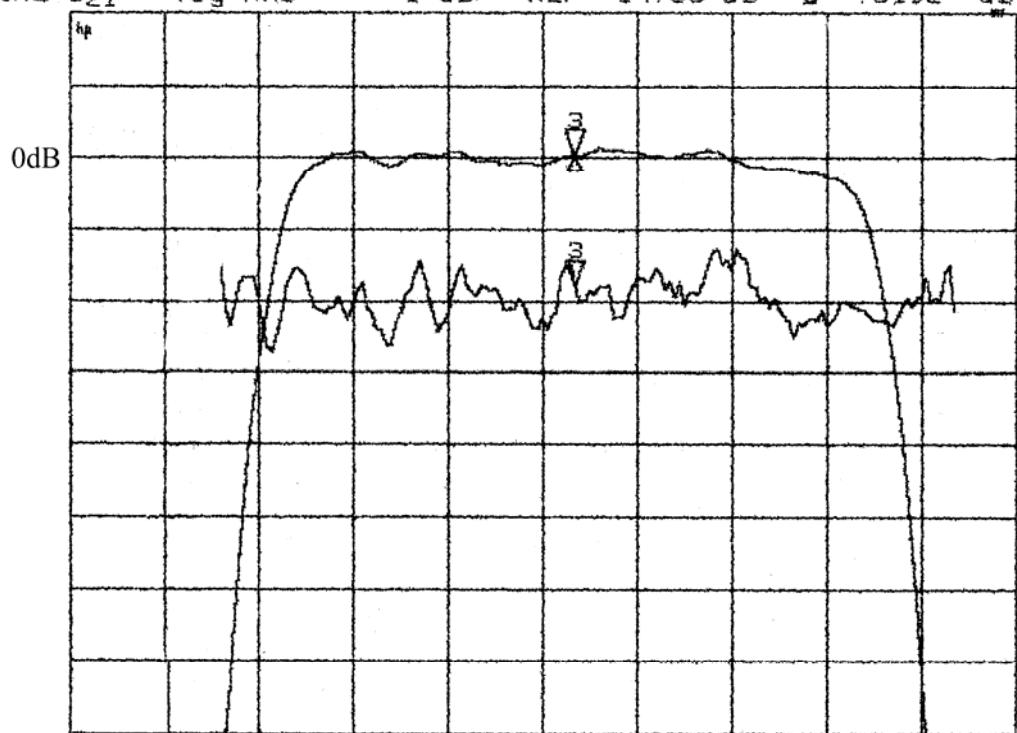

START 39.000 000 MHz STOP 48.000 000 MHz

CH2 S21 log MAG 10 dB/ REF -16.23 dB

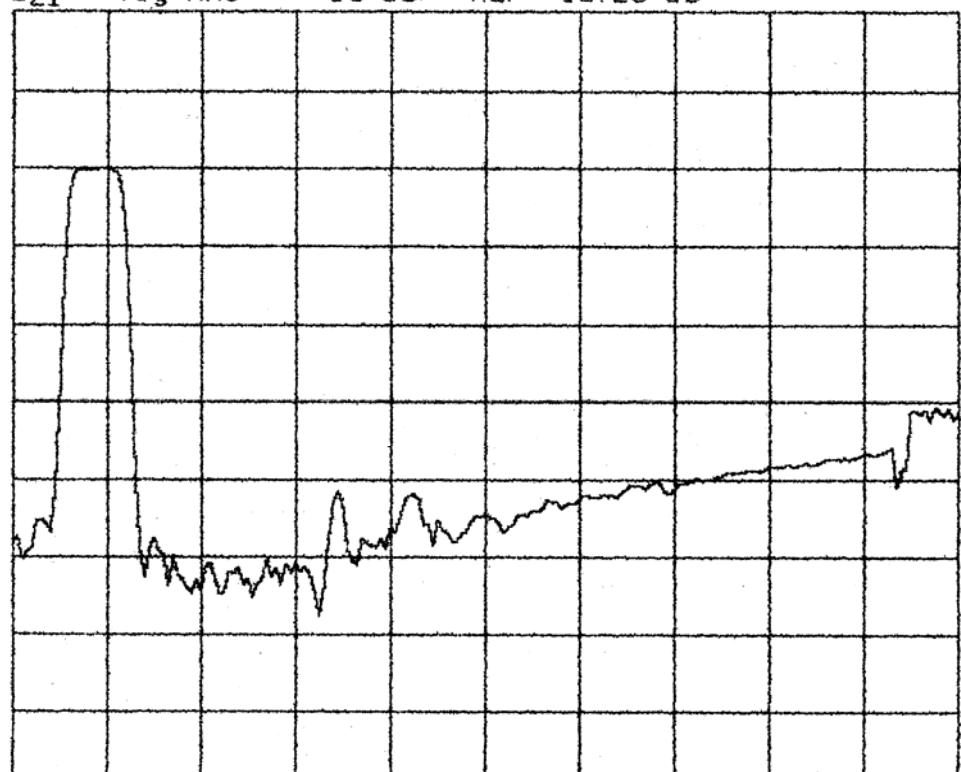

START 35.000 000 MHz STOP 135.000 000 MHz

**Time domain response:**

