



# Jacks

163-1021, 163-1025

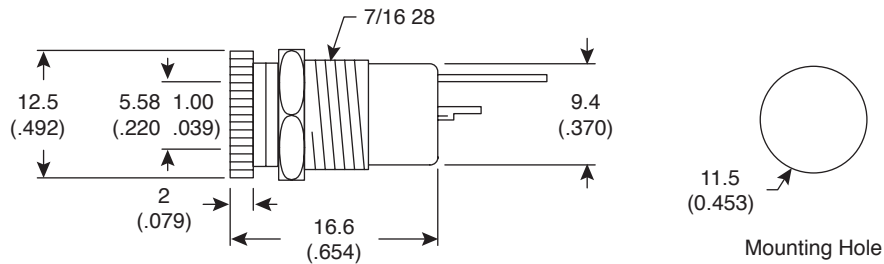

Jacks



**DIMENSIONS: (In.)**  
(except where noted)

SPECIFICATIONS	
Type:	Chassis mount DC power w/solder lugs
Insulation resistance:	>50MΩ min. @ 100V
Contact resistance:	30mΩ max.
Dielectric strength:	250Vrms for 1 minute
Pin size:	ø2.1 +0 -.05mm(163-1021), ø2.5 +0 -.05mm(163-1025)
Case:	Nickel plated brass
Insulator:	PBT
Terminals:	Nickel plated brass
Max. voltage rating:	250 VAC @ 1A
Spring:	Nickel plated copper

Date Last Revised: 10-14-05

Available from Mouser Electronics  
1-800-346-6873  
www.mouser.com

KC-300373

163-1021, 163-1025