



Front Panel Adapters with Pre-Wired Cable

**GE Fanuc
Series 90-30
Digital Input
8 Channel**

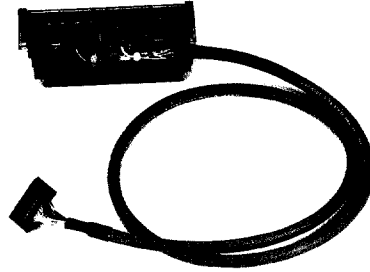

**GE Fanuc
Series 90-30
Digital Output
8 Channel**

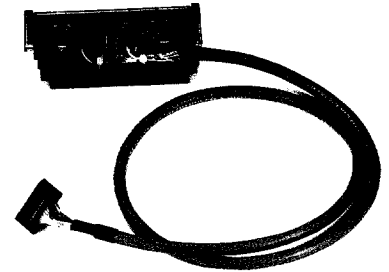

Technical Data


		2 wire 24 VDC		2 wire 12-24 VDC		2 wire 12-24 VDC		2 wire 12-24 VDC	
Type	IC693MDL	634		730	731	732		733	
Part number	Cable Length	0.5 m	998004	998018	998022	998191		998026	
		1.0 m	998005	998019	998023	998192		998027	
		1.5 m	998006	998020	998024	998193		998028	
		2.0 m	998007	998021	998025	998194		998029	
Rated voltage		See Above		See Above					
Rated current per signal line		3.0 A per circuit / 12.0 per cable		3.0 A per circuit / 12.0 per cable					
Cable connection		(1) 1 x 20 pin IDC		(1) 1 x 20 pin IDC					
Operating temperature		-20°C...+50°C		-20°C...+50°C					
Storage temperature		-20°C...+60°C		-20°C...+60°C					
Approvals									

Connection Wiring


Connection Wiring

	IDC Conn	Wire Color	2 wire 24 VDC		IDC Conn	Wire Color	2 wire 12-24 VDC	2 wire 12-24 VDC	2 wire 12-24 VDC	2 wire 12-24 VDC
	01	Blk	1		01	Blk	2	20	1	10
	02	Brn	1		02	Brn	2	20	1	10
	03	Red	2		03	Red	4	4	2	2
	04	Org	N/C		04	Org	N/C	N/C	N/C	N/C
	05	Yel	3		05	Yel	6	6	3	3
	06	Grn	N/C		06	Grn	N/C	N/C	N/C	N/C
	07	Blu	4		07	Blu	8	8	4	4
	08	Violet	N/C		08	Violet	N/C	N/C	N/C	N/C
	09	Gray	5		09	Gray	10	10	5	5
	10	White	N/C		10	White	N/C	N/C	N/C	N/C
	11	Wht/Blk	6		11	Wht/Blk	12	12	6	6
	12	Wht/Brn	N/C		12	Wht/Brn	N/C	N/C	N/C	N/C
	13	Wht/Red	7		13	Wht/Red	14	14	7	7
	14	Wht/Org	N/C		14	Wht/Org	N/C	N/C	N/C	N/C
	15	Wht/Yel	8		15	Wht/Yel	16	16	8	8
	16	Wht/Grn	N/C		16	Wht/Grn	N/C	N/C	N/C	N/C
	17	Wht/Blu	9		17	Wht/Blu	18	18	9	9
	18	Wht/Violet	N/C		18	Wht/Violet	N/C	N/C	N/C	N/C
	19	Wht/Gray	N/C		19	Wht/Gray	20	2	10	1
	20	Wht/Blk/Brn	N/C		20	Wht/Blk/Brn	20	2	10	1


**GE Fanuc
Series 90-30
Digital Output
12 Channel**

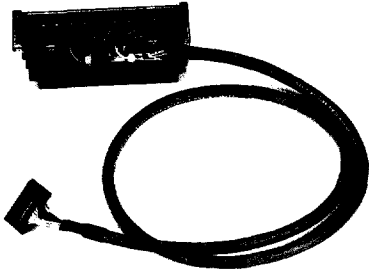

**GE Fanuc
Series 90-30
Digital Input
16 Channel**

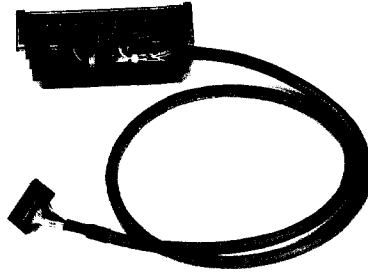

**GE Fanuc
Series 90-30
Digital Input
16 Channel**

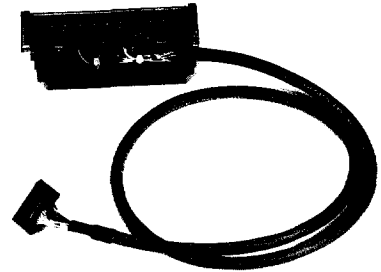

2 wire 120 VAC	2 wire 2 wire Disconnect 120 VAC	3 wire 120 VAC	2 wire 2 wire Disconnect 24 VDC, 24 VAC/DC	3 wire 24 VAC
310	240	240	241	241
998056	919724	919731	915802	915809
998057	919725	919732	915803	915810
998058	919726	919733	915804	915811
998059	919730	919737	915808	915815
120 VAC	120 VAC		See Above	
3.0 A per circuit / 12.0 per cable	3.0 A per circuit / 12.0 per cable		3.0 A per circuit / 2.0 per cable	
(1) 1 x 20 pin IDC	(1) 1 x 20 pin IDC		(1) 1 x 20 pin IDC	
-20°C...+50°C	-20°C...+50°C		-20°C...+50°C	
-20°C...+60°C	-20°C...+60°C		-20°C...+60°C	

Connection Wiring

Connection Wiring

Connection Wiring

IDC Conn	Wire Color	2 wire 120 VAC	IDC Conn	Wire Color	2 wire 2 wire Disconnect 120 VAC	3 wire 120 VAC	IDC Conn	Wire Color	2 wire 2 wire Disconnect 24 VDC, 24 VAC/DC	3 wire 24 VAC
01	Blk	9	01	Blk	19	19	01	Blk	1	1
02	Brn	19	02	Brn	19	N/C	02	Brn	1	N/C
03	Red	1	03	Red	1	1	03	Red	2	2
04	Org	2	04	Org	2	2	04	Org	3	3
05	Yel	3	05	Yel	3	3	05	Yel	4	4
06	Grn	4	06	Grn	4	4	06	Grn	5	5
07	Blu	5	07	Blu	5	5	07	Blu	6	6
08	Violet	6	08	Violet	6	6	08	Violet	7	7
09	Gray	N/C	09	Gray	7	7	09	Gray	8	8
10	White	N/C	10	White	8	8	10	White	9	9
11	Wht/Blk	11	11	Wht/Blk	9	9	11	Wht/Blk	10	10
12	Wht/Brn	12	12	Wht/Brn	10	10	12	Wht/Brn	11	11
13	Wht/Red	13	13	Wht/Red	11	11	13	Wht/Red	12	12
14	Wht/Org	14	14	Wht/Org	12	12	14	Wht/Org	13	13
15	Wht/Yel	15	15	Wht/Yel	13	13	15	Wht/Yel	14	14
16	Wht/Grn	16	16	Wht/Grn	14	14	16	Wht/Grn	15	15
17	Wht/Blu	N/C	17	Wht/Blu	15	15	17	Wht/Blu	16	16
18	Wht/Violet	N/C	18	Wht/Violet	16	16	18	Wht/Violet	17	17
19	Wht/Gray	N/C	19	Wht/Gray	N/C	N/C	19	Wht/Gray	N/C	N/C
20	Wht/Blk/Brn	N/C	20	Wht/Blk/Brn	N/C	N/C	20	Wht/Blk/Brn	N/C	N/C

PLC INTERFACE PRODUCTS
FRONT PANEL ADAPTERS