

**Product Features**

- 50 ~ 3000MHz
- GaAs MMIC
- 43dBm Output IP3
- 14.0dB Gain
- 22dBm P1 dB
- Single +5V Supply
- SOT-89 SMT Package

**Application**

- CDMA, W-CDMA Medium Power Amplifier
- High Linearity Drive Amplifier



Package Type: SOT-89

**Description**

AP205A is a high linearity amplifier designed with GaAs MMIC in a low cost SOT-89 package. It is designed for applications such as GSM, CDMA, W-CDMA drive devices which require high IP3.

**Absolute Maximum Ratings**

PARAMETER	UNIT	MIN	MAX
Device Voltage	VDC		+9
RF Input Power(Continuous)	dBm		+7
Storage Temperature	°C	-40	+150

**Operating Ranges**


PARAMETER	UNIT	MIN	TYP	MAX
Operating Frequency	MHz	50		3000
Device Voltage	VDC		+5	+6
Case Temperature	°C	-40		+85

**Electrical Specifications**(Ta=+25 °C, V<sub>DD</sub>=+5V, Test Freq=900 MHz)

PARAMETER	Units	Min	Typ	Max
Gain (S <sub>21</sub> )	dB	12	14	
Input Return Loss (S <sub>11</sub> )	dB		-17	
Output Return Loss (S <sub>22</sub> )	dB		-15	
Output 3 <sup>rd</sup> Order Intercept Point (OIP3)	dBm	38	43	
Output 1dB compression Point (P <sub>1</sub> dB)	dBm		22	
Noise Figure	dB		2.3	
DC Operating Current	mA	90	115	140
Supply Voltage	Vdc		+5V	
Thermal Resistance (R <sub>th</sub> )	°C/W			50

OIP3 is measured with two tones, at an output power of +10dBm/tone separated by 1MHz.


Application Circuit (900MHz)

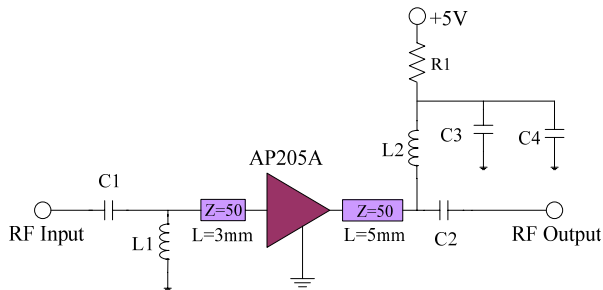


Bill of Material

Parameter		Parameter	
C1	51 pF	L1	8.2 nH
C2	330 pF	L2	18 nH
C3	100 pF	R1	0 Ω
C4	0.1 uF		


S-Parameter vs. Frequency

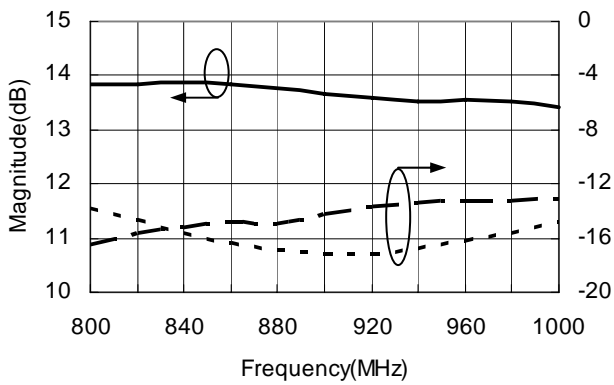


OIP3 vs. Frequency

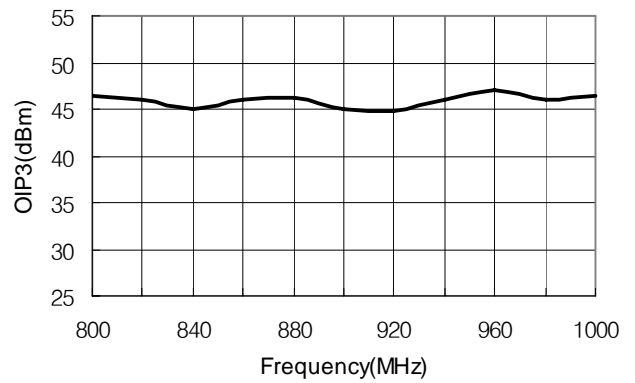


Noise Figure vs. Frequency

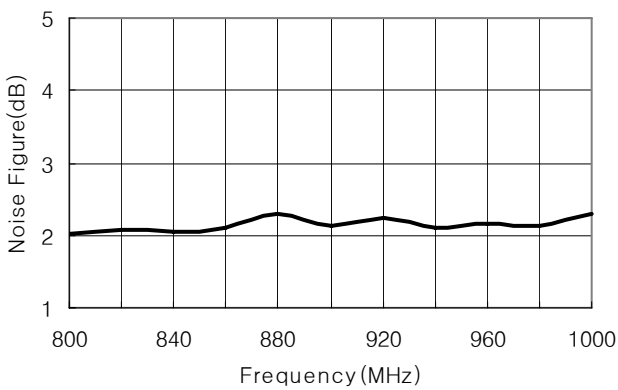

P1dB vs. Frequency

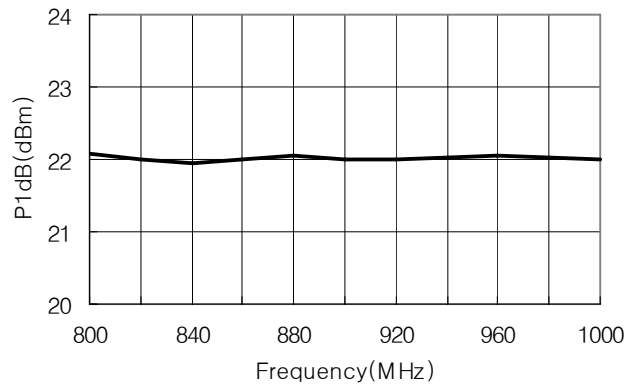


Application Circuit (1800MHz)

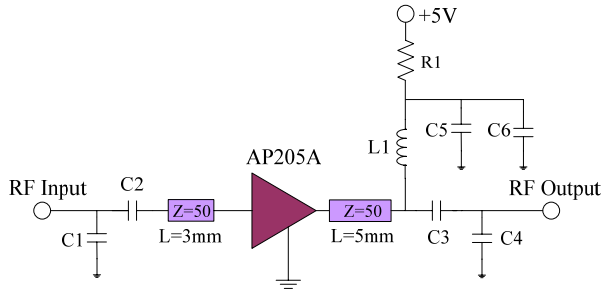


Bill of Material

Parameter		Parameter	
C1	2.0 pF	C6	0.1 uF
C2,C3	100 pF	L1	18 nH
C4	1.0 pF	R1	0 Ω
C5	100 pF		


S-Parameter vs. Frequency

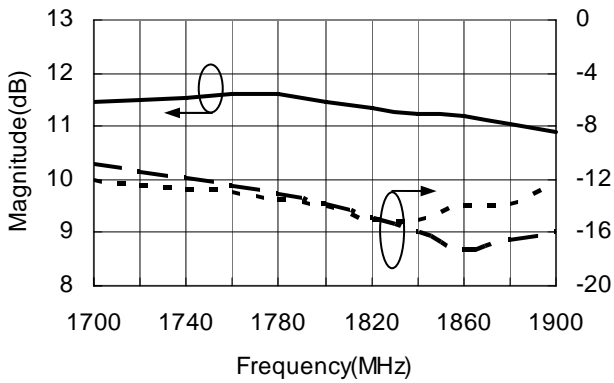


OIP3 vs. Frequency

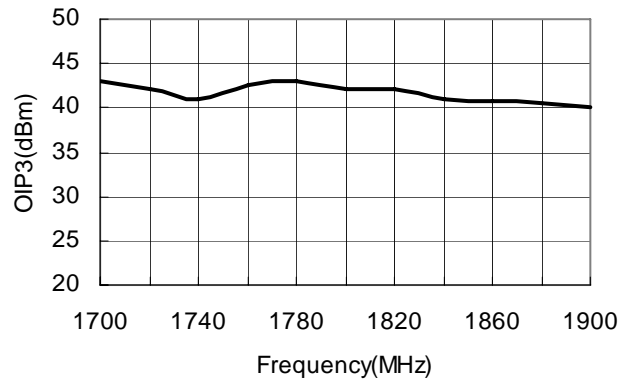


Noise Figure vs. Frequency

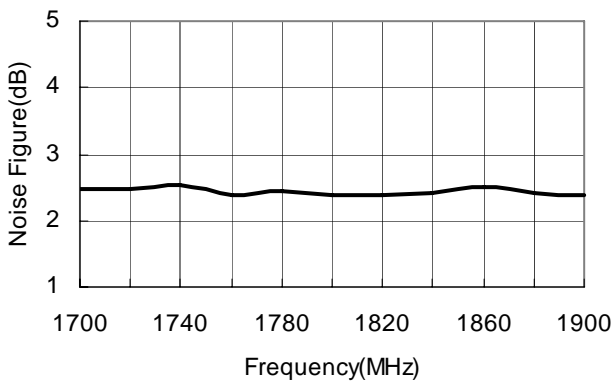

P1dB vs. Frequency

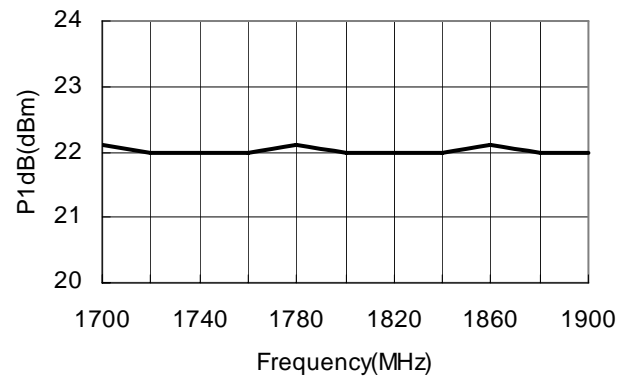


Application Circuit (2100MHz)

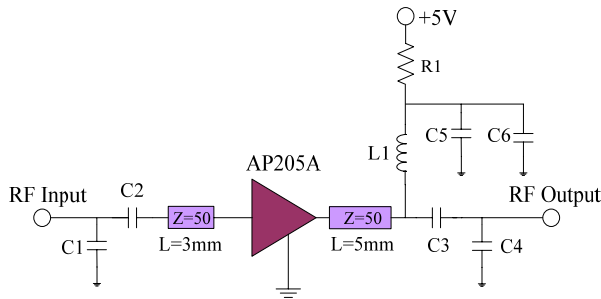


Bill of Material

Parameter		Parameter	
C1	1.5 pF	C6	0.1 uF
C2 ,C3	100 pF	L1	18 nH
C4	1.0 pF	R1	0 Ω
C5	100 pF		


S-Parameter vs. Frequency

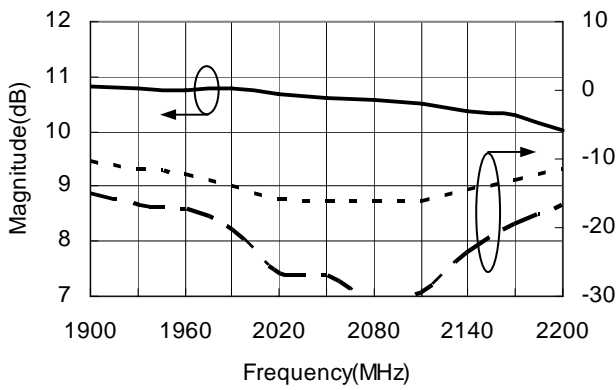


OIP3 vs. Frequency

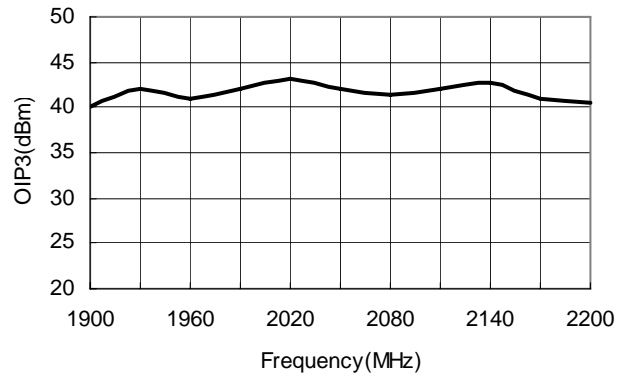


Noise Figure vs. Frequency

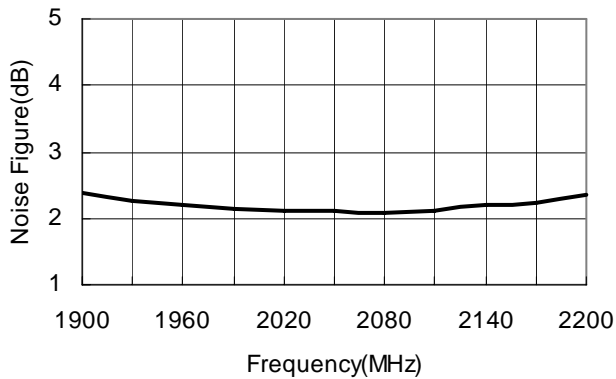

P1dB vs. Frequency

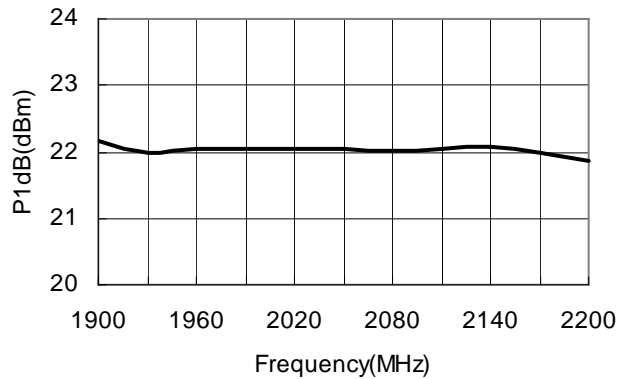


Application Circuit (2300MHz)

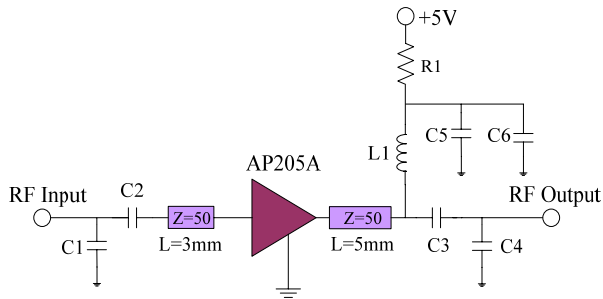


Bill of Material

Parameter		Parameter	
C1	1.5 pF	C5	100 pF
C2	33 pF	C6	0.1 uF
C3	39 pF	L1	18 nH
C4	1.0 pF	R1	0 Ω


S-Parameter vs. Frequency

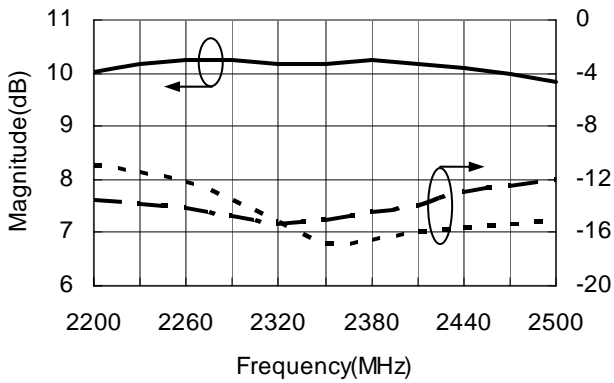


OIP3 vs. Frequency

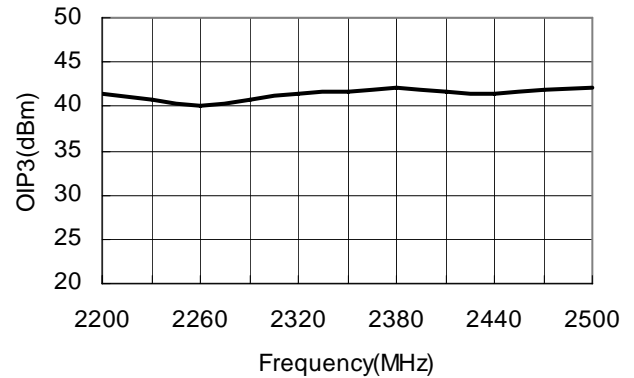


Noise Figure vs. Frequency

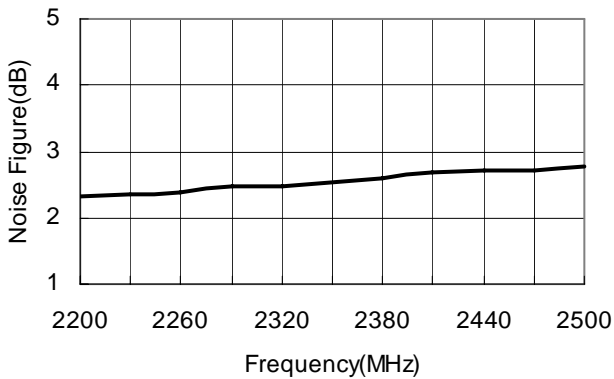

P1dB vs. Frequency

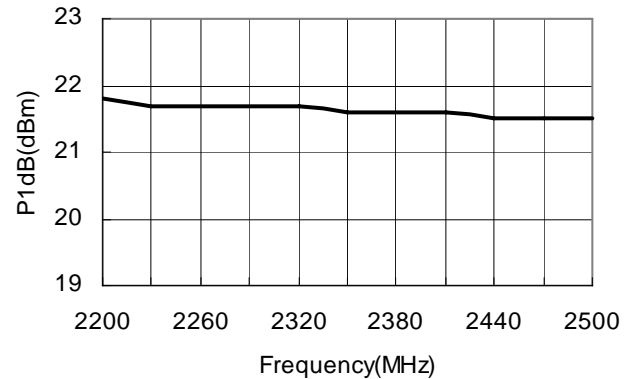


Application Circuit (2600MHz)

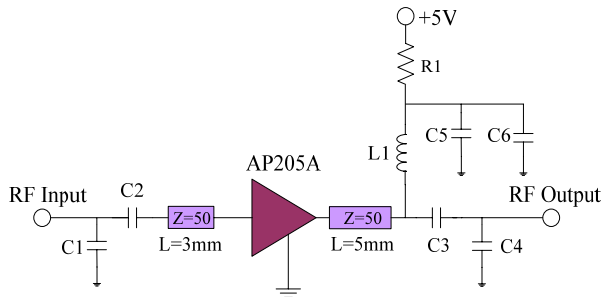


Bill of Material

Parameter		Parameter	
C1	1.5 pF	C5	100 pF
C2	8.0 pF	C6	0.1 uF
C3	15 pF	L1	18 nH
C4	0.5 pF	R1	0 Ω


S-Parameter vs. Frequency

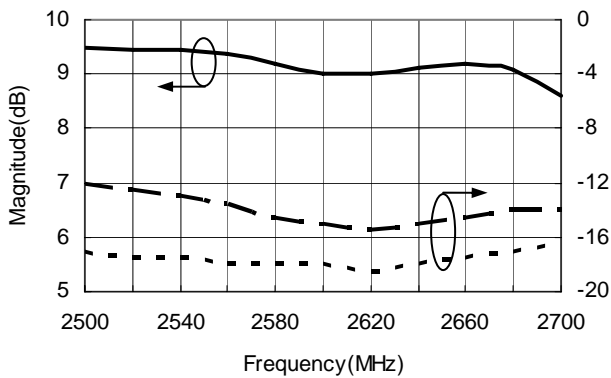


OIP3 vs. Frequency

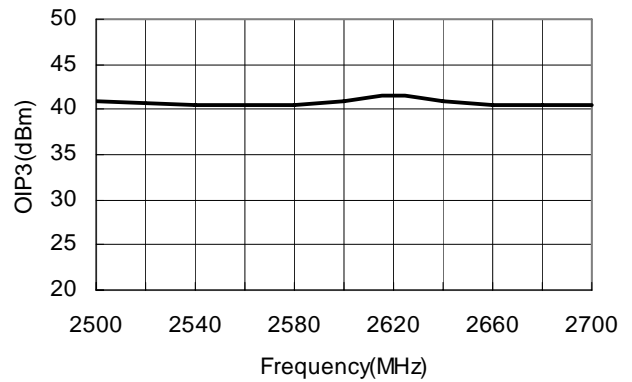



Noise Figure vs. Frequency

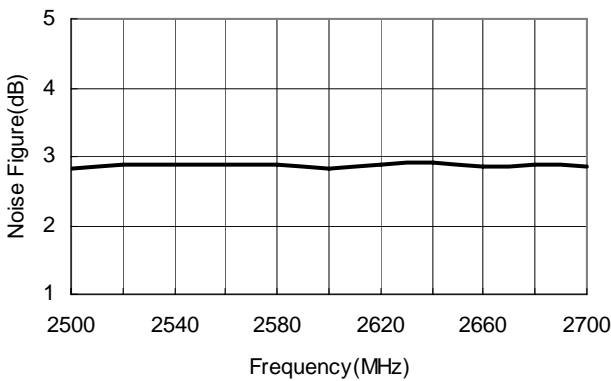


P1dB vs. Frequency

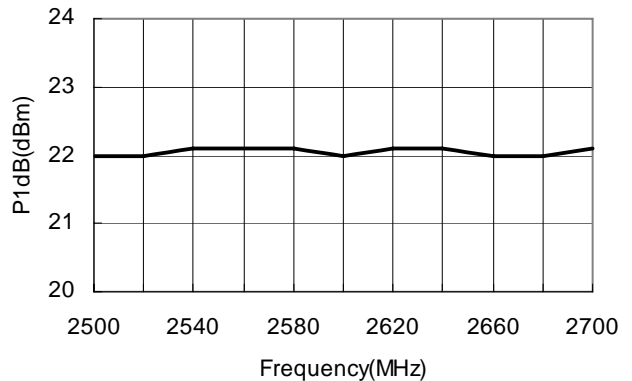

**Package Dimensions (Type: SOT-89)**

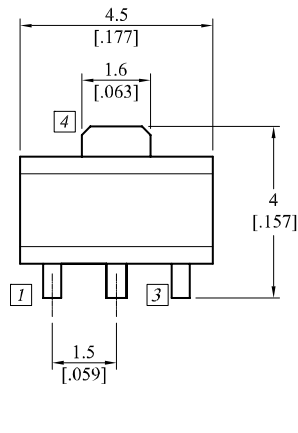


Unit : mm  
[inch]      Tolerance : ± 0.2  
    .008




Pin No	Function
1	Input
2	Ground
3	Output/Bias
4	Ground

**! ESD sensitive**  
Observe precautions for handling, testing and packaging.

**Recommended Pattern**

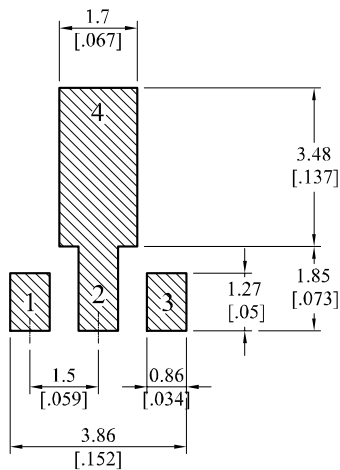

**Recommended Mounting Configuration**

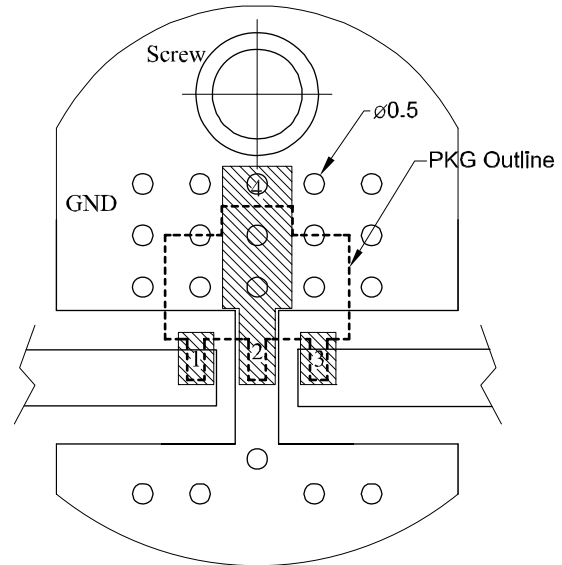

RFHIC Corporation (RFHIC) reserves the right to make changes to any products herein or to discontinue any product at any time without notice. RFHIC do not assume any liability for the suitability of its products for any particular purpose, and disclaims any and all liability, including without limitation consequential or incidental damages. The product specifications herein expressed have been carefully checked and are assumed to be reliable. However, RFHIC disclaims liability for inaccuracies and strongly recommends buyers to verify that the information they are using is current before placing purchase orders. RFHIC products are not intended for use in life support equipment or application where malfunction of the product can be expected to result in personal injury or death. Buyer uses or sells such products for any such unintended or unauthorized application, buyer shall indemnify, protect and hold RFHIC and its directors, officers, stockholders, employees, representatives and distributors harmless against any and all claims arising out of such use. RFHIC's liability under or arising out of damages, claims of whatsoever kind and nature which RFHIC products could cause shall be limited in amount to the net purchase price of the products sold to buyer by RFHIC.