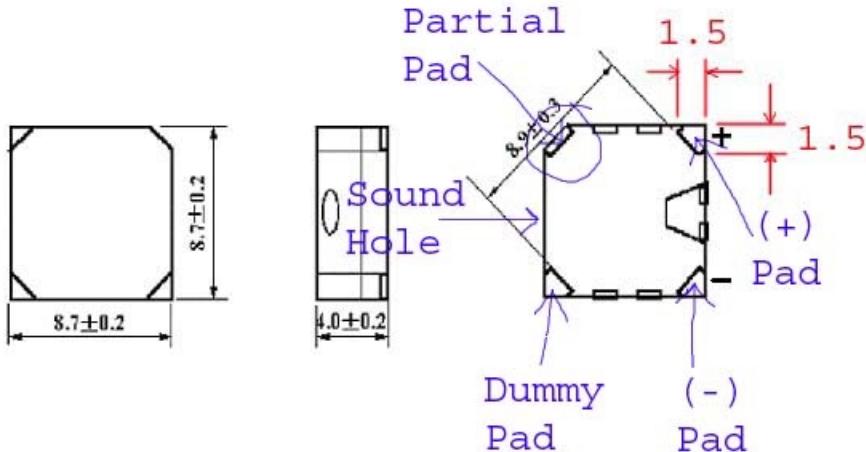


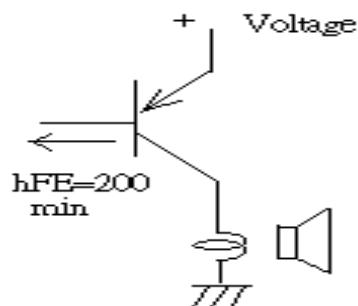
Specifications:

Oscillation Frequency (Hz)	2730
Operating Voltage (Vp-p/max)	2.0 ~ 4.0
Rated Voltage (Vp-p)	3.0
Current Consumption Max. (mA)	80 at Rated Voltage
Sound Pressure Level Min. (dB/min)	85 at 10cm at Rated Voltage
Coil Resistance (Ω)	15 \pm 2
Operating Temperature (°C)	-20 ~ +70
Storage Temperature (°C)	-30 ~ +80
Housing	LCP plastic resin (Color : Black)
Type of Connection	SMD
Condition by reflow soldering (°C)	245 \pm 5 / 1 min
Condition by hand soldering (°C)	350 \pm 20 / within 5 sec
Weight (g)	0.6
Options	For other options contact factory

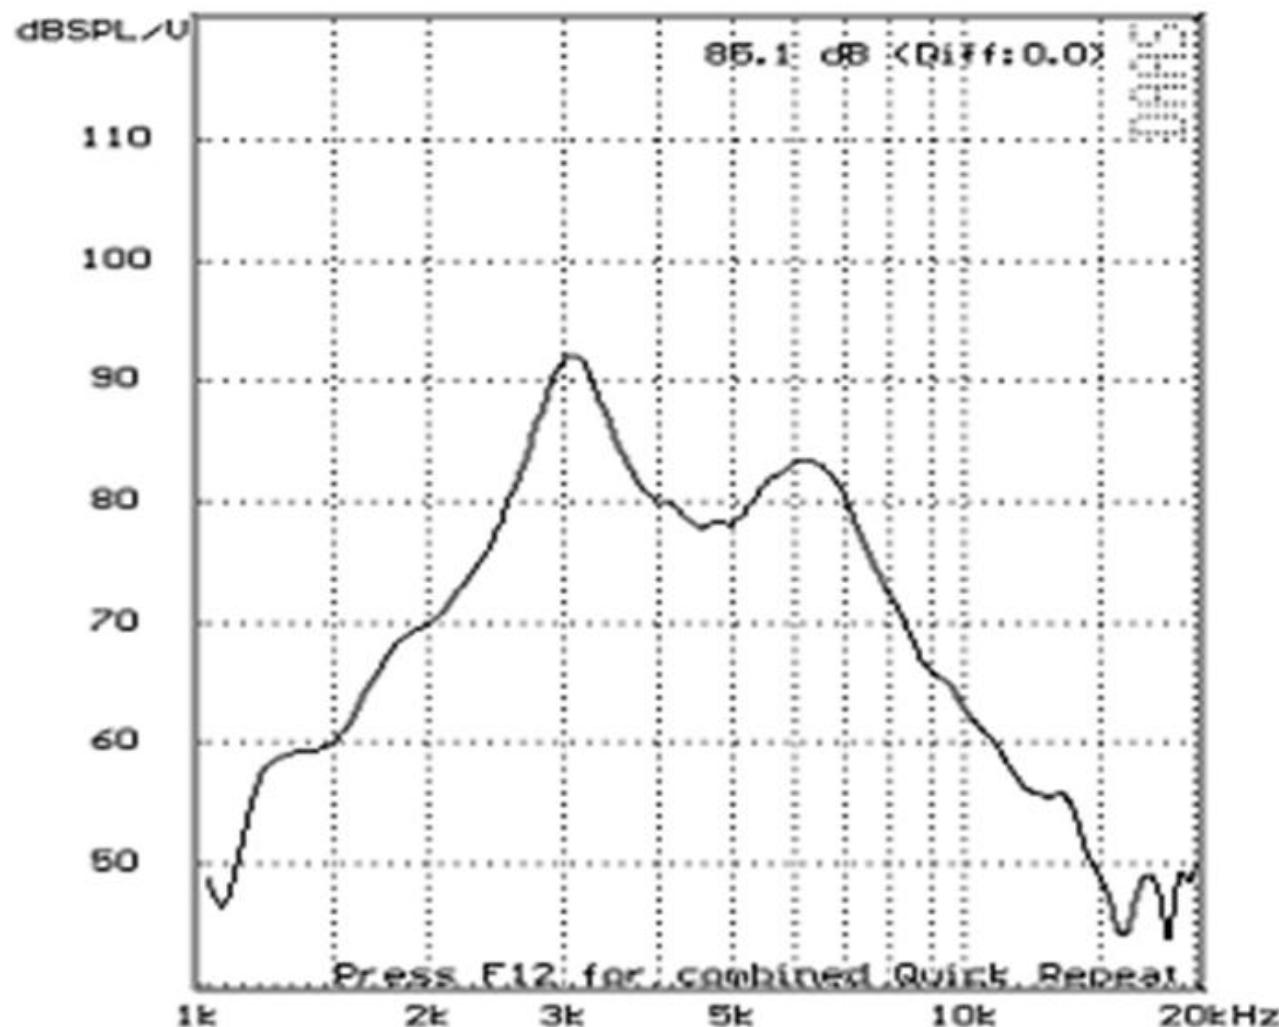
PS: Vp-p = 1/2duty, square wave

RoHS Compliant**Dimensions:** (units: mm)

* Dummy pad and Partial Pad are connected internally and are intended to only be used to help secure the part to the circuit board.

Recommend Driving Circuit:

* Units do not come with wash label and are not appropriate for aqueous wash.

Frequency Response:

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mallory Sonalert:](#)

[AST200Q](#)