


THIS DOCUMENT AND THE DATA DISCLOSED  
HEREIN OR HERewith IS NOT TO BE REPRODUCED,  
USED, OR DISCLOSED IN WHOLE OR IN PART  
TO ANYONE WITHOUT PERMISSION OF VICOR CORP.

LTR.	DESCRIPTION	DATE	APP'D.
01	RELEASED PER ECO #2321	JC 1/15/91	BVK

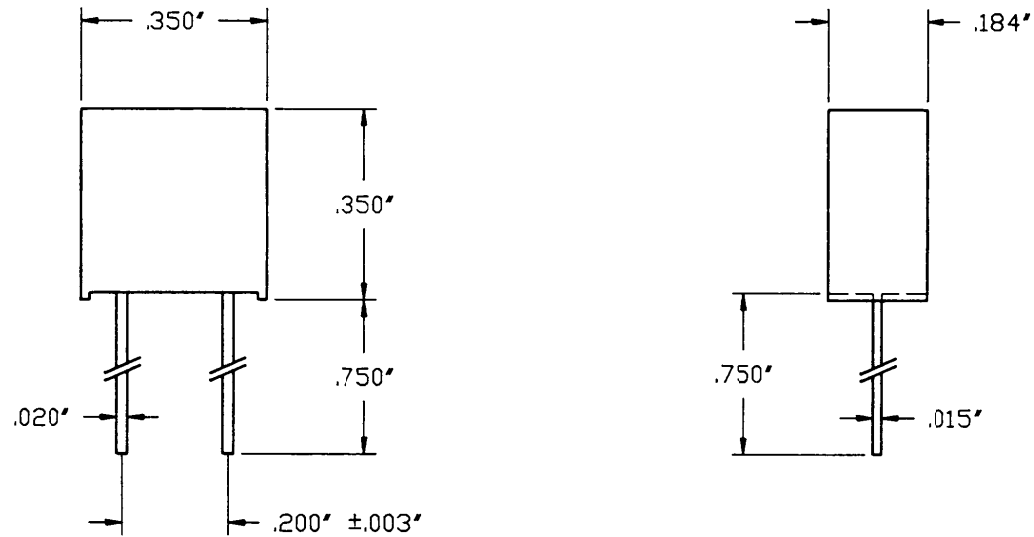

NOTES:

1. UL RECOGNIZED, FILE E19180,  
GUIDE JDYX2; CSA CERTIFIED  
FILE 42731, CLASS 1421-01.

ELECTRICAL SPECIFICATIONS

AMPERAGE	_____	3 AMPS
VOLTAGE	_____	250 VOLTS
INTERRUPTING & VOLTAGE RATINGS	_____	50 AMPS
TIME-CURRENT CHARACTERISTICS	_____	CARRY 100% FOR 4 HRS MIN. OPEN AT 200% IN 10 SEC. MAX.
COLD RESISTANCE DATA	_____	0.071 $\Omega$

**COPY**

VICOR ANDOVER, MA. U.S.A.

DRAWN:	7/90	FUSE 3 AMPS, 250 VOLTS	
CHECKED: <i>JC</i>	9/90		
APP'D:			
ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) DO NOT SCALE DRAWING	TOLERANCES (EXCEPT AS NOTED) .XX ± .01 .XXX ± .006 FRACT ± 1/64 ANGLES ± 1°	DRAWING NO.	REV.
	NEXT ASSY:	SCALE: 2:1	02178 01 SHEET 1 OF 1