
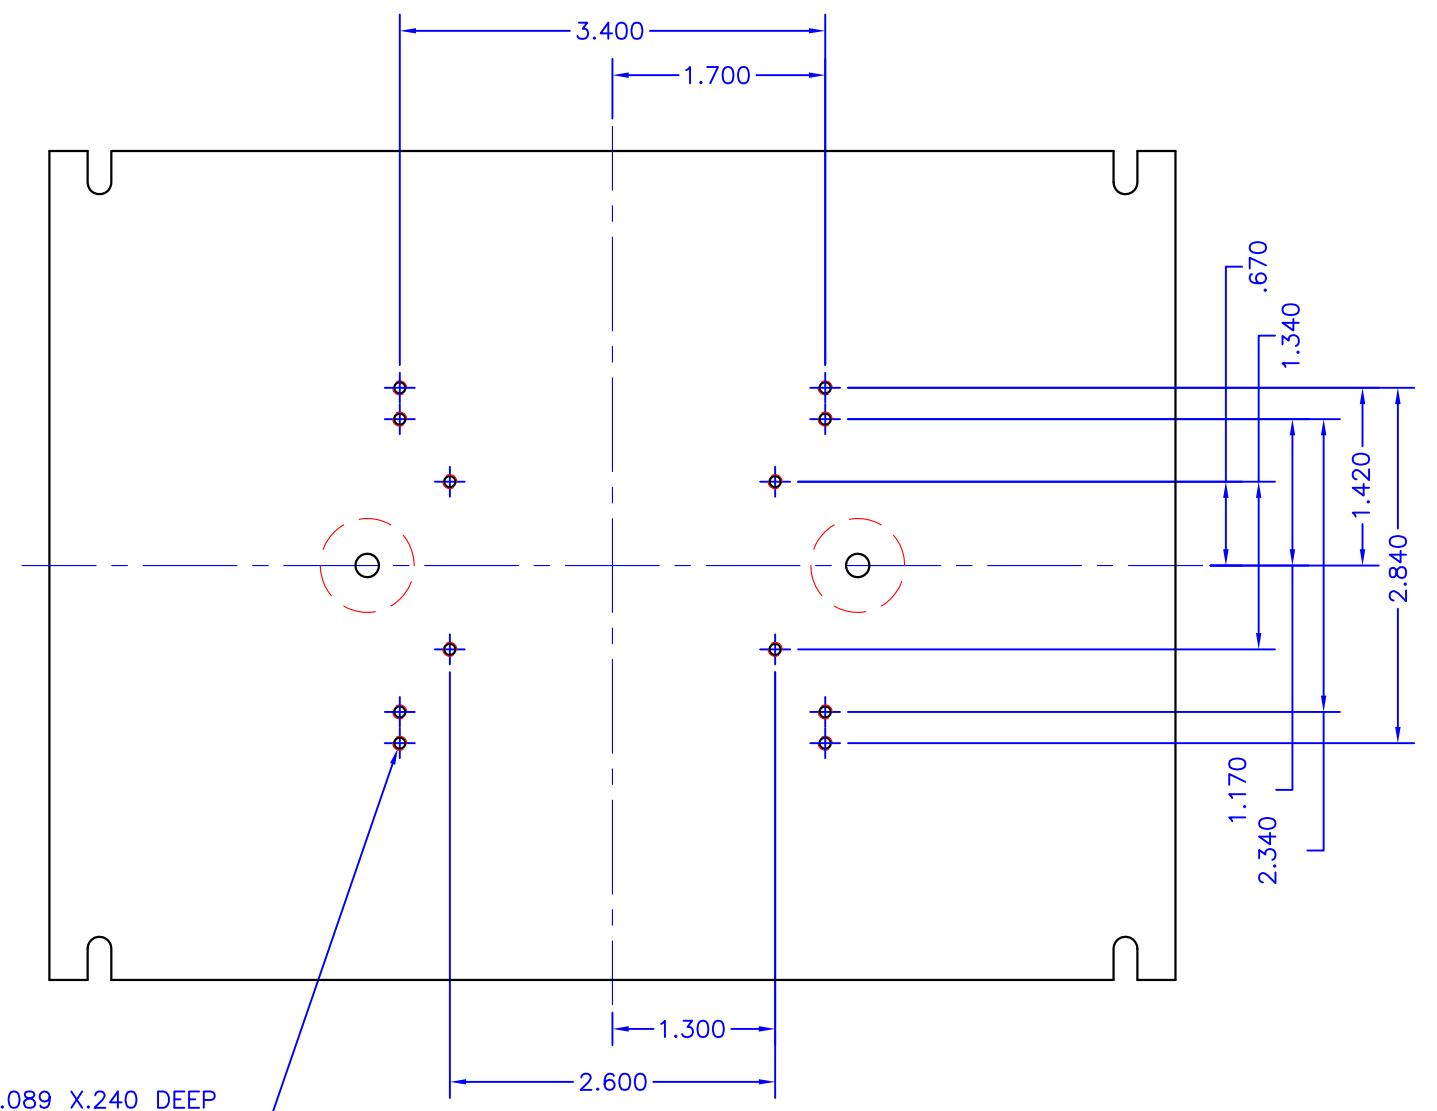
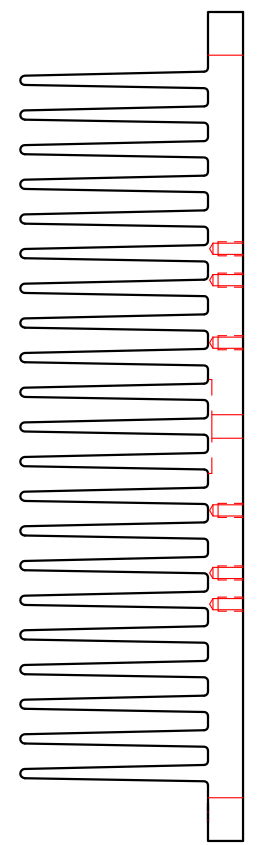


8 7 6 5 4 3 2 1

E
D
C
B
A



E
D
C
B
A

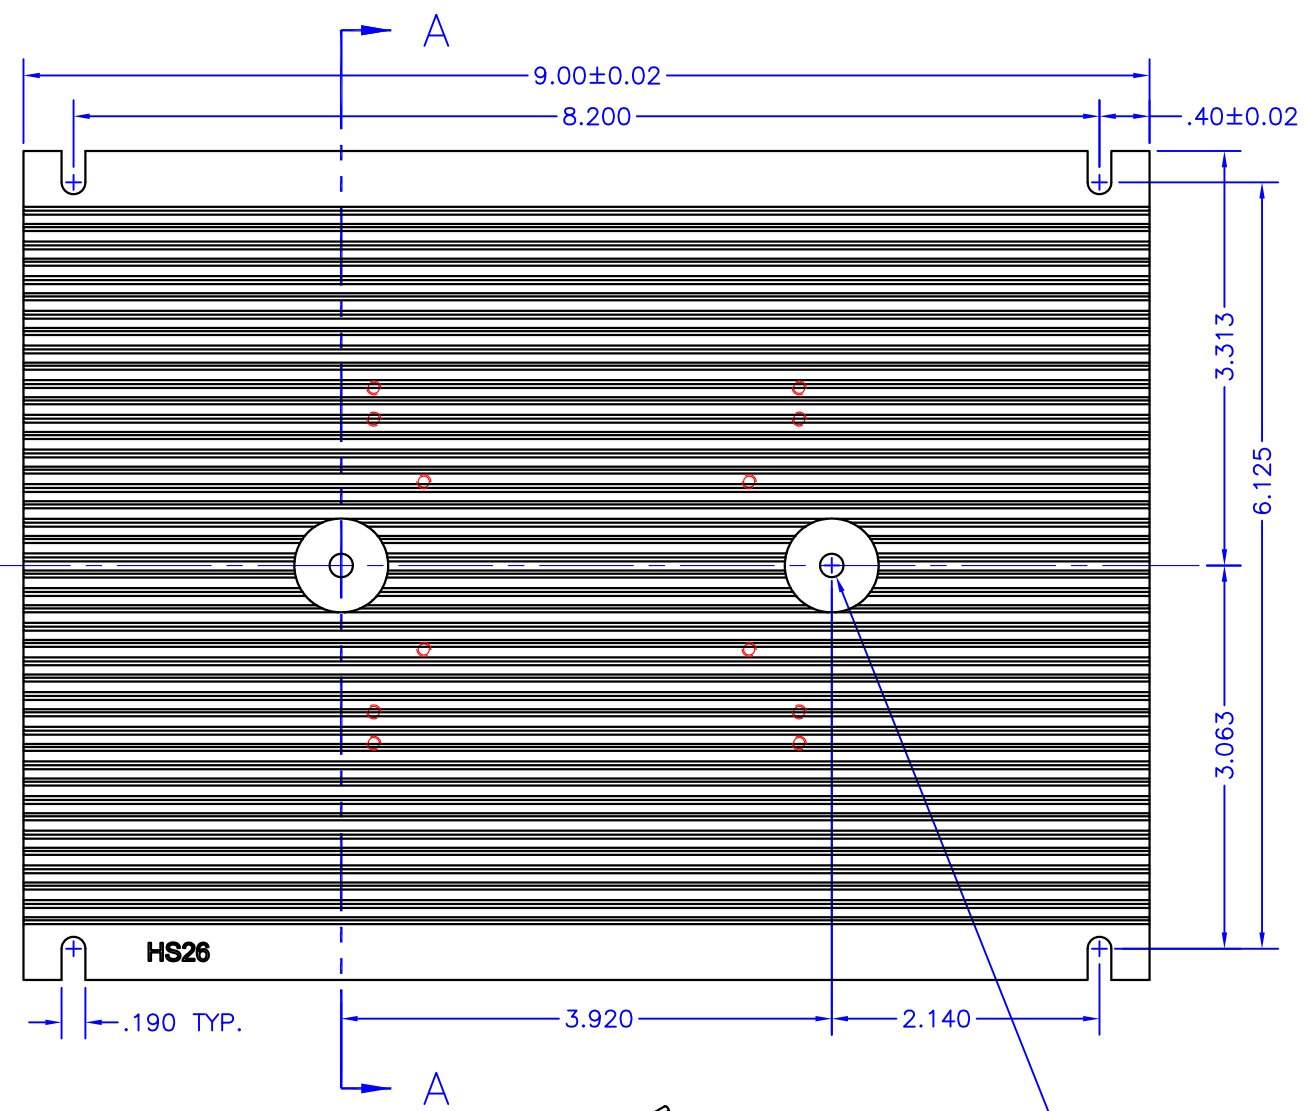

Ø.089 X.240 DEEP
TAP 4-40 X .20 DEEP
12 PLACES

Ø.187 THRU
C'BORE Ø.75
X 1.53 DEEP
2 PLACES

SECTION A-A

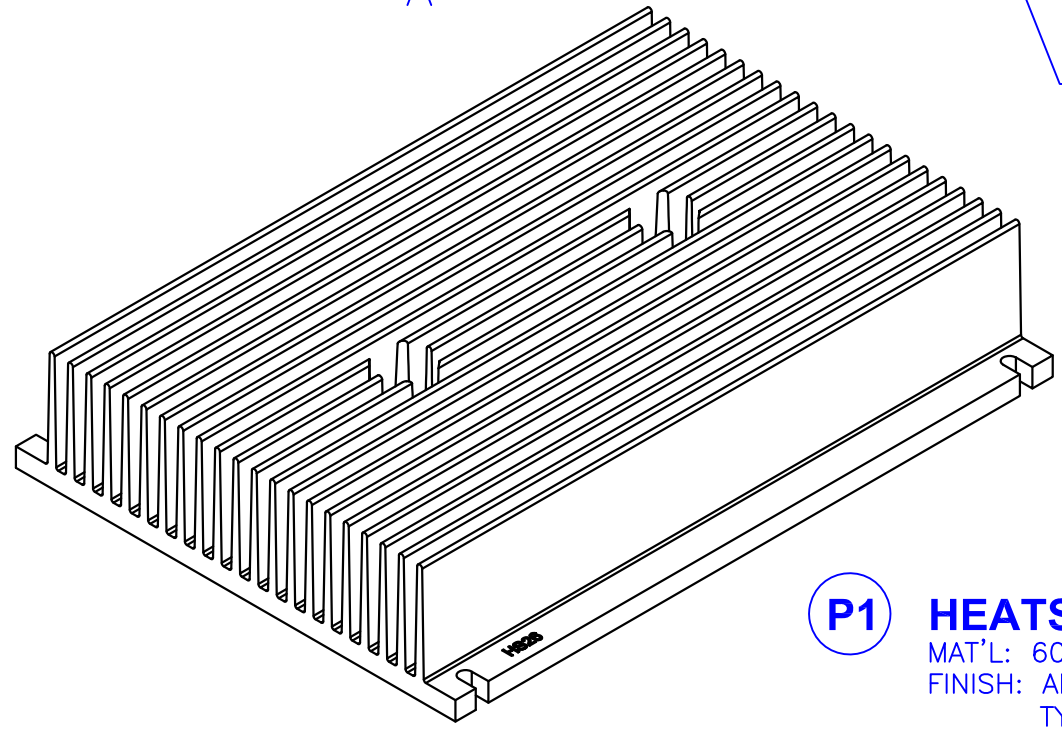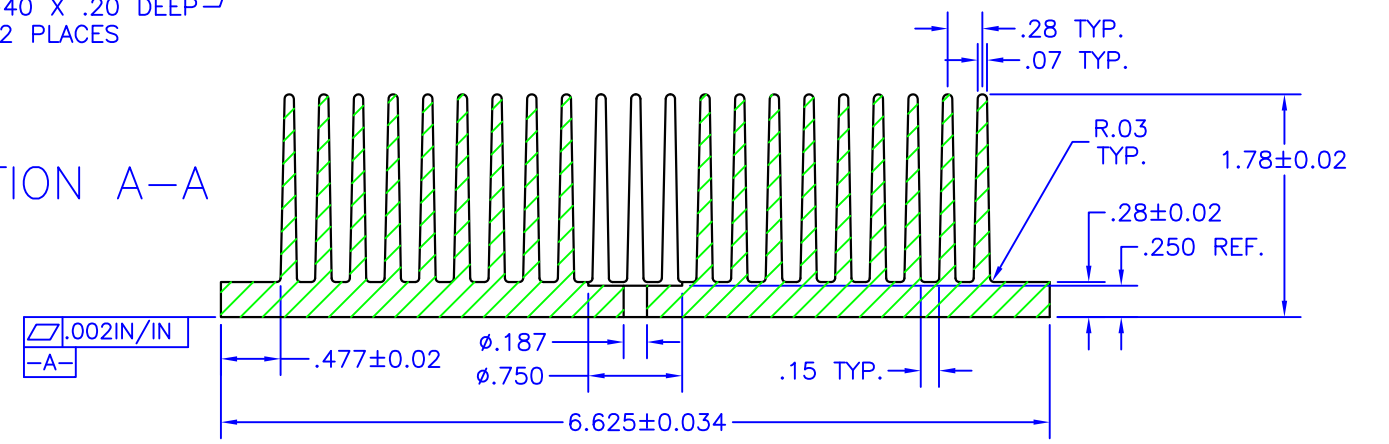

P1 HEATSINK
 MAT'L: 6063-T5 ALUMINUM (AAVID EXTRUSION #69800)
 FINISH: ANODIZE PER MIL-A-8625, TYPE II, CL 2, BLACK
 TYPICAL BREAKDOWN VOLTAGE > 300V

NOTES:

1. UNLESS OTHERWISE NOTED, ALL DIMENSIONS ARE IN INCHES.
2. BREAK ALL SHARP EDGES, DE-BURR & REMOVE LOOSE CHIPS.
3. MARK WITH CONTRASTING INK AS SHOWN, IF SPECIFIED BY PURCHASE ORDER.

TOLERANCES - UNLESS OTHERWISE SPECIFIED		TITLE: MODULAR PACKAGE HEATSINK		MODEL: HS26	
.XX = ±.05 [.002]		SUBJECT: MECHANICAL DRAWING		DATE: 14NOV12	
.XXX = ±.005 [.0002]		DRAWN BY: P.ECK		REV: C	
ANG. = ±2°		DCI: 12436		FILENAME: HS26	
APEX MICROTECHNOLOGY		SIC: 1 OF 1		REV: C	

8 7 6 5 4 3 2 1