

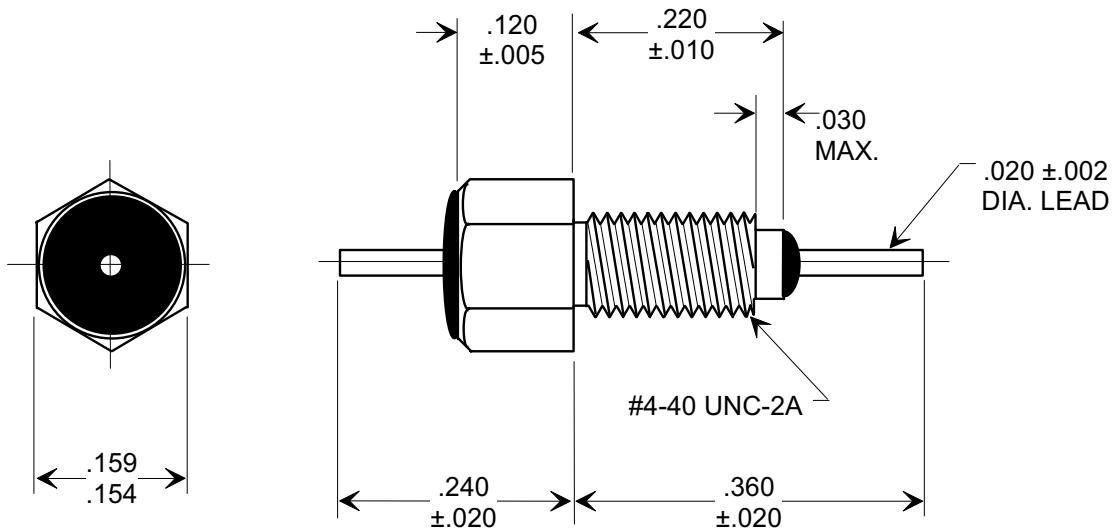


MARKETING SALES DRAWING
DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING

Electrical Testing per Tucsonix standard test plans and Mil-Std-202 Test Methods.



MOUNTING HARDWARE

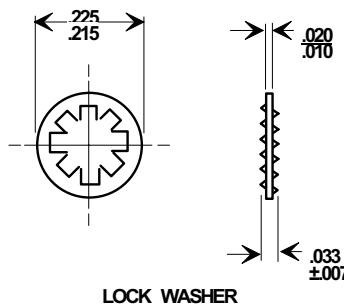

NOTES:

1. OPERATING TEMPERATURE RANGE: -55°C TO +125°C.
 2. SOLDER PLATED CASE, LEAD AND MOUNTING HARDWARE.
 3. MAX. RECOMMENDED MOUNTING TORQUE : 2.0 lb. - in.
 4. MAX. RECOMMENDED SOLDERING TEMPERATURE : 260°C.
SEE INSTALLATION RECOMMENDATIONS.
 5. LOCKWASHER INCLUDED.
 6. TUSONIX TRADEMARK AND PART VARIATION NUMBER
STAMPED ON HEX FLATS

STYLE	VAR.	CAP. (pF)	TOLERANCE	125° WORKING VOLTAGE		CURRENT D.C. (AMPS)	MINIMUM NO LOAD INSERTION LOSS (dB) AT 25°C PER MIL-STD-220				
				85° C	125° C		1MHz	10MHz	100MHz	1GHz	10 GHz
4400	073	27,000	GMV	70	50	10A	10	28	45	65	70

REVISION RECORD				
Original Release C.O.	960507-2	0		
			--TOLERANCES-- Unless Otherwise Specified	Title BUSHING STYLE EMI FILTER
DECIMAL \pm 				
ANGLES \pm 			Drawn S.M. 05-07-96	Scale 5X
			Approved T.C. 05-07-96	
 TUCSON, ARIZONA			A	4400-073