

# Hi-Q® High RF Power MLC Surface Mount Capacitors

For 600V to 7200V Applications



## PRODUCT OFFERING

Hi-Q®, high RF power, surface mount MLC capacitors from AVX Corporation are characterized with ultra-low ESR and dissipation factor at high frequencies. They are designed to handle high power and high voltage levels for applications in RF power amplifiers, inductive heating, high magnetic field environments (MRI coils), medical and industrial electronics.



## HOW TO ORDER

HQCC	A	A	271	J	A	T	1A
<b>AVX Style</b>	<b>Voltage</b>	<b>Temperature Coefficient</b>	<b>Capacitance Code</b> (2 significant digits + no. of zeros) Examples: 4.7 pF = 4R7 10 pF = 100 100 pF = 101 1,000 pF = 102	<b>Capacitance Tolerance</b> B = 0.1pF (<8.2pF) C = ±0.25pF (<8.2pF) D = ±0.50pF (<8.2pF) F = ±1% (≥10pF) G = ±2% J = ±5% K = ±10% M = ±20%	<b>Test Level</b> A = Standard	<b>Termination*</b> T = Plated Ni and Sn (RoHS Compliant) J = 5% Min Pb 7 = Plated Ni and Au A = Axial Ribbon M = Microstrip H = Cu/Sn (Non-Magnetic)	<b>Packaging</b> 1A = 7" Reel* 6A = Waffle Pack  *HQCC & HQCE only

**\*\*RoHS compliant**

## DIMENSIONS

millimeters (inches)

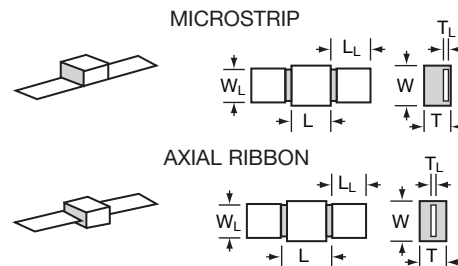

STYLE	HQCC	HQCE
(L) Length	5.84 +0.51 -0.25 (0.230 +0.020 -0.010)	9.65 +0.38 -0.25 (0.380 +0.015 -0.010)
(W) Width	6.35 ± 0.38 (0.250 ± 0.015)	9.65 ± 0.25 (0.380 ± 0.010)
(T) Thickness Max.	3.68 (0.145) max. for capacitance values ≤ 680pF 4.19 (0.165) max. for capacitance values > 680pF	4.32 (0.170) max.
(Y) Overlap	1.20 ± (0.040) max.	1.02 ± (0.040) max.

STYLE	HQLC	HQLE
(L) Length	6.22 ± 0.64 (0.245 ± 0.025)	9.65 +0.89 -0.25 (0.380 +0.035 -0.010)
(W) Width	6.35 ± 0.38 (0.250 ± 0.015)	9.65 ± 0.25 (0.380 ± 0.010)
(T) Thickness Max.	3.68 (0.145) max. for capacitance values ≤ 680pF 4.19 (0.165) max. for capacitance values > 680pF	4.32 (0.170) max.
(Y) Overlap	N/A	N/A
(L <sub>L</sub> ) Lead Length	12.7 min. (0.500)	19.05 (0.750)
(W <sub>L</sub> ) Lead Width	6.10 ± 0.127 (0.240 ± 0.005)	8.89 ± 0.25 (0.350 ± 0.010)
(T <sub>L</sub> ) Lead Thickness	0.102 ± 0.025 (0.004 ± 0.001)	0.25 ± 0.13 (0.010 ± 0.005)
Lead Material	High Purity Silver Leads Leads are attached with High Temperature Solder	High Purity Silver Leads Leads are attached with High Temperature Solder

**Not RoHS Compliant**



For RoHS compliant products,  
please select correct termination style.

7

# Hi-Q<sup>®</sup> High RF Power MLC Surface Mount Capacitors

For 600V to 7200V Applications



## DIELECTRIC PERFORMANCE CHARACTERISTICS

<b>Capacitance Range</b>	1.0pF to 2,700pF (25°C, 1.0 ±0.2 Vrms at 1kHz, for ≤ 1000 pF use 1MHz)
<b>Capacitance Tolerances</b>	±0.10pF, ±0.25pF, ±0.50pF, ±1%, ±2%, ±5%, ±10%, ±20%
<b>Dissipation Factor 25°C</b>	0.1% Max (+25°C, 1.0 ±0.2 Vrms at 1kHz, for ≤ 1000 pF use 1MHz)
<b>Operating Temperature Range</b>	-55°C to +125°C
<b>Temperature Characteristic</b>	C0G: 0 ± 30 ppm/°C (-55°C to +125°C), P90: 90 ± 30 ppm/°C (-55°C to +125°C)
<b>Insulation Resistance</b>	100K MΩ min. @ +25°C and 500VDC 10K MΩ min. @ +125°C and 500VDC
<b>Dielectric Strength</b>	250% of WVDC for capacitors rated at 500 volts DC or less for 5 seconds. 150% of WVDC for capacitors rated at 1250 volts DC or less for 5 seconds. 120% of WVDC for capacitors rated above 1250 volts DC or less for 5 seconds.

## HQCC CAPACITANCE VALUES (A DIELECTRIC)

Cap Code	Cap (pF)	Tol.	Rated WVDC	Cap Code	Cap (pF)	Tol.	Rated WVDC	Cap Code	Cap (pF)	Tol.	Rated WVDC	Cap Code	Cap (pF)	Tol.	Rated WVDC														
1R0	1.0	B, C, D	2500	8R2	8.2	B, C, D	2500	680	68	F, G, J K, M	2500	471	470	F, G, J K, M	1500														
1R2	1.2			100	10	820		82	561			560	1000																
1R5	1.5			120	12	101		100	681			680																	
1R8	1.8			150	15	121		120	821			820																	
2R2	2.2			B, C, D	2500	180		18	F, G, J K, M			2500	151		150	F, G, J K, M	2500	102	1000	F, G, J K, M	500								
2R7	2.7					220		22					181		180			122	1200										
3R3	3.3					270		27					221		220			152	1500										
3R9	3.9					B, C, D		2500					330		33			F, G, J K, M	2500		271	270	F, G, J K, M	2500	182	1800	F, G, J K, M	300	
4R7	4.7												390		39						331	330			222	2200			
5R6	5.6	470	47				391			390	272		2700																
6R8	6.8	B, C, D	2500				560			56	F, G, J K, M		2500																

## HQCC CAPACITANCE VALUES (M DIELECTRIC)

Cap Code	Cap (pF)	Tol.	Rated WVDC	Cap Code	Cap (pF)	Tol.	Rated WVDC	Cap Code	Cap (pF)	Tol.	Rated WVDC	Cap Code	Cap (pF)	Tol.	Rated WVDC																		
1R0	1.0	B, C, D	2500	5R1	5.1	B, C, D	2500	390	39	F, G, J K, M	2500	301	300	F, G, J K, M	1500																		
1R1	1.1			5R6	5.6			430	43			331	330																				
1R2	1.2			6R2	6.2			470	47			361	360																				
1R3	1.3			6R8	6.8			510	51			391	390																				
1R4	1.4			7R5	7.5			560	56			431	430																				
1R5	1.5			8R2	8.2			620	62			471	470																				
1R6	1.6			9R1	9.1			680	68			511	510																				
1R7	1.7			100	10			750	75			561	560																				
1R8	1.8			110	11			820	82			621	260																				
1R9	1.9	B, C, D	2500	120	12	F, G, J K, M	2500	681	680	F, G, J K, M	2500	751	750	F, G, J K, M	1000																		
2R0	2.0			130	13			910	91			821	820																				
2R1	2.1			150	15			101	100			911	910																				
2R2	2.2			B, C, D	2500			160	16			F, G, J K, M	2500		102	1000	F, G, J K, M	2500	112	1100	F, G, J K, M	500											
2R4	2.4							180	18						161	160			122	1200													
2R5	2.7							200	20						181	180			152	1500													
3R0	3.0							B, C, D	2500						220	22			F, G, J K, M	2500		201	200	F, G, J K, M	2500	182	1800	F, G, J K, M	300				
3R3	3.3														240	24						221	220			222	2200						
3R6	3.6														270	27						241	240			242	2400						
3R9	3.9	B, C, D	2500			300	30			F, G, J K, M	2500			271	270	F, G, J K, M						2500	272			2700	F, G, J K, M		300				
4R3	4.3					330	33																										
4R7	4.7					360	36																										



# Hi-Q<sup>®</sup> High RF Power MLC Surface Mount Capacitors

For 600V to 7200V Applications



## HQCE CAPACITANCE VALUES (A DIELECTRIC)

Cap Code	Cap (pF)	Tol.	Rated WVDC		Cap Code	Cap (pF)	Tol.	Rated WVDC		Cap Code	Cap (pF)	Tol.	Rated WVDC	
			Standard	Extended				Standard	Extended				Standard	Extended
1R0	1.0	C, D	3600	7200	150	15	G, J, K, M	3600	7200	221	220	G, J, K, M	3600	NA
1R2	1.2				271	270								
1R5	1.5				331	330								
1R8	1.8				391	390								
2R2	2.2				471	470								
2R7	2.7				561	560								
3R3	3.3				681	680								
3R9	3.9				821	820								
4R7	4.7				102	1000								
5R6	5.6				122	1200								
6R8	6.8	152	1500											
8R2	8.2	182	1800											
100	10	G, J, K, M			121	120			5000	222	2200			
120	12				151	150								
					181	180								

## HQCE CAPACITANCE VALUES (M DIELECTRIC)





Cap Code	Cap (pF)	Tol.	Rated WVDC		Cap Code	Cap (pF)	Tol.	Rated WVDC		Cap Code	Cap (pF)	Tol.	Rated WVDC	
			Standard	Extended				Standard	Extended				Standard	Extended
1R0	1.0	B, C, D	3600	7200	180	18	F, G, J, K, M	3600	7200	331	330	F, G, J, K, M	3600	NA
1R2	1.2				391	390								
1R5	1.5				471	470								
1R8	1.8				561	560								
2R2	2.2				681	680								
2R7	2.7				821	820								
3R3	3.3				102	1000								
3R9	3.9				122	1200								
4R7	4.7				152	1500								
5R6	5.6				182	1800								
6R8	6.8	222	2200											
8R2	8.2	272	2700											
100	10	F, G, J, K, M			121	120			5000	332	3300		500	
120	12				151	150								
					181	180								
150	15				221	220								
		271	270											

# Hi-Q<sup>®</sup> High RF Power MLC Surface Mount Capacitors



For 600V to 7200V Applications



## HQCC PERFORMANCE CHARACTERISTICS (A DIELECTRIC)

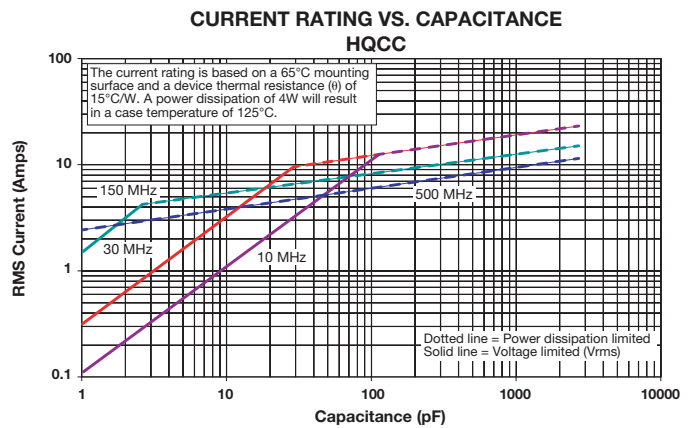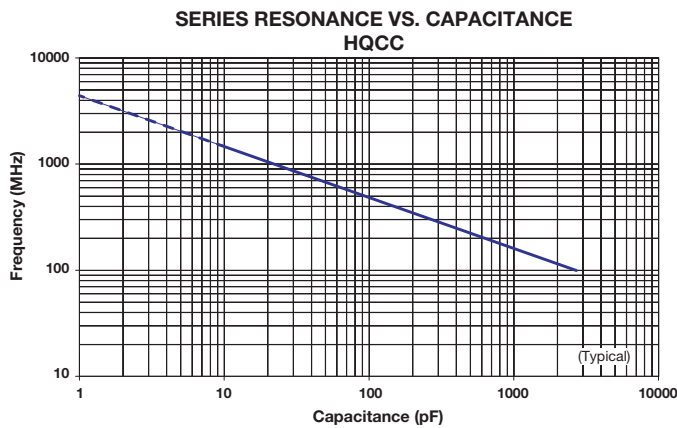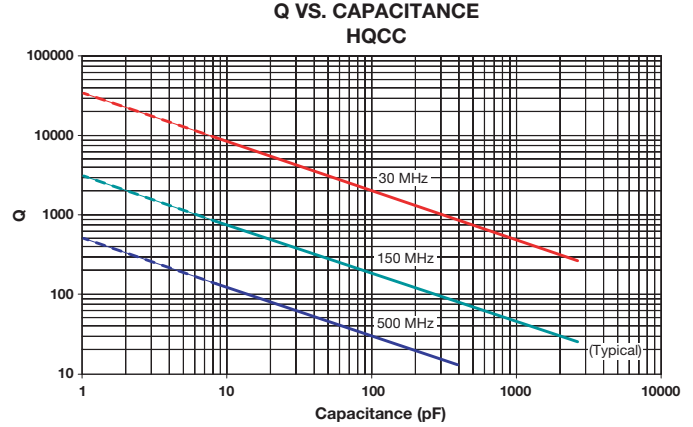
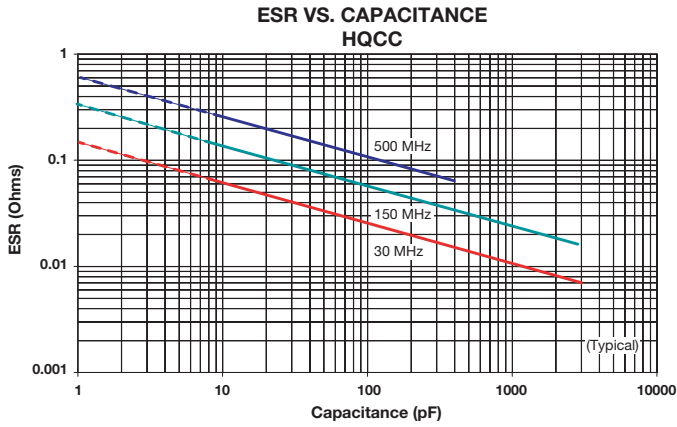


## HQCC PERFORMANCE CHARACTERISTICS (M DIELECTRIC)



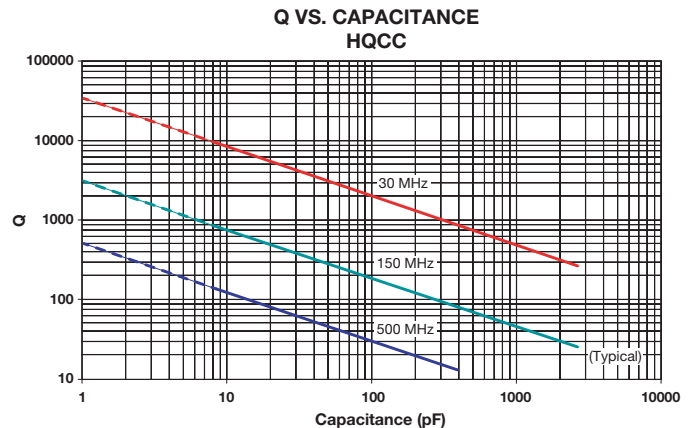
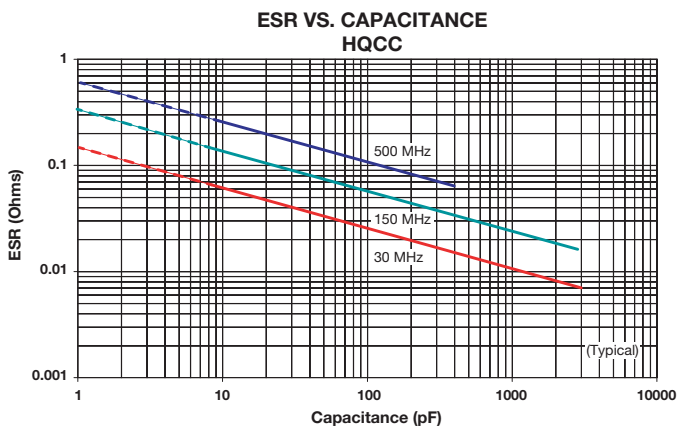


7

# Hi-Q<sup>®</sup> High RF Power MLC Surface Mount Capacitors For 600V to 7200V Applications

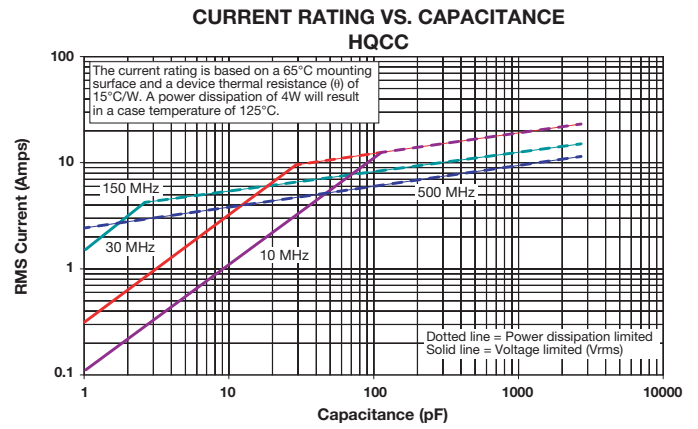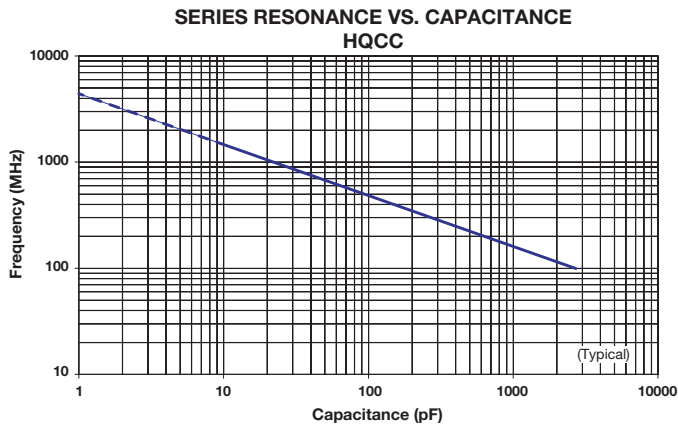

## HQCE PERFORMANCE CHARACTERISTICS (A DIELECTRIC)

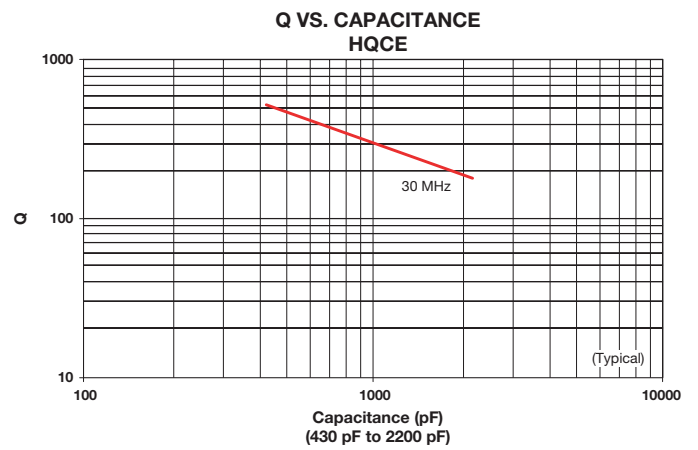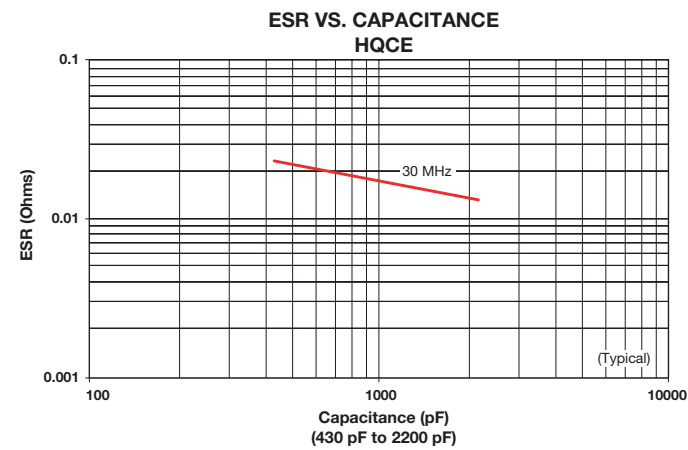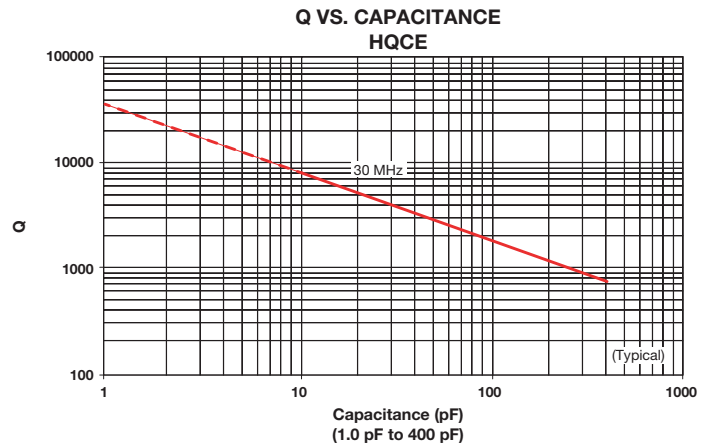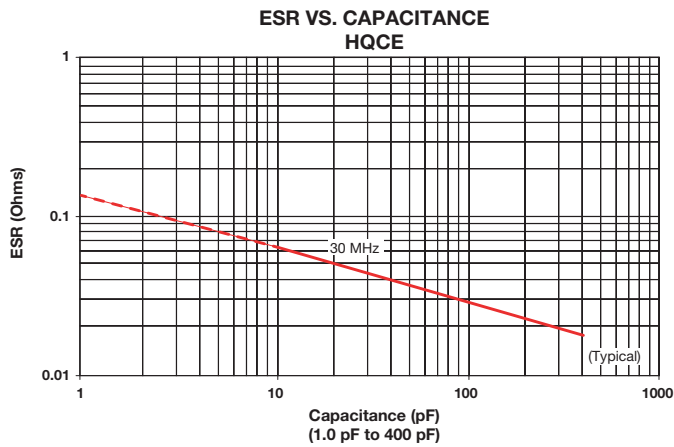


7




# Hi-Q<sup>®</sup> High RF Power MLC Surface Mount Capacitors For 600V to 7200V Applications




**CAPACITANCE CHANGE VS. TEMPERATURE  
HQCC**

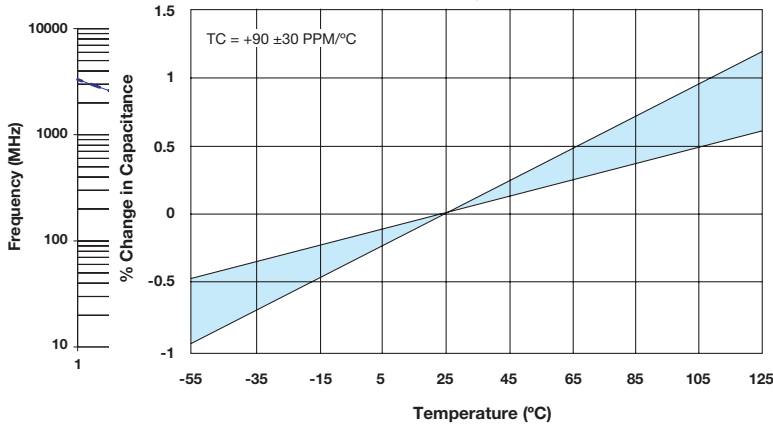


**CURRENT RATING VS. CAPACITANCE  
HQCE**

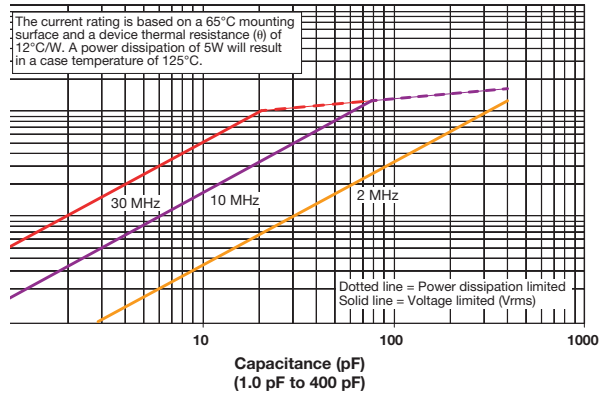

**CURRENT RATING VS. CAPACITANCE  
HQCE**

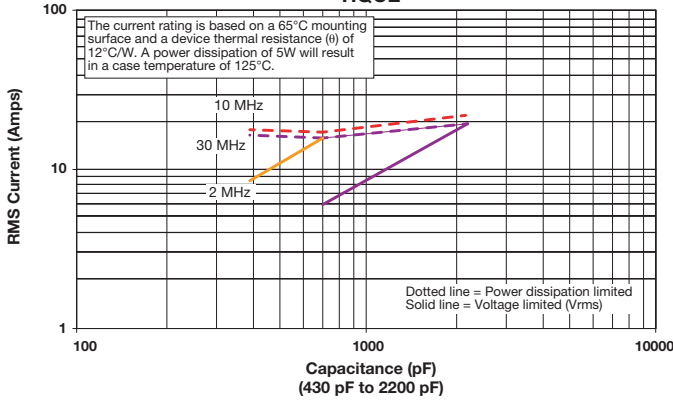


**CURRENT RATING VS. CAPACITANCE  
HQCE**

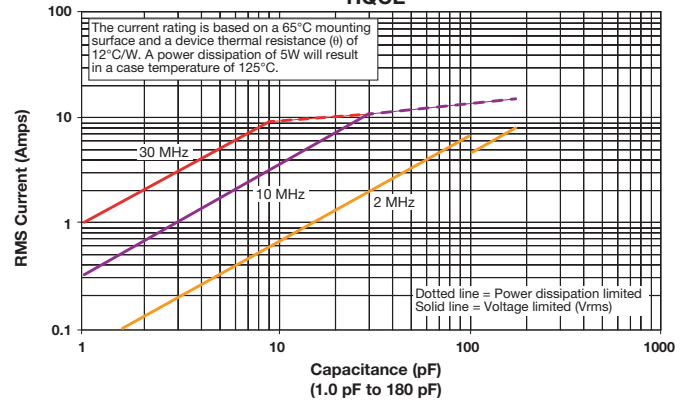


## HQCE PERFORMANCE CHARACTERISTICS (M DIELECTRIC)

**ESR VS CAPACITANCE  
HQCE M Dielectric**

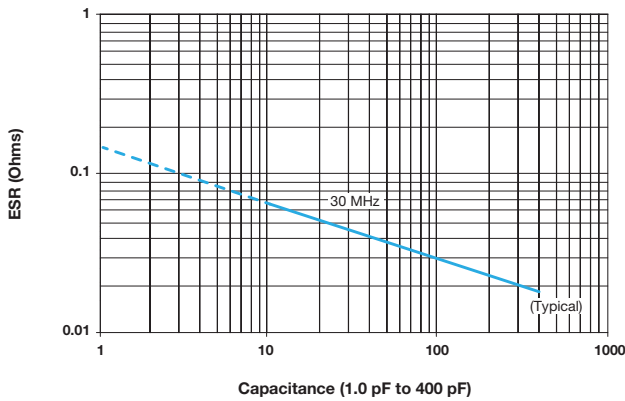


**Q VS CAPACITANCE  
HQCE M Dielectric**

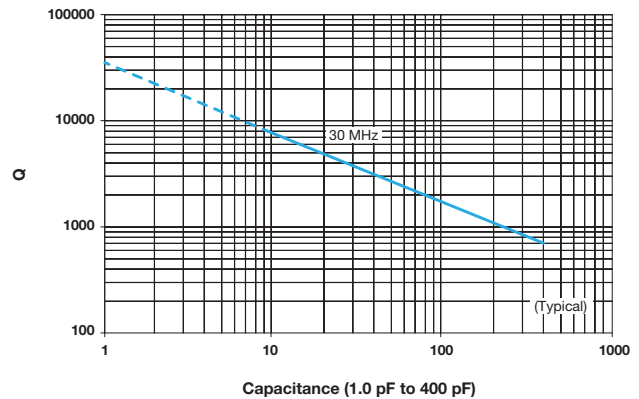


# Hi-Q<sup>®</sup> High RF Power MLC Surface Mount Capacitors For 600V to 7200V Applications




**ESR VS CAPACITANCE**  
HQCE M Dielectric

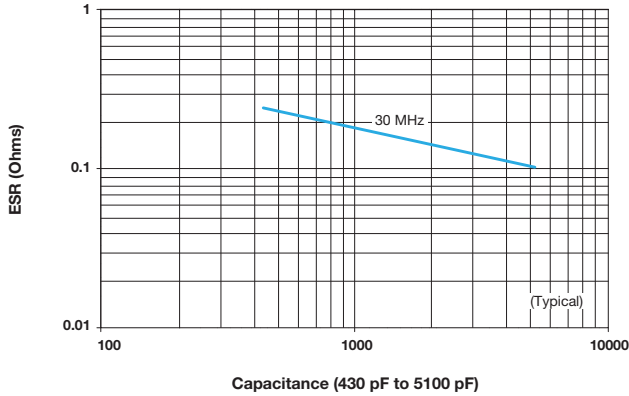


**Q VS CAPACITANCE**  
HQCE M Dielectric

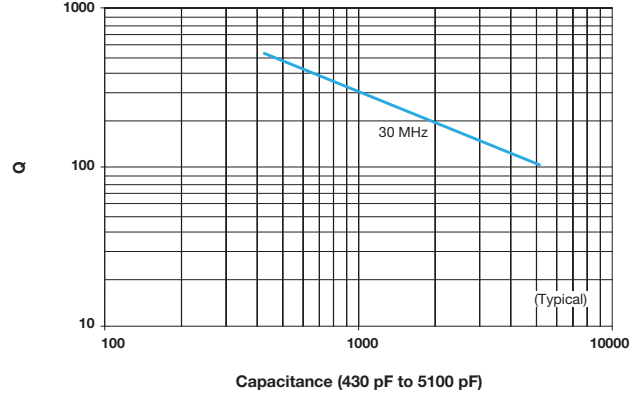


**SERIES RESONANCE VS CAPACITANCE**  
HQCE M Dielectric

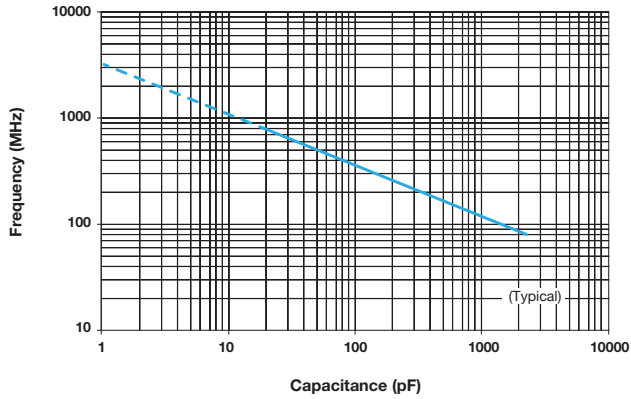

**CURRENT RATING VS CAPACITANCE**  
HQCE M Dielectric

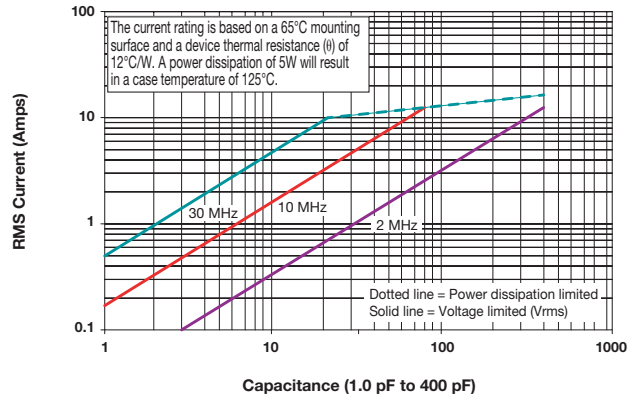

**CURRENT RATING VS CAPACITANCE**  
HQCE M Dielectric

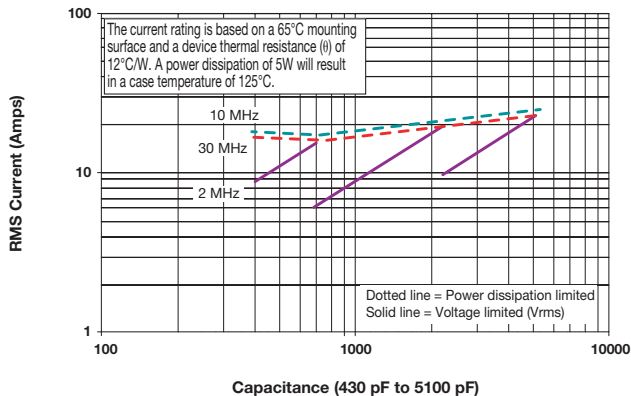

7

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## AVX:

[HQCEMA680FAT9A](#) [HQCEMA680FAT3A](#) [HQCEKA151JAT9A](#) [HQLCHA6R8CAM](#) [HQLCGA471GAM](#)  
[HQCCHA3R3DAT9A](#) [HQLCSA102GAM](#) [HQCEMA470JAT9A](#) [HQLEKA111JAM](#) [HQLEAA332GAM](#)  
[HQCEMA101JAT3A](#) [HQLEMA270JAM](#) [HQLCHA220DAM](#) [HQCEMA750FAT3A](#) [HQCEMA430FAT3A](#)  
[HQCEMA270FAT3A](#) [HQLCCA222GAM](#) [HQLEAA392GAM](#) [HQLCHA150DAM](#) [HQLEMA101KAA](#) [HQCCHA200GA19A](#)  
[HQCCHA180GA11A](#) [HQCCHA820KA11A](#) [HQCCHA131GA11A](#) [HQCCHA200GA11A](#) [HQCCHA330GAT9A](#)  
[HQCCHA101GA11A](#) [HQCCHA120GAT9A](#) [HQCCHA121GAT9A](#) [HQCCHA150GA11A](#) [HQCCHA151JA19A](#)  
[HQCCHA220GAT1A](#) [HQCCHA220GAT9A](#) [HQCCHA221GAT9A](#) [HQCCHA271GAT9A](#) [HQCCHA330GA11A](#)  
[HQCCHA390GAT9A](#) [HQCCHA4R7CA19A](#) [HQCCHA560GAT9A](#) [HQCCHA680GAT9A](#) [HQCCHA6R8CAT1A](#)  
[HQCCSA102KAT1A](#) [HQCCSA821GAT9A](#) [HQCCWA331GAT9A](#) [HQCCWA391GAT9A](#) [HQCECA682KAT3A](#)  
[HQCEGA122JAT9A](#) [HQCEGA182KAT3A](#) [HQCEGA182KAT9A](#) [HQCEHA561JAT9A](#) [HQCEHA681JA19A](#)  
[HQCEHA681JAT9A](#) [HQCEJA221JAT9A](#) [HQCEJA391JAT9A](#) [HQCEWA821JAT9A](#) [HQLCHA470KAM](#)  
[HQLCHA560KAM](#) [HQLCHA820KAM](#) [HQCCSA122FAT1A](#) [HQCEMA180JAT6A](#) [HQCEMA101JAT6A](#)  
[HQCEMA220JAT9A](#) [HQCEMA270JAT9A](#) [HQCEMA330JAT9A](#) [HQLEGA122GAM](#) [HQLEHA511GAM](#)  
[HQCC7M152GAH6A](#) [HQCC7M182GAH6A](#) [HQCC9M222GAH6A](#) [HQCC9M272GAH6A](#) [HQCCAM102GAH6A](#)  
[HQCCAM122GAH6A](#) [HQCCAM561GAH6A](#) [HQCCAM681GAH6A](#) [HQCCAM821GAH6A](#) [HQCCSM361GAH6A](#)  
[HQCCSM471GAH6A](#) [HQCCWM100GAH6A](#) [HQCCWM101GAH6A](#) [HQCCWM120GAH6A](#) [HQCCWM121GAH6A](#)  
[HQCCWM150GAH6A](#) [HQCCWM151GAH6A](#) [HQCCWM180GAH6A](#) [HQCCWM181GAH6A](#) [HQCCWM200GAH6A](#)  
[HQCCWM221GAH6A](#) [HQCCWM240GAH6A](#) [HQCCWM271GAH6A](#) [HQCCWM2R0BAH6A](#) [HQCCWM2R4BAH6A](#)  
[HQCCWM300GAH6A](#) [HQCCWM330GAH6A](#) [HQCCWM3R3BAH6A](#) [HQCCWM3R9BAH6A](#) [HQCCWM430GAH6A](#)  
[HQCCWM470GAH6A](#) [HQCCWM4R7BAH6A](#) [HQCCWM510GAH6A](#) [HQCCWM560GAH6A](#)