



THIS DOCUMENT AND THE DATA DISCLOSED  
HEREIN OR HERewith IS NOT TO BE REPRODUCED,  
USED, OR DISCLOSED IN WHOLE OR IN PART  
TO ANYONE WITHOUT PERMISSION OF VICOR CORP.

LTR.	DESCRIPTION	DATE	APP'D.
1	RELEASED PER ECO #2210		

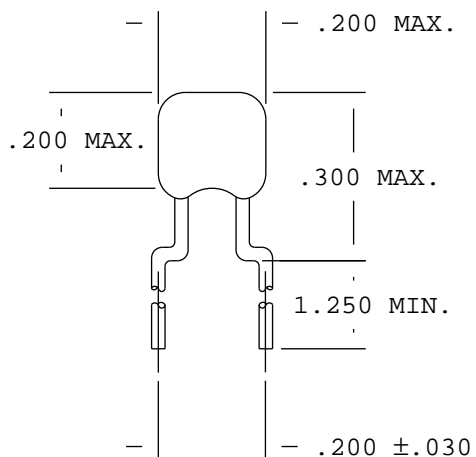

### ELECTRICAL SPECIFICATIONS

CAPACITANCE	470pF ±10%
VOLTAGE	500V
DIELECTRIC STRENGTH	250% OF VOLTAGE FOR 5 SECONDS WITH 50mA MAX CHARGING CURRENT
CAPACITANCE TEST	1 VRMS MAX @ 1KHZ
DISSIPATION FACTOR	2.5% MAX @ 1KHZ, 1 VRMS MAX
INSULATION RESISTANCE	1000 MEGOHMS-uF

**VICOR** ANDOVER, MA. U.S.A.

**CAPACITOR, X7R**  
**470pF ± 10%, 500V**

DRAWN:	5/90	TOLERANCES (EXCEPT AS NOTED) .XX ± .01 .XXX ± .005 FRACT ± 1/64 ANGLES ± 1 SCALE:4:1	DRAWING NO. <b>04820</b>	REV. <b>1</b>
CHECKED:				
APPD:				
ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) DO NOT SCALE DRAWING				
NEXT ASSY:			SHEET 1 OF 1	