



Ha-VIS RFID Box

Advantages

- Completely installed RFID system in a box
- Tested and ready to connect
- Highly modular
- Customer specific configurations
- Robust Metal housing

General Description

The Ha-VIS RFID Box offers system integrators and customers a complete RFID System „out of the Box.“ The box is made from VA steel. All components are pre-installed and tested. The box is ready for installation. You only have to connect power, Ethernet and antenna.

Properties:

- 2 mm VA steel box
- Locked with key
- Up to IP 65

Identification

Part number


Drawing

Dimensions in mm

Ha-VIS RFID Box



equipped with:
Ha-VIS RF-R500-p-EU
Ha-VIS eCon 2050-A
Ha-VIS pCon 2120-24

20 91 421 1001



other configuration

on request

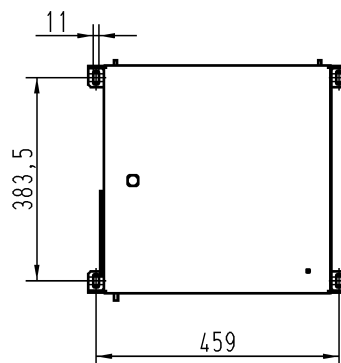

All data represent the current state of development at the time of print and are therefore non-binding.

HARTING reserves the right to modify designs without prior notice.

Technical characteristics

General

| | |
|---------------------------------|--|
| Housing | VA steel, powder coated |
| Physical dimensions (W x H x D) | 430 mm x 430 mm x 220 mm |
| Degree of protection | IP 55 (standard), IP 65 (optional) |
| Colour | light grey (RAL 7073) |
| Power supply | 230 V or 110 V |
| Cable bushings standard: | up to 10 bushings for Power, Ethernet, GPIOs, antenna cables |
| optional: | <ul style="list-style-type: none"> • Han-Yellock® 1 Han-Yellock® 60 bulkhead mounted housing for Power, Ethernet and GPIOs 1 Han-Yellock® 60 bulkhead mounted housing for up to 4 antenna cables • Han® B 1 Han® 24 B bulkhead mounted housing for Power, Ethernet and GPIOs 1 Han® 24 B bulkhead mounted housing for up to 4 antenna cables • HARTING Push Pull 1 HARTING Push Pull for Power 1 HARTING Push Pull for Ethernet up to 4 bushings for antenna cables |

Installed components

| | |
|----------------------|--|
| standard | <ul style="list-style-type: none"> • RFID Reader Ha-VIS RF-R500-p-EU • Ethernet Switch Ha-VIS eCon 2050-A • Power supply Ha-VIS pCon 2120-24 <p>All components are completely connected, tested and ready for field installation.</p> |
| other configuration: | on request |

Ha-VIS RFID Reader

| | |
|----------------------|--|
| standard: | <ul style="list-style-type: none"> • for harsh industrial environments • up to 16 m read range • Degree of protection up to IP 64 • excellent UHF performance in metal containing • 865 MHz ... 870 MHz • 5 / 5 GPIOs • connections for Ethernet, USB, RS 232, RS 485 • up to 4 W transmission power |
| other configuration: | on request |

Environmental conditions

| | |
|-------------------|----------------------------|
| Temperature range | depending on configuration |
|-------------------|----------------------------|

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[HARTING:](#)

[20914211001](#)