

# microSD/TF Card Connector

## **FCN-260 Series**

# **RoHS compliant**

microSD is currently the world's smallest memory card storage system, specifically designed for use with ultra-small mobile phones and other devices. Like the miniSD, the microSD/TransFlash is ideal for use in storing media-rich files such as music, videos, and photographs in compatible mobile phones.

Fujitsu's microSD connector offers the lowest profile height (1.65mm) currently available in the market.

Featuring Fujitsu's precise and insert molding technology, the FCN-560 series micro SD connector measures 15mm (D) x 14mm (W) x 1.6mm (H) and has a life cycle of ten thousand insertions/withdrawals.

Fujitsu's connector uses a proprietary push-push structure that provides positive tactile feedback during card insertion and withdrawal.

A card drop protection mechanism prevents the card from falling out during pre-insertion and forced card extraction after it's locked in. When ejected, the card travels 3.5mm from its locked position.

Item	Specification
Operating temperature range	-20°C to +70°C
Current rating	AC 0.5A
Voltage rating	AC/DC 5V
Contact resistance	100mΩ maximum
Dielectric withstanding voltage	AC 500V for 1 minute
Insertion/Withdrawl life	10,000 cycles

Tape and reel: 1, 500 pcs/reel




## FEATURES

- Reduction in seize and weight (15 (D) x 14 (W) x 1.65 (H)mm) with unique push-push structure
- Half-lock to prevent forced card extraction, good operability with sense of click for insertion
- Smooth card inserion/withdrawl with unique drop-protection mechanism
- With card detections switch
- Card ejection distance 3.5mm
- FCN-568Z008-G/0M

Item	Specification
Insulating material	LCP, UL94 V-0
Contact	Copper Alloy Plating NiPdAu
Pin / Spring	SWPA
Metal Cover	Stainless steel

# microSD/TF Card Connector

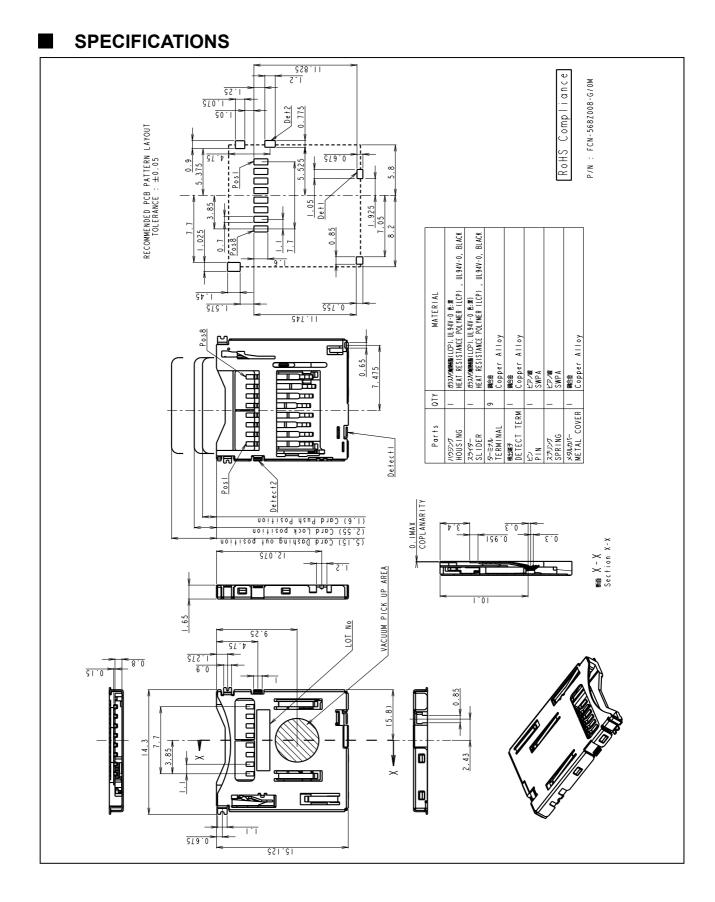

#### **SPECIFICATIONS** <u>2.8±0.2</u> 20±0.3 A – ا TOP COVER TAPE 4 ¢ φ ¢ φ φ φ • -\$ φ φ -\$ • ¢ Φ .75±0. 2 4±0.1 累損ビッチ 40±0.2 ACCUMLATIVE PITCH Section A-A Ø1.5\*8 25.4±I - 3 NOTE సి 1. 報告的意:1.500個/リール NUMBER OF CONNECTORS : I500PCS/REEL 2. リードデープレチー部 TOP TAPE LENGTH トップテープリーチー部 TOP TAPE LEADER PART : 800MIN トップテープジーター部 TOP TAPE BONDED PART(EMPTY) : 20PCS MIN 本職名(空歌) TAIL PART LEMPTY) : 400MIN 3. トップテープ調査数 0. IN--I.3N 出物部に設備 PEELING OFF FORCE OF TOP TAPE : 0. IN~-I.3N IEEG0286-3 (JIS C 0806-3) 4. MMI 1EL60220-3 1310 - 3 - 2 - 2 - 4. MR キャリアテーブ(CARRIER TAPE) : ポリプロピレン(POLYPROPYLENE) トップテーブ(TOP TAPE) : PET,PE,PEF リール(REEL) : ポリスチレン(POLYSTYLENE) Ø 382 PARTS LABEL ( PARTS No, LOT No, )

### Fujitsu Components International Headquarter Offices

Japan Fujitsu Component Limited Gotanda-Chuo Building 3-5, Higashigotanda 2-chome, Shinagawa-ku Tokyo 141 8630, Japan Tel: (81-3) 5449-7010 Fax: (81-3) 5449-2626 Email: promothg@fcl.fujitsu.com	Europe Fujitsu Components Europe B.V. Diamantlaan 25 2132 WV Hoofddorp Netherlands Tel: (31-23) 5560910 Fax: (31-23) 5560950 Email: info@fceu.fujitsu.com
Web: www.fcl.fujitsu.com	Web: emea.fujitsu.com/components/
North and South America Fujitsu Components America, Inc. 250 E. Caribbean Drive Sunnyvale, CA 94089 U.S.A. Tel: (1-408) 745-4900 Fax: (1-408) 745-4970 Email: components@us.fujitsu.com Web: http://us.fujitsu.com/components/	Asia Pacific Fujitsu Components Asia Ltd. 102E Pasir Panjang Road #01-01 Citilink Warehouse Complex Singapore 118529 Tel: (65) 6375-8560 Fax: (65) 6273-3021 Email: fcal@fcal.fujitsu.com Web: http://www.fujitsu.com/sg/services/micro/components/

©2007 Fujitsu Components America, Inc. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

Fujitsu Components America or its affiliates do not warrant that the content of datasheet is error free. In a continuing effort to improve our products Fujitsu Components America, Inc. or its affiliates reserve the right to change specifications/datasheets without prior notice. Rev. April 26, 2007.