



# QEA95 / QEA95V

SMD 9.6x11.4 TCXO / VC-TCXO – Communications equipment applications  
*Specification (Rev-E)*

---

▣ Electrical Characteristics .....	P01
▣ Environmental Specifications .....	P02
▣ Mechanical Characteristics .....	P02
▣ Ordering Information .....	P03
▣ Test Circuit .....	P03
▣ Packaging Drawing .....	P04
▣ Suggested Reflow Soldering .....	P05

# QEA95 / QEA95V

SMD 9.6x11.4 TCXO / VC-TCXO – Communications equipment applications

Specification (rev-E)

March 16<sup>th</sup>, 2006

## Electrical Characteristics

- Output : Clipped SineWave
- Load : 10KΩ//10pF
- Standard frequency : 10.0 – 12.8 – 13.0 – 14.4 – 14.7456 – 16.384 – 19.2 – 19.44 – 20.0 – 21.4 MHz

Electrical Parameters	Unit	Minimum	Typical	Maximum	Test conditions
<b>Frequency Range</b>	MHz	9.6		40	
<b>Operating Temperature Range</b>	°C		-30 to 75	-40 to 85	Refer to Ordering Information
<b>Storage Temperature Range</b>	°C	-40		85	
<b>Power supply</b>	V	3.0		5.0	Refer to Ordering Information
<b>Frequency Adjustment</b> - type QEA95 - type QEA95V - type QEA95V1	± ppm	3.0 3.0 Trimmerless			Mechanical Trimmer
<b>Preset Frequency</b> - type QEA95 - type QEA95V - type QEA95V1	± ppm			0.5 0.5 2.0	At 25°C ± 2°C
<b>Stability vs Operating Temperature Range</b>	± ppm		2.5		Refer to Ordering Information
<b>Stability vs voltage variation (± 5%)</b>	± ppm			0.3	For frequency less than 28MHz (see Note 1)
<b>Stability vs load variation (± 10%)</b>	± ppm			0.3	
<b>Aging</b> (First year at 25°C)	± ppm			1.0	For frequency less than 28MHz (see Note 2)
<b>Supply Current</b> 9.6MHz ≤ Fo < 16.000MHz 16.0MHz ≤ Fo ≤ 40.000MHz	mA			1.5 2.0	With load 10KΩ//10pF
<b>Output voltage</b> 9.6MHz ≤ Fo < 16.000MHz 16.0MHz ≤ Fo ≤ 40.000MHz	Vp-p			0.8 0.7	Clipped Sine DCcut
<b>Pulling Range</b> - type QEA95 - type QEA95V - type QEA95V1	ppm	- 5 8		- 10 14	5V => Vc=2.50 ± 2.00V 3.3V=> Vc=1.65 ± 1.35V 3.0V=> Vc=1.50 ± 1.00V
<b>Phase Noise</b> offset 10Hz offset 100Hz offset 1KHz offset 10KHz	dBc/Hz		-90 -128 -147 -148		Typical value for 10MHz TCXO.

**Note 1** : for frequency ≥ 28MHz, stability vs voltage variation (± 5%) is ± 1.0ppm max

**Note 2** : for frequency ≥ 28MHz, aging first year ± 2.0ppm max

# QEA95 / QEA95V

SMD 9.6x11.4 TCXO / VC-TCXO – Communications equipment applications  
 Specification (rev-E)


March 16<sup>th</sup>, 2006

## Environmental Specifications


Item	Specifications
Vibration Test	Freq : 10 ~ 55Hz Cycle : 2.00mm, 3 directions each 2 hours
Shock Test	Random drop onto concrete 10 times from height of 75 cm
Humidity	RH : 90% at 40degC during 200 hours

## Mechanical Characteristics

### BOTTOM VIEW

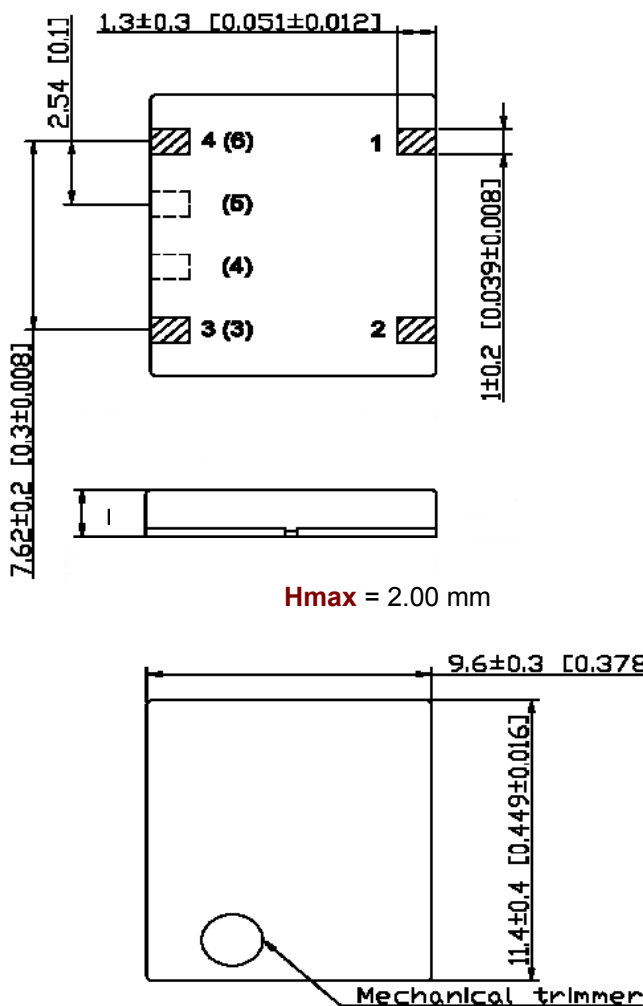

### SUGGESTED PAD

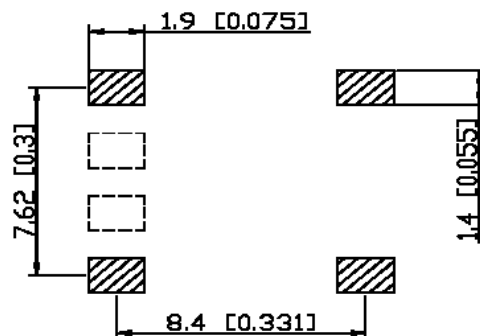

Pin connections			
4 pins version		6 pins version	
#1	Vcont or NC	#5	Vcont or NC
#2	GND	#1,2,4	GND
#3	Output	#3	Output
#4	Vcc	#6	Vcc

Marking			
	QEA95	QEA95V	QEA95V1
Line 1	E2 AA0*	G2 AA0*	H2 AA0*
Line 2	Frequency in MHz (6 digits)		
Line 3	Date code (YYWW) – Manuf. code		

\* : see letters for Temperature stability, supply voltage and output

Example for QEA95 AA0 / 10.000MHz

- ⇒ Line 1 : E2 AA0
- ⇒ Line 2 : 10.000
- ⇒ Line 3 : 0610-R

# QEA95 / QEA95V

SMD 9.6x11.4 TCXO / VC-TCXO – Communications equipment applications


Specification (rev-E)

March 16<sup>th</sup>, 2006

## Ordering Information

Part numbering system					
QEA95	V	A	E	O	12.800MHZ
Package type	Voltage Control	Temperature Stability	Supply voltage	Output	Nominal Frequency (MHz)
<b>SMD Package</b> <b>QEA95 : SMD</b> 9.6x11.4	<b>Blank :</b> TCXO with trimmer <b>V :</b> VC-TCXO with trimmer <b>V1 :</b> VC-TCXO trimmerless	<b>A :</b> ± 2.5ppm vs -30 to +75°C <b>B :</b> ± 1.5ppm vs -20 to +70°C <b>C :</b> ± 3.5ppm vs -40 to +85°C <b>D :</b> ± 5.0ppm vs -40 to +85°C <b>E :</b> ± 2.0ppm vs -20 to +70°C	<b>A :</b> + 5.0V <b>D :</b> +3.3V <b>E :</b> + 3.0V	<b>0 :</b> Clipped sine wave	Please enter the nominal frequency

## Test Circuit

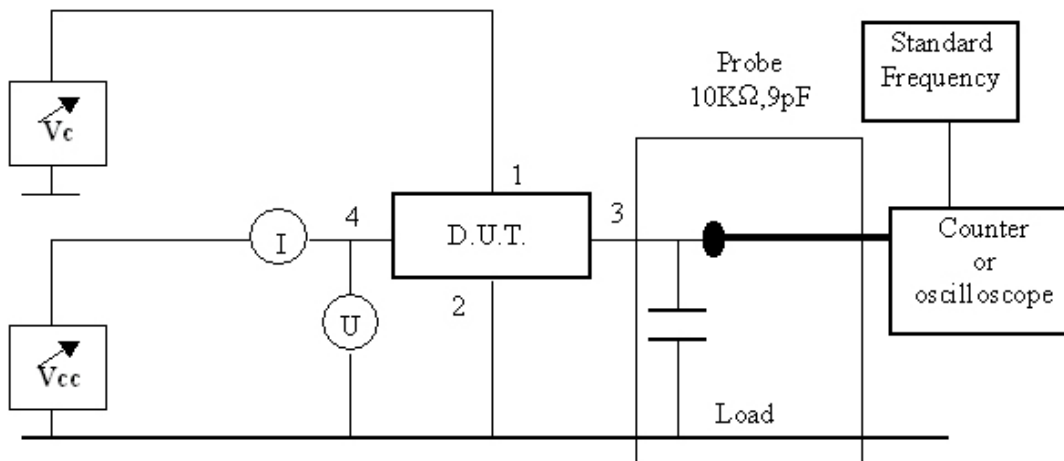


# QEA95 / QEA95V


SMD 9.6x11.4 TCXO / VC-TCXO – Communications equipment applications  
 Specification (rev-E)

March 16<sup>th</sup>, 2006

## ▣ Tape Drawing

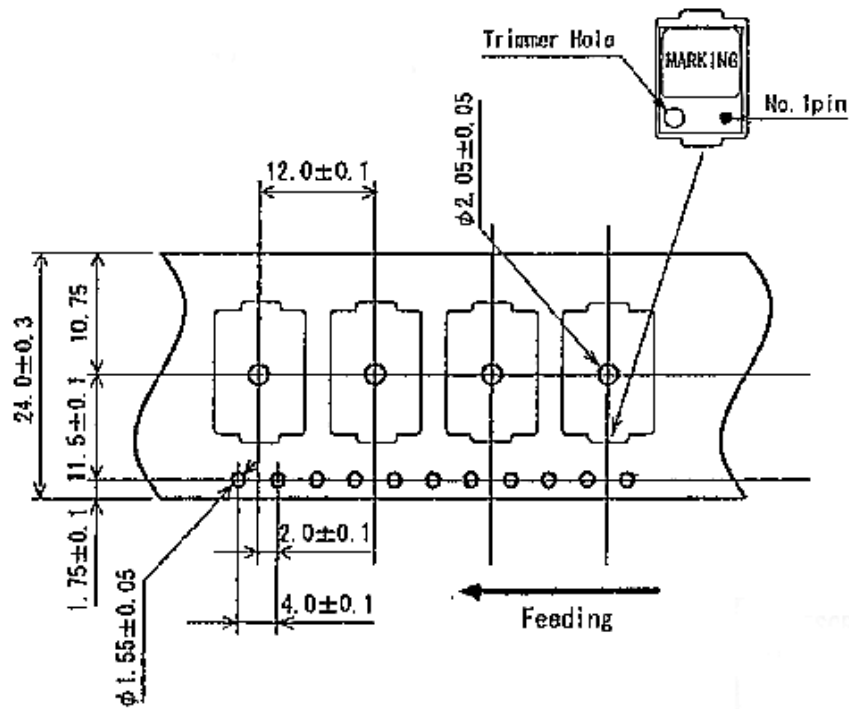

## ▣ Reel Drawing

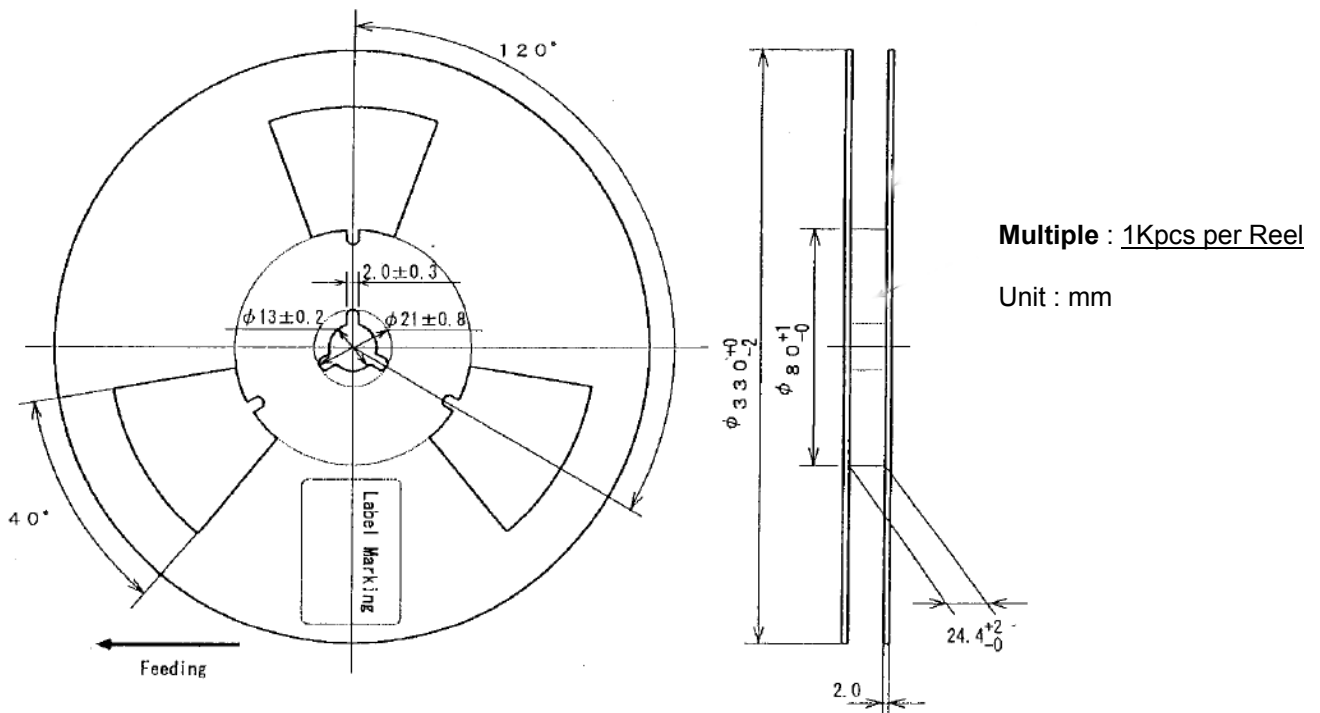

# QEA95 / QEA95V

SMD 9.6x11.4 TCXO / VC-TCXO – Communications equipment applications  
 Specification (rev-E)

March 16<sup>th</sup>, 2006

## ▣ Suggested Reflow Soldering Profile

