


# SPECIFICATION FOR APPROVAL

REF : 20070123-A




PAGE: 1

PROD. NAME	SMD POWER INDUCTOR	ABC'S DWG NO.	CB3011□□□□L□-□□□
		ABC'S ITEM NO.	

## I . CONFIGURATION & DIMENSIONS :

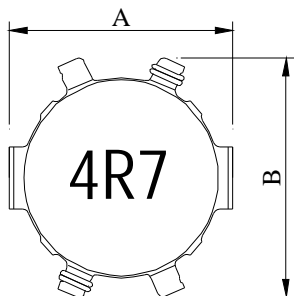


- A : 3.60±0.15      m / m
- B : 3.90 max.      m / m
- C : 1.10±0.10      m / m
- D : 1.10±0.30      m / m
- E : 0.80±0.20      m / m
- F : 1.60 ref.      m / m
- G : 4.00 ref.      m / m
- H : 1.00 ref.      m / m

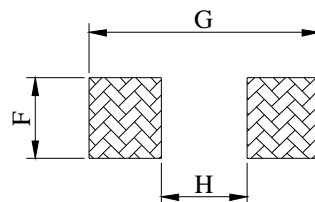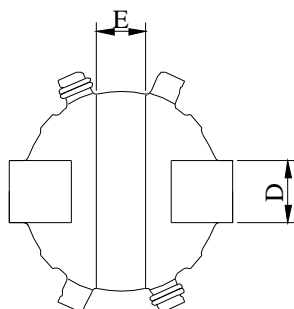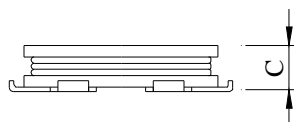

(PCB Pattern Suggestion)

## II . SCHEMATIC DIAGRAM :

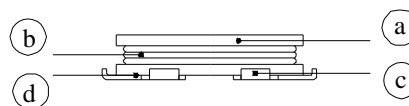


## III . MATERIALS :

- a . Core : Ferrite core
- b . Wire : Enamelled copper wire
- c . Base : Cu/Ag(1.0um)
- d . Adhesive : Epoxy resin
- e . Remark : Products comply with RoHS' requirements

Peak Temp : 260°C max.  
 Max time above 230°C : 50sec max.  
 Max time above 200°C : 70sec max.

## IV . GENERAL SPECIFICATION :

- a . Temp. rise : 40°C typ.
- b . Storage temp. : -40°C ----+120°C
- c . Operating temp. : -40°C ----+125°C  
(included Temp. rise)
- d . Resistance to solder heat : 260°C .10 secs.

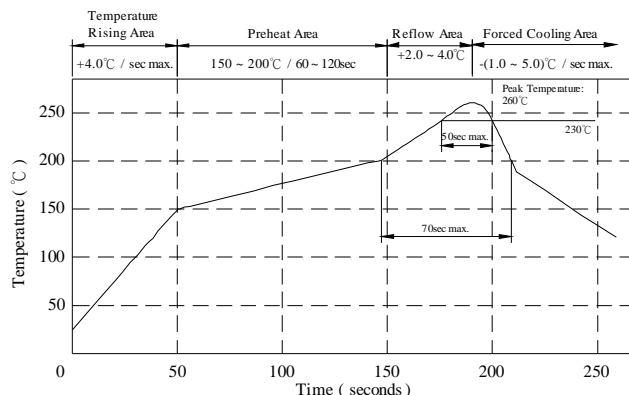

AR-001A

# SPECIFICATION FOR APPROVAL

REF : 20070123-A

PAGE: 2

PROD. NAME	SMD POWER INDUCTOR	ABC'S DWG NO.	CB3011□□□□L□-□□□
		ABC'S ITEM NO.	

## V . ELECTRICAL CHARACTERISTICS :

DWG No.	Inductance ( $\mu$ H) 0.1V/100KHz	RDC ( $\Omega$ ) max.	Irms. ( A ) typ.	Isat. ( A ) max.
CB30111R0ML□-□□□	1.0 $\pm$ 20%	0.11	1.50	2.30
CB30111R8ML□-□□□	1.8 $\pm$ 20%	0.14	1.30	1.70
CB30112R5ML□-□□□	2.5 $\pm$ 20%	0.18	1.10	1.40
CB30113R3ML□-□□□	3.3 $\pm$ 20%	0.26	0.85	0.90
CB30114R7ML□-□□□	4.7 $\pm$ 20%	0.32	0.72	0.88
CB30116R8ML□-□□□	6.8 $\pm$ 20%	0.48	0.67	0.77
CB3011100ML□-□□□	10.0 $\pm$ 20%	0.70	0.52	0.59
CB3011150ML□-□□□	15.0 $\pm$ 20%	0.96	0.42	0.45
CB3011220ML□-□□□	22.0 $\pm$ 20%	1.50	0.34	0.39

1). Packing information : A: Bulk B: Taping Reel

2)."- □□□ ":Reference code

3). Irms. base on temp. rise 40°C typ.

4). Isat. base on  $\Delta$ L/LOA=10% max.

# SPECIFICATION FOR APPROVAL


REF : 20070123-A

PAGE: 3


PROD. NAME	SMD POWER INDUCTOR	ABC'S DWG NO.	CB3011□□□□L□-□□□
		ABC'S ITEM NO.	

## VI . PACKAGING INFORMATION

### ( 1 ) Configuration

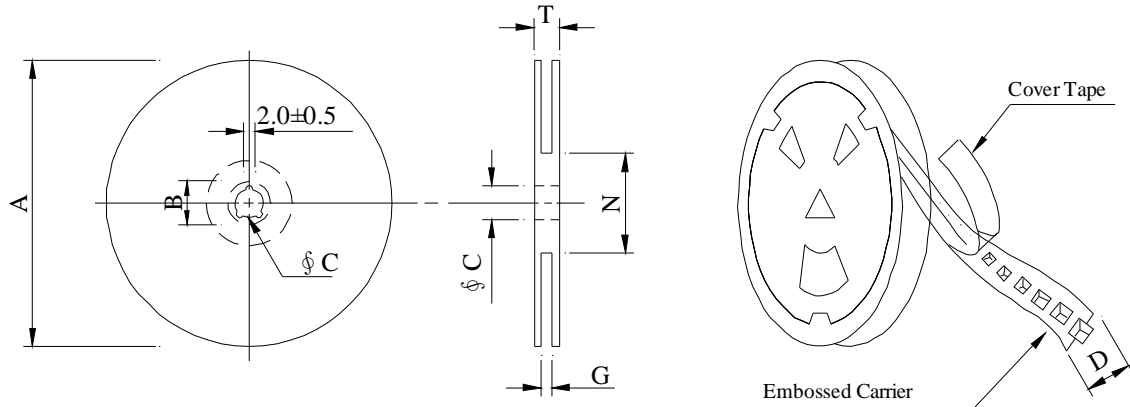

※Carrier tape width : D

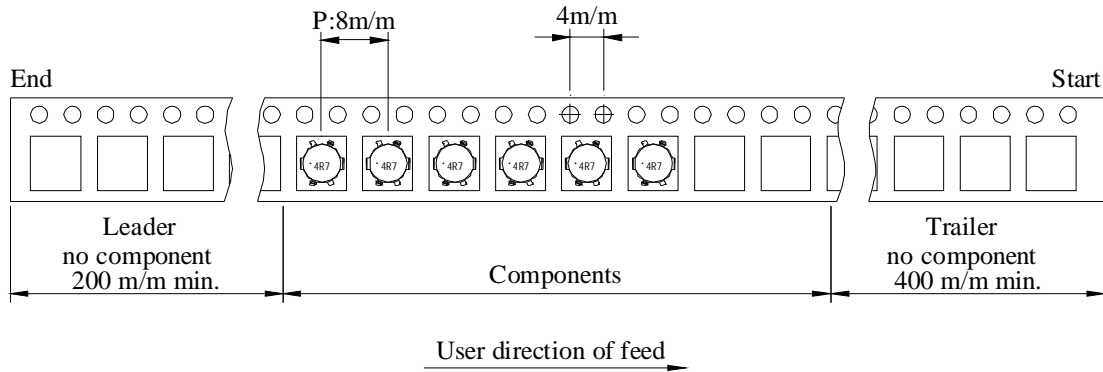

### ( 2 ) Dimensions

Unit:m/m

Style	A	B	C	D	G	N	T
07 - 12	178	21±0.8	13	12	14 <sup>+0</sup>	50 <sup>-0</sup>	18.4

### ( 3 ) Q'TY & G.W. Per package

Series	Inner : Reel			Outer : Carton		
	Q'TY (pcs)	G.W. (gw)	Style	Q'TY (pcs)	G.W. (Kg)	Size (cm)
CB3011	1,500	180	07 - 12	60,000	7.2	42 x 41 x 24

AR-001A


# SPECIFICATION FOR APPROVAL

REF : 20070123-A

PAGE: 4

PROD. NAME	SMD POWER INDUCTOR	ABC'S DWG NO.	CB3011□□□□L□-□□□
		ABC'S ITEM NO.	

**VII . DWGING NUMBER EXPRESSION :**

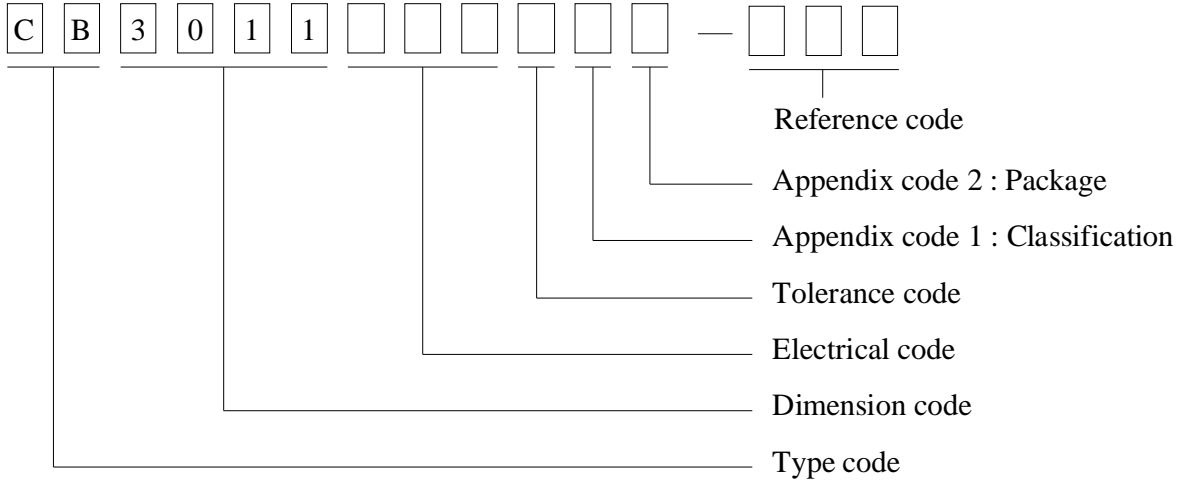

**Appendix code 1 : Product Classification**

- L : Lead Free Standard products comply with RoHS' requirements
- 1 ~ 9 : Lead Free Special products comply with RoHS' requirements

**Appendix code 2 : Package Information**

Code	Inner package	Inner package Q'TY	Remark
A	T.B.D.	T.B.D.	
B	T /R (Reel package)	1500 pcs	

# SPECIFICATION FOR APPROVAL

REF : 20070123-A

PAGE: 5

PROD. NAME	SMD POWER INDUCTOR	ABC'S DWG NO.	CB3011□□□□L□-□□□
		ABC'S ITEM NO.	

**VIII . RELIABILITY TEST :**

Test item	Specification	Test condition						
Solderability	More than 95% of the terminal electrode shall be covered With fresh solder.	Preheat : 155°C / 4 hours. Solder : Sn96.5 / Ag3 / Cu0.5 or equivalent Solder temp. : 235±5°C Flux : Rosin Dip time : 5±0.5 seconds						
Thermal shock test ( Temp. cycle )	Electrical oharacteristics shall not change more than ±20%	<table style="width: 100%; border: none;"> <tr> <td style="text-align: center;">Room temp. 15 minutes</td> <td style="text-align: center;">→</td> <td style="text-align: center;">-40 °C 30 minutes</td> </tr> <tr> <td style="text-align: center;">Room temp. 15 minutes</td> <td style="text-align: center;">→</td> <td style="text-align: center;">+125 °C 30 minutes</td> </tr> </table> <p>Total : 50 cycles</p>	Room temp. 15 minutes	→	-40 °C 30 minutes	Room temp. 15 minutes	→	+125 °C 30 minutes
Room temp. 15 minutes	→	-40 °C 30 minutes						
Room temp. 15 minutes	→	+125 °C 30 minutes						
Humidity Test		Temperature : 40±2°C Humidity : 90±5% Time : 1000 hours						
High temp. Resistance test		Temperature : 125±5°C Applied current : Per spec. Time : 96 hours						

AR-001A



# SPECIFICATION FOR APPROVAL

REF : 20070123-A

PAGE: 6

PROD. NAME	SMD POWER INDUCTOR	ABC'S DWG NO.	CB3011□□□□L□-□□□
		ABC'S ITEM NO.	

**IX . UL CARD :**

OBMW2 September 8, 2000

Magnet Wire-Component

JUNG SHING WIRE CO LTD E174837

231 CHUNG CHENG RD, SEC 3 JEN-TEH HSIANG, TAINAN  
HSIEN TAIWAN

Mtl Dsg	Mark Dsg	BC	Coat Typ	OC	ANSI Type	Temp Class
AIW	---	Polyamideimide	---	---	MW81-C	220
CFUEWB	---	Polyurethane	---	---	MW75C	130
EIAIW	---	Polyesterimide	Polyamideimide	---	MW35C	200
EILOCKY	---	Polyesterimide	Polyamide	---	---	180
EILOCKW	---	Polyesterimide	Modified Epoxy	---	---	200
EIW	---	Polyesterimide	---	---	---	220
EIW-2	---	Polyesterimide	---	---	MW74-C	200
FL.EILOCKY	---	Modified Polyester	Polyamide	---	---	155
LSFFW	---	Polyurethane	---	---	MW79-C	155
LSUEW	---	Polyurethane	---	---	---	130
PEW	---	Polyester	---	---	---	155
PEY	---	Polyester	Nylon	---	MW24-C	155
SF.FLW	---	Modified Polyester	---	---	MW26C	155
SF.EIW	---	Polyesterimide	---	---	MW77C	180
SF.BY@	---	Modified Polyester	Nylon	---	MW27-C	155
SF.FLY@	---	Modified Polyester	Nylon	---	MW27-C	155
SF.BLOCKBS	---	Modified Polyester	Modified Polyamide	---	---	155
SF.EILOCKY#	---	Polyesterimide	Polyamide	---	---	180
SF.EILOCKBS	---	Polyesterimide	Modified Polyamide	---	---	180
SF.BW@	---	Modified Polyester	---	---	MW26C	155
SFFW	---	Polyurethane	---	---	MW79	155

287806002 Page 1 of 2

A not-for-profit organization dedicated to public safety and committed to quality service

Mtl Dsg	Mark Dsg	BC	Coat Typ	OC	ANSI Type	Temp Class
SFFY	---	Polyurethane	Polyamide	---	MW80C	155
UEW-1	---	Polyurethane	---	---	MW2-C	105
UEW-2	---	Polyurethane	---	---	---	130
UEW-4	---	Polyurethane	---	---	MW75C	130
UEY	---	Polyurethane	Nylon	---	MW28-C	130
UEY-2	---	Polyurethane	Polyamide	---	MW28-C	130

287806002 Page 2 of 2

OBMW2E174837  
September 8, 2000