UNCONTROLLED DOCUMENT

29F0328-0T0-10

Pb

PHYSICAL DIMENSIONS:

A	8.34 [.328]	± 0.12 [.005]
B	10.88 [.428]	± 0.15 [.006]
C	10.57 [.416]	± 0.20 [.008]
D	7.62 [.300]	± 0.13 [.005]
E	2.54 [.100]	± 0.05 [.002]
G	3.18 [.125]	± 0.38 [.015]
H	11.43 [.450]	± MAX

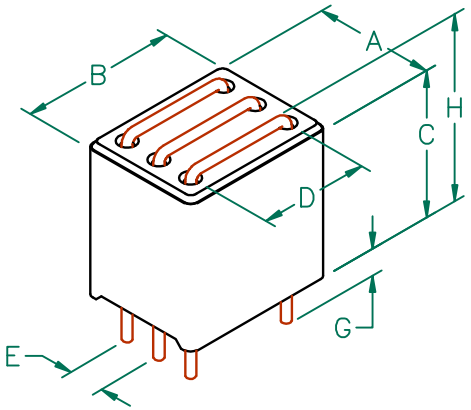

ELECTRICAL CHARACTERISTICS:			
Z @ 100MHz (Ω)		DCR (Ω)	Rated Current
Nominal	342		
Minimum	257		
Maximum	427	0.01	10,000 mA

1. BULK PACKED 910 per CASE.
2. COMPONENTS SHOULD BE ADEQUATELY PREHEATED BEFORE SOLDERING.
3. TERMINATION FINISH IS 100% TIN.

HOLE PATTERN FOR THRU-HOLE INSERTION

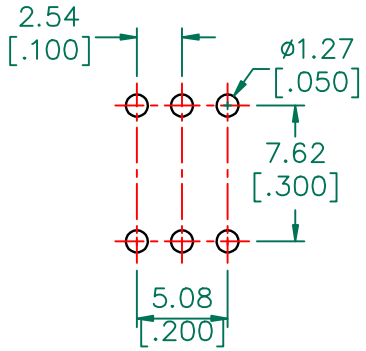

|Z| , R, AND X vs. FREQUENCY

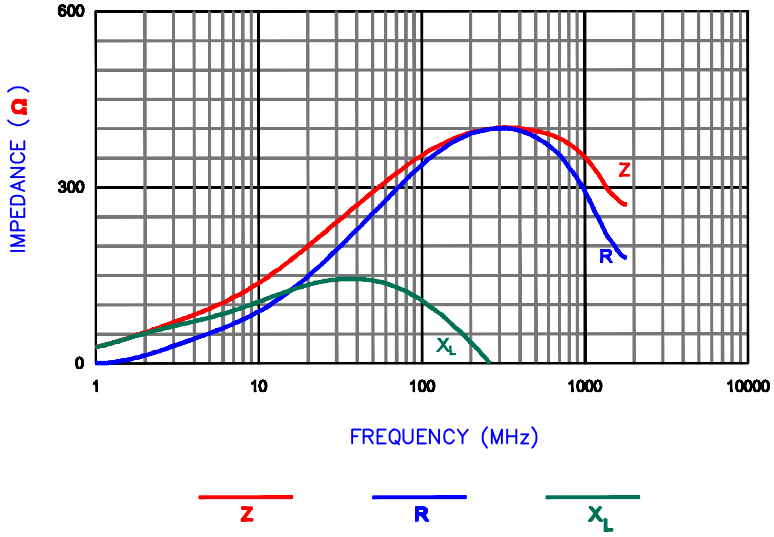

RoHS 2002/95/EC

HP 4396A Network/Spectrum Analyzer
HP 43961A Impedance Test Kit, HP 16192A Test Fixture

REV	DESCRIPTION	DATE	INT
C	ADD ROHS SYMB. UPDATE LOGO	10/20/08	JRK
B	UPDATE COMPANY LOGO	04/24/07	JRK
A	ORIGINAL DRAFT	04/30/04	JRK

DIMENSIONS ARE IN mm [INCHES].

This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.

Laird TECHNOLOGIES

PROJECT/PART NUMBER:	REV	PART TYPE:	DRAWN BY:
29F0328-0T0-10	C	CNZ ASSEMBLY	TMB

DATE: 04/30/04 | SCALE: NTS | SHEET: 2 of 3

CAD # 29F0328-0T0-10-C-2 | TOOL # H0328