



DIMENSION

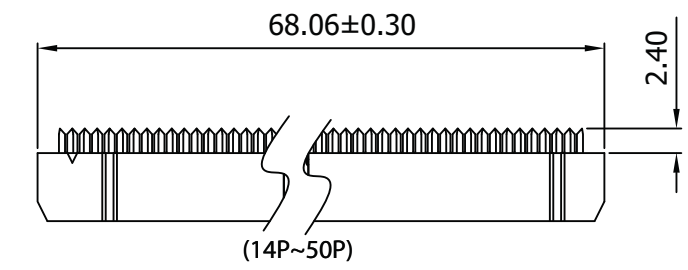


Material:


- Insulator: P.B.T. 30% Glass Fiber, UL 94V-0
- Contact Material: Phosphor Bronze, Gold flash over Nickel

Electrical:

- Current Rating: 1Amp DC
- Insulation Resistance: 3,000MΩ Min.
- Contact Resistance: 30MΩ Max.
- Dielectric Withstanding: 500V AC
- Operating Temperature: -40°C ~ +105°C
- Terminated with 1.27MM pitch flat ribbon cable.

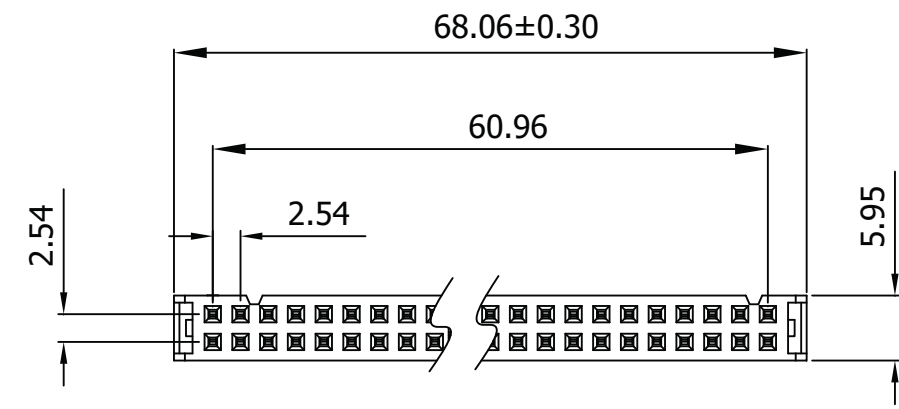

Unit: MM±0.20MM

Scale	1:1						Name	Item No.	
TOLERANCE						Drawn	10.19.11	<h2 style="text-align: center;">AWP50-8240-T-R</h2>	
X.X	±0.40				Approved		Title IDC-Socket - 2.54MM Pitch, Gold Flash, w/o Central Lug, w/o Strain Relief, 50 Contacts		
X.XX	±0.25								
X.XXX	±0.15								
Angle	±3°						Drawing No.	<h3 style="text-align: right;">rev00</h3>	
		Modification		Date	Name			Replace	Sheet

