





## RECOMMENDED BOARD LAYOUT VIEWED FROM TOP

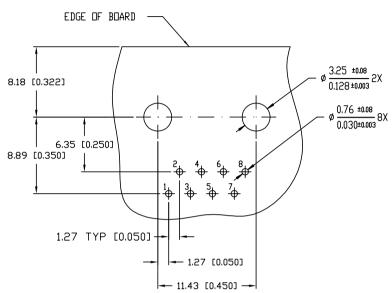







## NOTE :

- 1 THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND DTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
- 2 THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.60mm MINIMUM THICK CIRCUIT BOARD.
- 3 IF LF P/N PACKAGING MEETS GS-14-920 SPECIFICATION.

1 |

LEFT EAR MOUNTING

mat	mat'l. code						:e /	tolerance			projection			hproduct family									
						302		ISD1101 ISD406			<b>Д</b>		MOD JACK										
ltr	ltrecn nødr date					raņ	ces	unless other			wise	3pe	<del>cif</del> ie	dtitle									
Т	ECR V10424 RIMUNUR 12FEB.0		BC LOH	C LOH 26JAN.00		اط چ	0.X		0.X±0.3		l mm		8 POS HORIZONTAL										
U			RURNER	12FEB.0	المااو	בַּרַבַיי		0.XX	K±0.15		-												
V			06JAN.0	0°±:	2*  =	= 0.XX		XX±0.05		scale 2.0			P.C.B. MOD JACK ASSY										
W	N08-0074 SH MI		sh miao	30APR.08	dr	dr		Г	15JUN.98				dwg no			S	sheet2of3			size			
X	X ELX-N-01066		CH WWO	13MAR.1	eng	engr j		JANET '		15JUN.98		FCi		68899						$A_4$			
					chr	М	CHENG		19FEB.01					00099							H4		
					app	dм	CHE	NG	19FI	B.01		_		typ	oe .	Pro	duct	Cu	stom	er D	raw	ing	
she	sheet re		/isio	n																			
ind	index she		et																				

В

form: A4mmXLc

2

STATUS:Released

Printed: Apr 19,42012

PDS: Rev :X 3

1 | 2

**FC**J

FCIconnect.cor

3|

PRODUCT NO.	DIM. A	DIM. B	STYLE	POSITIONS LOADED	CONTACT PLATING	HDUSING COLOR	MOUNTING EARS	REMARKS
68899-001 -001LF	-	-	UNKEYED	ALL	0.76um /30″u GXT	BLACK	YES	-
-002 -002LF	1.25 /0.050	2.69 /0.106	KEYED	ALL	5u' Au + high performance lubricant	BLACK	YES	-
-003 -003LF	-	-	UNKEYED	2,3,4,5,6,7	5u' Au + high performance lubricant	BLACK	YES	-
-004 -004LF	-	-	UNKEYED	ALL	5u" Au + high performance lubricant	BLACK	NΠ	-
-004RLF	-	-	UNKEYED	ALL	5u' Au + high performance lubricant	RED	NΠ	-
-004GLF	-	-	UNKEYED	ALL	5u' Au + high performance lubricant	GREEN	NΠ	-
-005 -005LF	-	-	UNKEYED	ALL	5u' Au + high performance lubricant	GRAY	N□	-
-006 -006LF	-	-	UNKEYED	ALL	5u' Au + high performance lubricant	BLACK	YES	-
-007 -007LF	1.25 /0.050	2.69 /0.106	KEYED	ALL	5u' Au + high performance lubricant	BLACK	NΠ	-
-008 -008LF	-	-	UNKEYED	ALL	5u' Au + high performance lubricant	BLACK	LEFT ONLY	-
-009 -009LF	-	-	UNKEYED	ALL	5u' Au + high performance lubricant	BLACK	RIGHT ONLY	-
-010 -010LF	-	-	UNKEYED	ALL	1,27um /50°u GXT	BLACK	YES	-
−011 −011LF	-	-	UNKEYED	1,4,5,8	5u' Au + high performance lubricant	BLACK	YES	-
-012 -012LF	-	-	UNKEYED	ALL	5u' Au + high performance lubricant	BLACK	ND	-
-013 -013LF	-	-	UNKEYED	ALL	1,27um /50°u GXT	BLACK	NΠ	-
-014 -014LF	1.25 /0.050	2.69 /0.106	KEYED	ALL	5u' Au + high performance lubricant	BLACK	NΠ	-
-015 -015L <u>F</u>	1.25 /0.050	2.69 /0.106	KEYED	ALL	1,27um /50°u GXT	BLACK	NΠ	-

LEAD FREE PRODUCT NO.

matíl code						surface / tolerance							projectionproduct family										
						IS□1302 V   IS□110						\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \			MOD JACK								
	ecn			dat				ces (	unles	ss o	ther	wise	3pe	cifie	ıtitı	.e							
Т	ECR SO0022 BC LOH 2		H 26JAN.00		lano	غام		0.X=	0.X±0.3		mm		8 POS HORIZONTAL										
U	ECR V	10424	RERUBNOR	12FEB.01		ung	בַּל		0.XX	.XX±0.15		-											
٧	N05-	0002	YS	06JA	N.01	0°±2	0°±2"  =			±0.05	0.05 scale			.0	P.C.B. MOD JACK ASSY								
W	N08-	0074	sh miao	30API	R.08	dr		JANET 15JUN.9			JN.98	_			dwg no					sheet3of3			size
Х	K ELX-N-0106675H MM		SH MIAO	13MA	R.12	eng	└ JANET			15JUN.98		<b>FCi</b>		. <b>i</b>	68899					المما			
						chr M		CHENG		19FEB.01		' <b>3</b>		7	00099						Α4		
					αpp	d M	CHE	NG	19FI	EB.01		7		typ	e e	Pro	duct	Cu	stom	er D	)raw	ing	
she	sheet rev		/isio	n																			
ind	index sheet																						

В

form: A4mmXLc

2

PDS: Rev :X 3

STATUS:Released

Printed: Apr 19,42012

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

FCI:

68899-004 68899-001