




HV HX

HIGH VOLTAGE RECTIFIERS  
ULTRA-MINIATURE  
AND MINIATURE

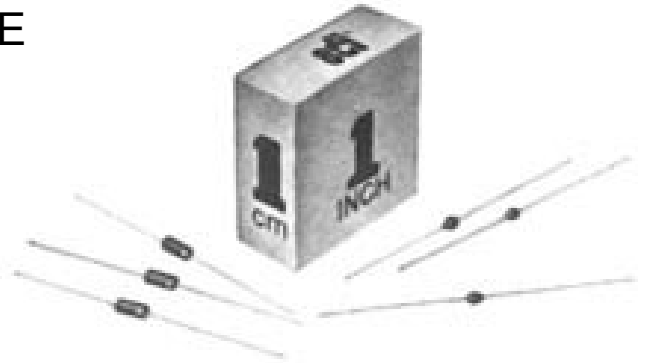

- SMALL SIZE EPOXY PACKAGES
- FAST AND STANDARD RECOVERY TIMES
- PRV TO 10,000 VOLTS
- VERY LOW REVERSE LEAKAGE

EDI Type No.	Peak Reverse Voltage PRV (Volts)	Avg. Forward Current $I_o$ (mA) 100°C	Max. Fwd Voltage @ 10mA & 25°C	Max. Peak Surge Current, $I_{FSM}$ (8.3ms) (Amps)	Package Style
--------------	----------------------------------	---------------------------------------	--------------------------------	---	---------------

ULTRA-MINIATURE, STANDARD RECOVERY

EDI Type No.	Peak Reverse Voltage PRV (Volts)	Avg. Forward Current $I_o$ (mA) 100°C	Max. Fwd Voltage @ 10mA & 25°C	Max. Peak Surge Current, $I_{FSM}$ (8.3ms) (Amps)	Package Style
HV 15 PD	1,500	80	6.0	5	P
HV 20 PD	2,000				
HV 25 PD	2,500				
HV 30 PD	3,000				
HV 10 P	1,000	50	6.0	5	P
HV 20 P	2,000				
HV 30 P	3,000				
HV 40 P	4,000				
HV 50 P	5,000				

ULTRA-MINIATURE, 100 NANOSECOND RECOVERY (FIG.4)

EDI Type No.	Peak Reverse Voltage PRV (Volts)	Avg. Forward Current $I_o$ (mA) 100°C	Max. Fwd Voltage @ 10mA & 25°C	Max. Peak Surge Current, $I_{FSM}$ (8.3ms) (Amps)	Package Style
HX 15 PD	1,500	60	6.0	3	P
HX 20 PD	2,000				
HX 25 PD	2,500				
HX 30 PD	3,000				
HX 10 P	1,000	40	10.0	3	P
HX 20 P	2,000				
HX 30 P	3,000				
HX 40 P	4,000				
HX 50 P	5,000				

MINIATURE, 100 NANOSECOND RECOVERY (FIG.4)

EDI Type No.	Peak Reverse Voltage PRV (Volts)	Avg. Forward Current $I_o$ (mA) 100°C	Max. Fwd Voltage @ 10mA & 25°C	Max. Peak Surge Current, $I_{FSM}$ (8.3ms) (Amps)	Package Style
HX 10 M	1,000	40	10.0	3	M
HX 20 M	2,000				
HX 30 M	3,000				
HX 40 M	4,000				
HX 50 M	5,000				
HX 60 ML	6,000	20	20.0	3	M
HX 80 ML	8,000				
HX 100 ML	10,000				

EDI reserves the right to change these specifications at any time without notice.

# HV HX

## ELECTRICAL CHARACTERISTICS(at $T_A=25^\circ\text{C}$ Unless Otherwise Specified)

	HV Series	HX Series
Max. DC Reverse Current @ PRV and $25^\circ\text{C}$ , $I_R$	10nA	100nA
Max. DC Reverse Current @ PRV and $100^\circ\text{C}$ , $I_R$	$3\ \mu\text{A}$	$5\ \mu\text{A}$
Ambient Operating Temperature Range, $T_A$	-55 to $+125^\circ\text{C}$	
Storage Temperature Range, $T_{STG}$	-55 to $+150^\circ\text{C}$	

FIG.1

OUTPUT CURRENT vs AMBIENT TEMPERATURE

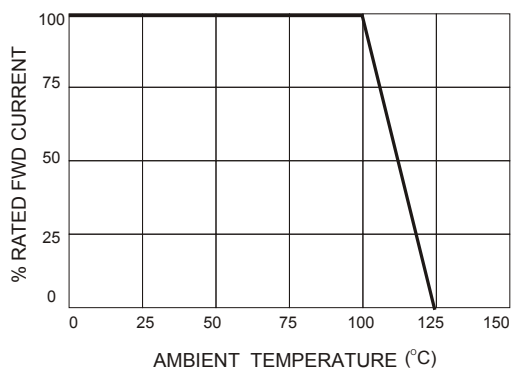


FIG.2

NON-REPETITIVE SURGE CURRENT

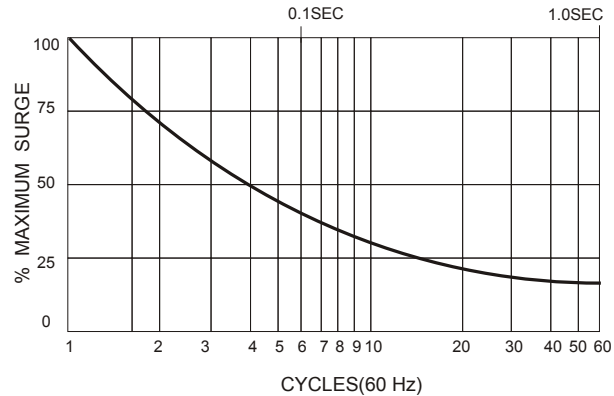


FIG.3

MECHANICAL DIMENSIONS




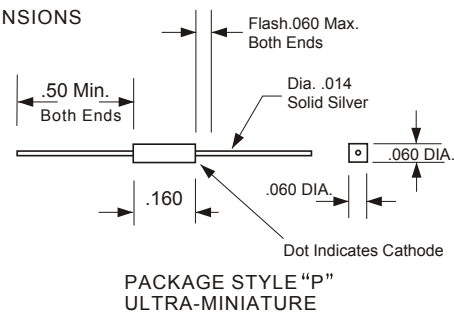


FIG.4

REVERSE RECOVERY TEST METHOD

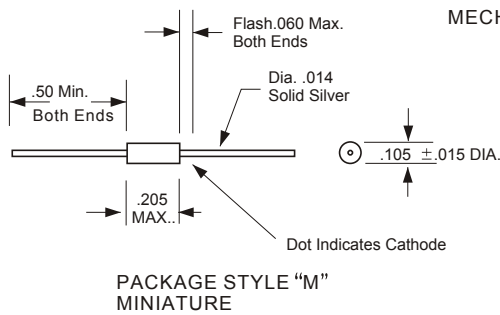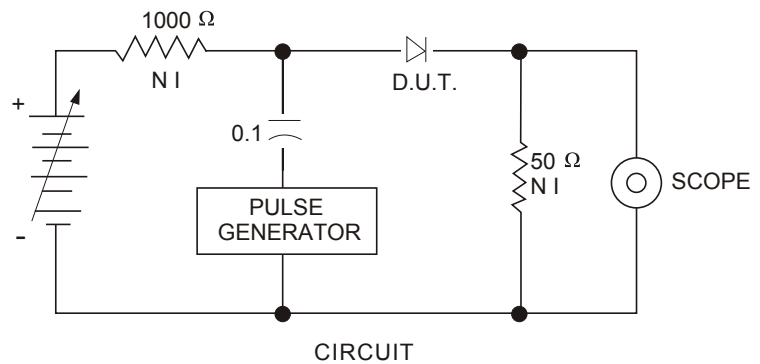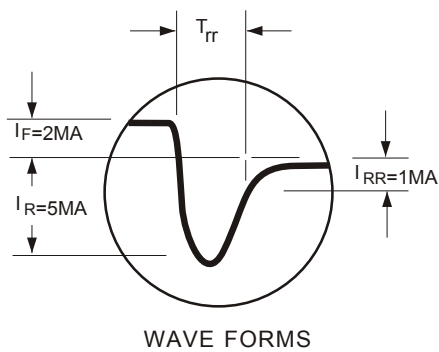

**ELECTRONIC DEVICES, INC.** DESIGNERS AND MANUFACTURERS OF SOLID STATE DEVICES SINCE 1951.

21 GRAY OAKS AVENUE \* YONKERS, NEW YORK 10710 914-965-4400 \* FAX 914-965-5531 \* 1-800-678-0828

e-mail:sales@edidiodes.com \* website: <http://www.edidiodes.com>