

High Reliability Mixer

ADE-R1MHW+

Level 13 (LO Power +13 dBm) 5 to 600 MHz




Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	200mW
IF Current	40mA


Pin Connections

LO	6
RF	3
IF	2
GROUND	1,4,5

Outline Drawing




PCB Land Pattern



Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.272	.310	.220	.100	.112	.055	.100
6.91	7.87	5.59	2.54	2.84	1.40	2.54
H	J	K	L	wt		
.030	.026	.065	.300	grams		
0.76	0.66	1.65	7.62	0.20		

Demo Board MCL P/N: TB-03 Suggested PCB Layout (PL-052)

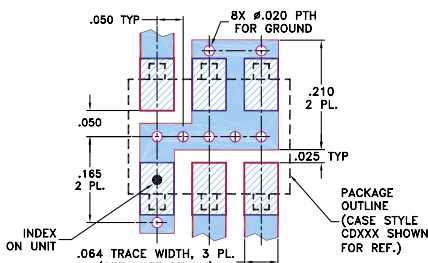

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- ▨ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- hermetically sealed ceramic quad
- low conversion loss, 5.2 dB typ.
- excellent L-R isolation, 53 dB typ.
- excellent IP3, 18 dBm typ.
- low profile package
- aqueous washable
- protected by US patent 6,133,525

Applications

- HF/VHF/UHF/ receivers

Electrical Specifications

FREQUENCY (MHz)	CONVERSION LOSS (dB)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)			IP3 at center band (dBm)										
		L	M	U	L	M	U											
LO/RF f_L - f_U	Mid-Band m \bar{X} σ Max. Total Range Max.	Typ. Min.	Typ. Min.	Typ. Min.	Typ. Min.	Typ. Min.	Typ. Min.	Typ.										
5-600	DC-600	5.2	0.10	6.9	8.0	63	50	53	35	43	27	56	40	44	28	30	20	18


1 dB COMP.: +9 dBm typ.

L = low range [f_L to $10 f_L$] M = mid range [$10 f_L$ to $f_U/2$] U = upper range [$f_U/2$ to f_U]
m = mid band [$2f_L$ to $f_U/2$]

Typical Performance Data

Frequency (MHz)	Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)	
						LO +13dBm
RF	LO	LO +13dBm	LO +13dBm	LO +13dBm	LO +13dBm	
3.25	33.25	5.66	61.47	53.84	1.36	2.37
5.50	35.50	5.38	60.99	53.36	1.23	2.39
7.75	37.75	5.28	60.52	52.86	1.17	2.39
10.00	40.00	5.22	60.02	52.39	1.14	2.37
12.00	42.00	5.20	59.77	51.99	1.12	2.39
27.00	57.00	5.20	57.23	49.41	1.07	2.40
42.00	72.00	5.19	55.28	47.25	1.05	2.37
57.00	87.00	5.18	53.83	45.41	1.03	2.33
102.00	132.00	5.18	51.52	42.92	1.04	2.37
155.00	185.00	5.20	48.58	40.94	1.04	2.35
205.00	235.00	5.27	47.97	39.72	1.06	2.51
255.00	285.00	5.30	44.90	37.91	1.08	2.43
303.75	333.75	5.35	44.64	36.96	1.11	2.70
351.25	381.25	5.46	42.61	34.91	1.12	2.48
398.75	428.75	5.41	40.40	32.47	1.18	2.84
446.25	476.25	5.55	38.26	30.77	1.21	2.62
480.00	510.00	5.58	37.54	30.22	1.23	3.06
500.00	530.00	5.66	37.42	30.16	1.24	2.97
550.00	580.00	5.66	36.13	28.38	1.28	2.70
600.00	630.00	5.54	35.82	27.39	1.30	2.79

Electrical Schematic

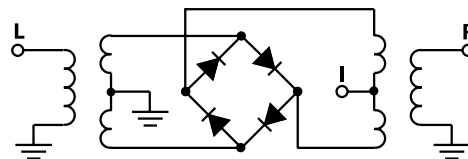

Mini-Circuits
ISO 9001 ISO 14001 CERTIFIED

ALL NEW
minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

REV. OR
M109914
ADE-R1MHW+
ED-12874/2
WL/TD/QL
070516

