SPECIFICATIONS				
PARAMETERS	VALUES	UNITS	1	
DIRECTIVITY	OMNI	-	1	
SENSITIVTY	-44 ± 3	dB]	
STANDARD OPERATING VOLTAGE	1.5	Vdc]	
MAX OPERATING VOLTAGE	10	Vdc]	
CURRENT CONSUMPTION (MAX)	0.5	mA]	
IMPEDANCE	2.2	KOhm]	
SIGNAL TO NOISE RATIO (MIN.)	60	dB]	
TERMINAL	PIN	-	1	
INTERNAL CAPACITOR	N/A	pF]	

NOTES:

WITHOUT NOTICE.

1. ALL DIMENSIONS ARE IN MILLIMETERS.

3. THIS PART IS RoHS 2002/95/EC COMPLIANT.

2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWL

THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. 15 PROHIBITED.

©2003, Projects Unlimited Inc.

REVISION HISTORY				
LTR	DESCRIPTION	DATE	APPROVED	
-	RELEASED FROM ENGINEERING	1/30/2006		
Α	REVISED TO INVENTOR 3-D DRAWING TEMPLATE	9/8/2010	B.R.	
В	ADDED PIN DIMENSIONS	11/8/2010	C.W.	

Checked by

E.P.

Designed by

SIZE

Date

1/30/2006

Approved by

B.R.

Microphone

AOM-4544P-NF-R

Date


1/30/2006 9/8/2010

Drawn Date

1/1

Date

1/30/2006

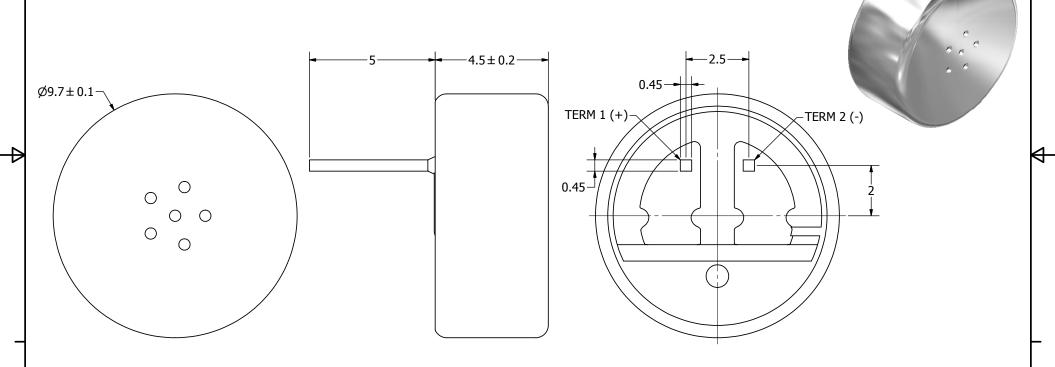

UNLESS OTHERWISE

SPECIFIED:

DIMENSIONS ARE IN

MILLIMETERS,

TOLERANCES ARE ±0.5 AND ANGLES ARE ±3°.

AOM-4544P-NF-R.idw

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

PUI Audio: AOM-4544P-NF-R