


Number of contacts

92 +

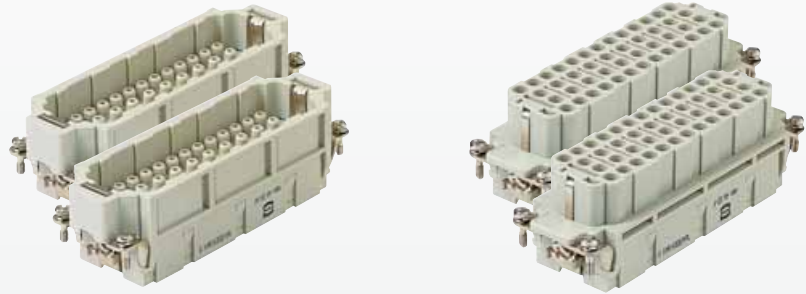

Inserts

Han E/EE

Identification	Series	Part No.		Drawing	Dimensions in mm
		Male insert (M)	Female insert (F)		
Crimp terminal Order contacts separately	Han® EE			Dimensions for inserts see page 03.27	
	1-46 47-92	<b>09 32 046 3001</b> 09 32 046 3011	<b>09 32 046 3101</b> 09 32 046 3111	Contact arrangement View from termination side 	
				Panel cut out for inserts for use without hoods/housings 	

Identification	Wire gauge (mm²)	Part No.		Drawing	Dimensions in mm																											
		Male contacts	Female contacts																													
Crimp contacts				Operation contact Identification 	Relay contact 																											
Power contacts	0.14-0.37 0.5 0.75 1.0 1.5 2.5 3 4	<b>09 33 000 6127*</b> <b>09 33 000 6121</b> <b>09 33 000 6114</b> <b>09 33 000 6105</b> <b>09 33 000 6104</b> <b>09 33 000 6102</b> <b>09 33 000 6106</b> <b>09 33 000 6107</b>	<b>09 33 000 6227*</b> <b>09 33 000 6220</b> <b>09 33 000 6214</b> <b>09 33 000 6205</b> <b>09 33 000 6204</b> <b>09 33 000 6202</b> <b>09 33 000 6206</b> <b>09 33 000 6207</b>																													
silver plated																																
gold plated	0.14-0.37 0.5 0.75 1.0 1.5 2.5 4.0	<b>09 33 000 6117*</b> <b>09 33 000 6122</b> <b>09 33 000 6115</b> <b>09 33 000 6118</b> <b>09 33 000 6116</b> <b>09 33 000 6123</b> <b>09 33 000 6119</b>	<b>09 33 000 6217*</b> <b>09 33 000 6222</b> <b>09 33 000 6215</b> <b>09 33 000 6218</b> <b>09 33 000 6216</b> <b>09 33 000 6223</b> <b>09 33 000 6221</b>	<table border="1"> <thead> <tr> <th>Identification</th> <th>Wire gauge</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>no groove</td> <td>0.14-0.37 mm²</td> <td>AWG 26-22</td> </tr> <tr> <td>no groove</td> <td>0.5 mm²</td> <td>AWG 20</td> </tr> <tr> <td>1 groove*</td> <td>0.75 mm²</td> <td>AWG 18</td> </tr> <tr> <td>1 groove</td> <td>1 mm²</td> <td>AWG 18</td> </tr> <tr> <td>2 grooves</td> <td>1.5 mm²</td> <td>AWG 16</td> </tr> <tr> <td>3 grooves</td> <td>2.5 mm²</td> <td>AWG 14</td> </tr> <tr> <td>wide groove</td> <td>3.0 mm²</td> <td>AWG 12</td> </tr> <tr> <td>no groove</td> <td>4 mm²</td> <td>AWG 12</td> </tr> </tbody> </table>	Identification	Wire gauge	Stripping length	no groove	0.14-0.37 mm²	AWG 26-22	no groove	0.5 mm²	AWG 20	1 groove*	0.75 mm²	AWG 18	1 groove	1 mm²	AWG 18	2 grooves	1.5 mm²	AWG 16	3 grooves	2.5 mm²	AWG 14	wide groove	3.0 mm²	AWG 12	no groove	4 mm²	AWG 12	
Identification	Wire gauge	Stripping length																														
no groove	0.14-0.37 mm²	AWG 26-22																														
no groove	0.5 mm²	AWG 20																														
1 groove*	0.75 mm²	AWG 18																														
1 groove	1 mm²	AWG 18																														
2 grooves	1.5 mm²	AWG 16																														
3 grooves	2.5 mm²	AWG 14																														
wide groove	3.0 mm²	AWG 12																														
no groove	4 mm²	AWG 12																														

Coding Pin			<b>09 33 000 9954</b>	To avoid accidental incorrect mating of adjacent connectors a coding system is required. Coding is effected – by means of a code pin. For this reason a female contact has to be inserted into the selected chamber. The code pin has to be assembled into this contact from the mating side. The opposite male contact is omitted.
------------	--	--	-----------------------	---

FOC contacts for 1 mm plastic fibre		20 10 001 3311	<b>20 10 001 3321</b>	
-------------------------------------	--	----------------	-----------------------	--

\* only to be used with BUCHANAN crimping tool 09 99 000 0001 and adjustment gauge 09 99 000 0203