

Number of contacts

3 +

+ 2 additional contacts for safe high voltage connections



Inserts

Han Hv E


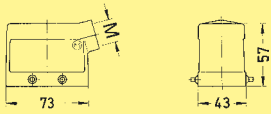

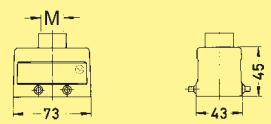
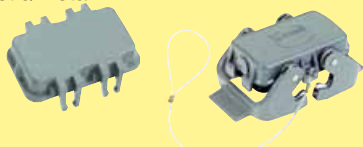
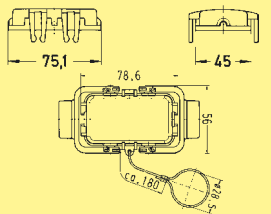

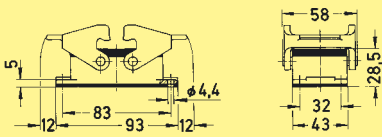

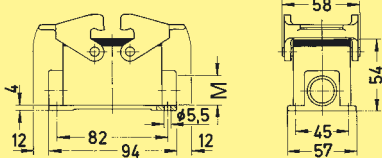
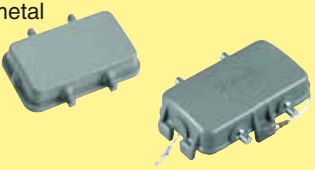
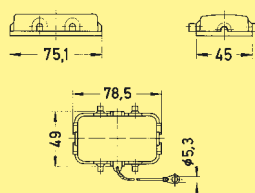

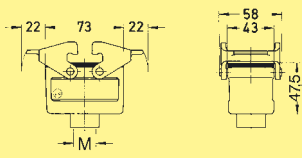


Identification	Series	Part No.		Drawing	Dimensions in mm
		Male insert (M)	Female insert (F)		
<p>Screw terminal</p>	Han Hv E®	<b>09 34 003 2601</b>	<b>09 34 003 2701</b>	<p>1) Distance for contact max. 21 mm</p> <p>Contact arrangement View from termination side</p> <p>Han® 3 Hv E</p> <p>M F</p> <ul style="list-style-type: none"> <li>● Operating contact</li> <li>○ Relay contact</li> <li>○ Without contact</li> </ul> <p>Panel cut out for inserts for use without hoods/housings</p>	
<p>Crimp terminal</p> <p>Order contacts separately</p> <p>Han Hv E® Crimp could also be used with a 10 B standard housing.</p>	Han Hv E®	<b>09 34 003 2602</b>	<b>09 34 003 2702</b>		

Identification	Wire gauge (mm²)	Part No.		Drawing	Dimensions in mm																															
		Male contacts	Female contacts																																	
<p>Han 3 Hv E</p> <p>Crimp contacts</p> <p>Operating contact silver plated</p> <p>3 x </p> <p>5 x </p> <p>Relay contact silver plated</p> <p>2 x </p>	<p>0.5</p> <p>0.75</p> <p>1.0</p> <p>1.5</p> <p>2.5</p> <p>3</p> <p>4</p> <p>0.75-1</p> <p>1.5</p> <p>2.5</p>	<p><b>09 33 000 6121</b></p> <p><b>09 33 000 6114</b></p> <p><b>09 33 000 6105</b></p> <p><b>09 33 000 6104</b></p> <p><b>09 33 000 6102</b></p> <p><b>09 33 000 6106</b></p> <p><b>09 33 000 6107</b></p> <p><b>09 33 000 6109</b></p> <p><b>09 33 000 6110</b></p> <p><b>09 33 000 6111</b></p>	<p><b>09 33 000 6220</b></p> <p><b>09 33 000 6214</b></p> <p><b>09 33 000 6205</b></p> <p><b>09 33 000 6204</b></p> <p><b>09 33 000 6202</b></p> <p><b>09 33 000 6206</b></p> <p><b>09 33 000 6207</b></p>	<p>Operating contact Identification</p> <p>Relay contact</p> <p>Crimp contact identification</p> <table border="1"> <thead> <tr> <th>Identification</th> <th>Wire gauge</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>no groove</td> <td>0.5 mm²</td> <td>AWG 20</td> <td>7.5 mm</td> </tr> <tr> <td>1 groove*</td> <td>0.75 mm²</td> <td>AWG 18</td> <td>7.5 mm</td> </tr> <tr> <td>1 groove</td> <td>1 mm²</td> <td>AWG 18</td> <td>7.5 mm</td> </tr> <tr> <td>2 grooves</td> <td>1.5 mm²</td> <td>AWG 16</td> <td>7.5 mm</td> </tr> <tr> <td>3 grooves</td> <td>2.5 mm²</td> <td>AWG 14</td> <td>7.5 mm</td> </tr> <tr> <td>wide groove</td> <td>3.0 mm²</td> <td>AWG 12</td> <td>7.5 mm</td> </tr> <tr> <td>no groove</td> <td>4 mm²</td> <td>AWG 12</td> <td>7.5 mm</td> </tr> </tbody> </table> <p>* on the back crimp collar</p>	Identification	Wire gauge	Stripping length	no groove	0.5 mm²	AWG 20	7.5 mm	1 groove*	0.75 mm²	AWG 18	7.5 mm	1 groove	1 mm²	AWG 18	7.5 mm	2 grooves	1.5 mm²	AWG 16	7.5 mm	3 grooves	2.5 mm²	AWG 14	7.5 mm	wide groove	3.0 mm²	AWG 12	7.5 mm	no groove	4 mm²	AWG 12	7.5 mm	
Identification	Wire gauge	Stripping length																																		
no groove	0.5 mm²	AWG 20	7.5 mm																																	
1 groove*	0.75 mm²	AWG 18	7.5 mm																																	
1 groove	1 mm²	AWG 18	7.5 mm																																	
2 grooves	1.5 mm²	AWG 16	7.5 mm																																	
3 grooves	2.5 mm²	AWG 14	7.5 mm																																	
wide groove	3.0 mm²	AWG 12	7.5 mm																																	
no groove	4 mm²	AWG 12	7.5 mm																																	

04  
14

Number of pieces per insert

Stock items in bold type

Identification		Part No.	M	Drawing	Dimensions in mm
Hoods	Hood side-entry 	19 34 003 0520	20		
	Hood top-entry 	19 34 003 0420 19 34 003 0421	20 25		
	Protection covers thermoplastic/metal 	09 30 010 5401 09 30 010 5423			
Housings	Housing bulkhead mounting 	09 34 003 0301	—	Panel cut out 60 x 35 mm 	
	Housing surface mounting 2 side-entries 	19 34 003 0270	20		
	Protection covers thermoplastic/metal 	09 30 010 5407 09 30 010 5425			
	Hood cable to cable 	19 34 003 0730 19 34 003 0731	20 25		
	Protection cover metal 	09 30 010 5427			

Han Hv E