



**5.08mm (.200") Pitch
Beau Eurostyle®
PCB Header**

FEATURES AND SPECIFICATIONS

Features and Benefits

- 2 to 24 circuits
- Industry-standard interface
- High flammability rating

Electrical

Voltage: 300V
Maximum Current: 15 Amp
Insulation Resistance: >5,000 Megaohms


Mechanical

Operating Temperature: 110°C

Physical

Housing: Nylon 6/6, UL94 V-0, black
Header Pins: Brass
Header Pin Plating: Tin

**39860, 39861
Stackable**

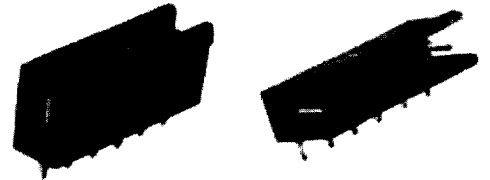


86 Series

Reference Information

UL: File No. E48521
Guide No. XCFR2
CSA: File No. 025562

CATALOG DRAWING (FOR REFERENCE ONLY)

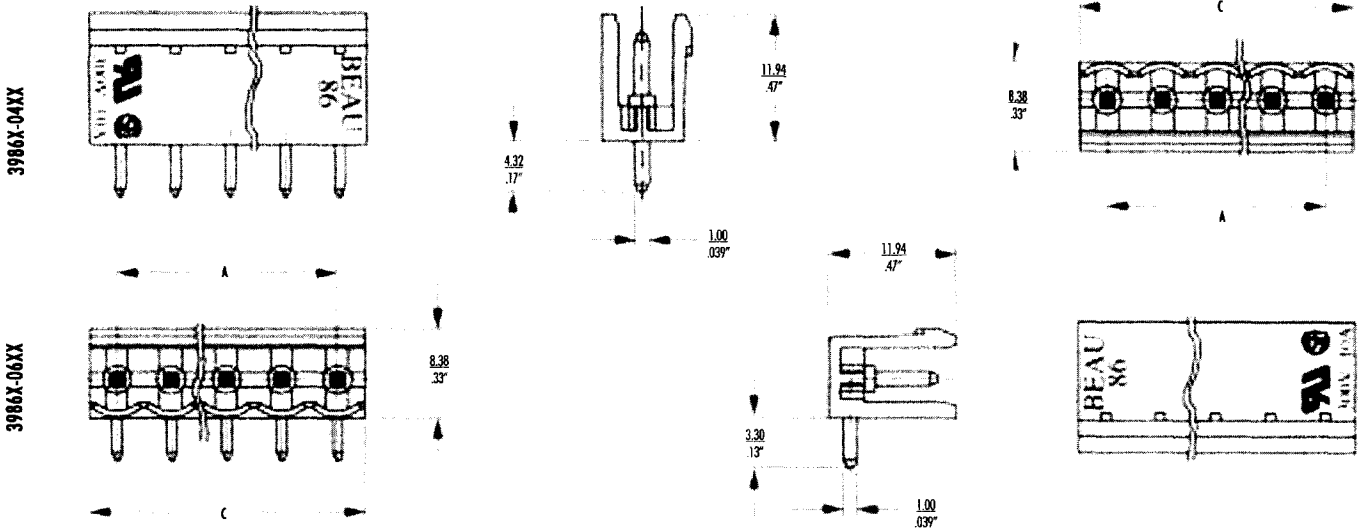

ORDERING INFORMATION AND DIMENSIONS

Order # (Engineering #) Replace XX with # of circuits, 02-24									
Vertical					Right Angle				
Tin Plated 39860-04XX (8615XX)		Gold Plated 39861-04XX (8615XX-G30)			Tin Plated 39860-06XX (8618XX)		Gold Plated 39861-06XX (8618XX-G30)		
# of Circuits	A		C		# of Circuits	A		C	
	in	mm	in	mm		in	mm	in	mm
2	.20	5.1	.39	10.0	14	2.60	66.0	2.79	71.0
3	.40	10.2	.59	15.1	15	2.80	71.1	2.99	76.1
4	.60	15.2	.79	20.2	16	3.00	76.2	3.19	81.2
5	.80	20.3	.99	25.3	17	3.20	81.3	3.39	86.2
6	1.00	25.4	1.19	30.4	18	3.40	86.4	3.59	91.3
7	1.20	30.5	1.39	35.4	19	3.60	91.4	3.79	96.4
8	1.40	35.6	1.59	40.5	20	3.80	96.5	3.99	101.5
9	1.60	40.6	1.79	45.6	21	4.00	101.6	4.19	106.6
10	1.80	45.7	1.99	50.7	22	4.20	106.7	4.39	111.6
11	2.00	50.8	2.19	55.8	23	4.40	111.8	4.59	116.7
12	2.20	55.9	2.39	60.8	24	4.60	116.8	4.79	121.8
13	2.40	61.0	2.59	65.9					

*Consult factory for imprinting and other options