
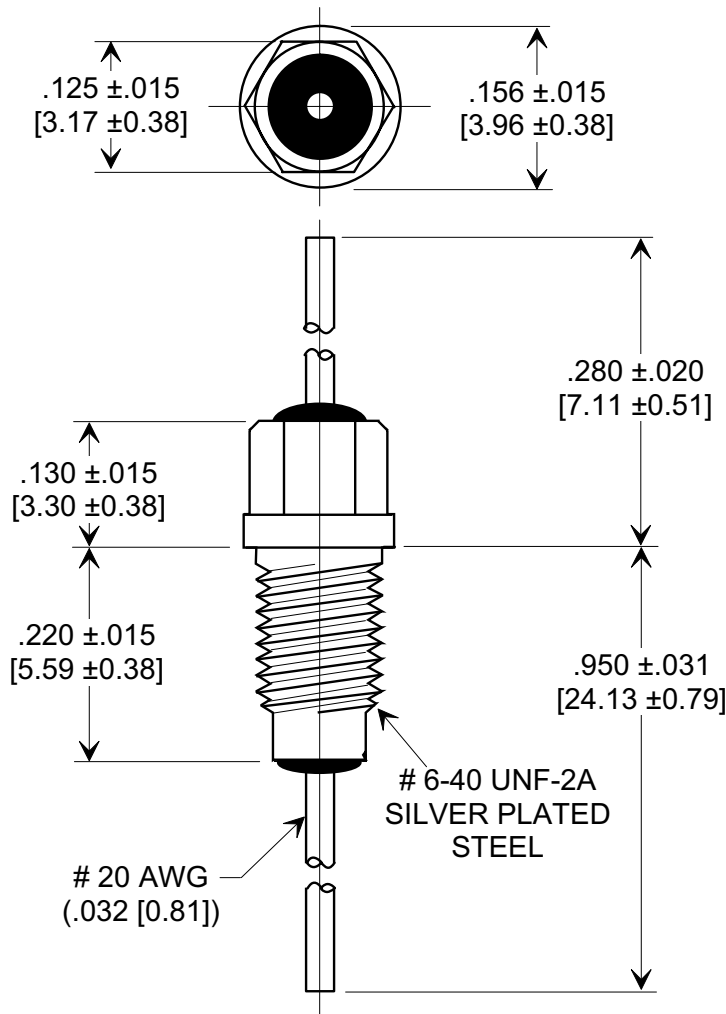


Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.

MARKETING SALES DRAWING
DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []



NOTES:

- TUSONIX STANDARD PART NUMBER: 4200-004.
TUSONIX RoHS COMPLIANT PART NUMBER: 4200-004 LF.
CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER WHEN ORDERING.
- LEAD FINISH: SILVER PLATE.
- PART MARKING: TRADEMARK AND VARIATION NUMBER ON HEX FLATS.
STANDARD PART: BLACK INK. RoHS PART: GREEN INK.
- MAX RECOMMENDED MOUNTING TORQUE: 1.5 LB-IN
WITHOUT MOUNTING HARDWARE, INSTALLED IN THREADED HOLE.
- MAX RECOMMENDED SOLDERING TEMPERATURE; 260°C SEE
INSTALLATION RECOMMENDATIONS.

MIN. CAP. pF	DC WORKING VOLTAGE		DC CURRENT (AMPS)	I.R. MIN. @ 100 (VDC.)	DWV (VDC)	MINIMUM NO LOAD INSERTION LOSS (dB) AT 25°C PER MIL-STD-220			
	85°C	125°C				10MHz	100MHz	1GHz	10GHz
3000	300	200	10	10 G Ω	900	8	50	70	70

X-2015 Rev-0	REVISION RECORD		Original Release C.O. 960321-3 ADDED & REVISED NOTES. ADDED METRIC, DWV & I.R. S.M. 11-10-05 20051027-1-03	--TOLERANCES-- Unless Otherwise Specified		Title		
	0	1		DECIMAL ±	BUSHING STYLE EMI FILTER			
				ANGLES ±	Drawn	S.M. 03-27-96	Scale	None
				TUSONIX TUCSON, ARIZONA	Approved	T.C. 03-27-96		A