
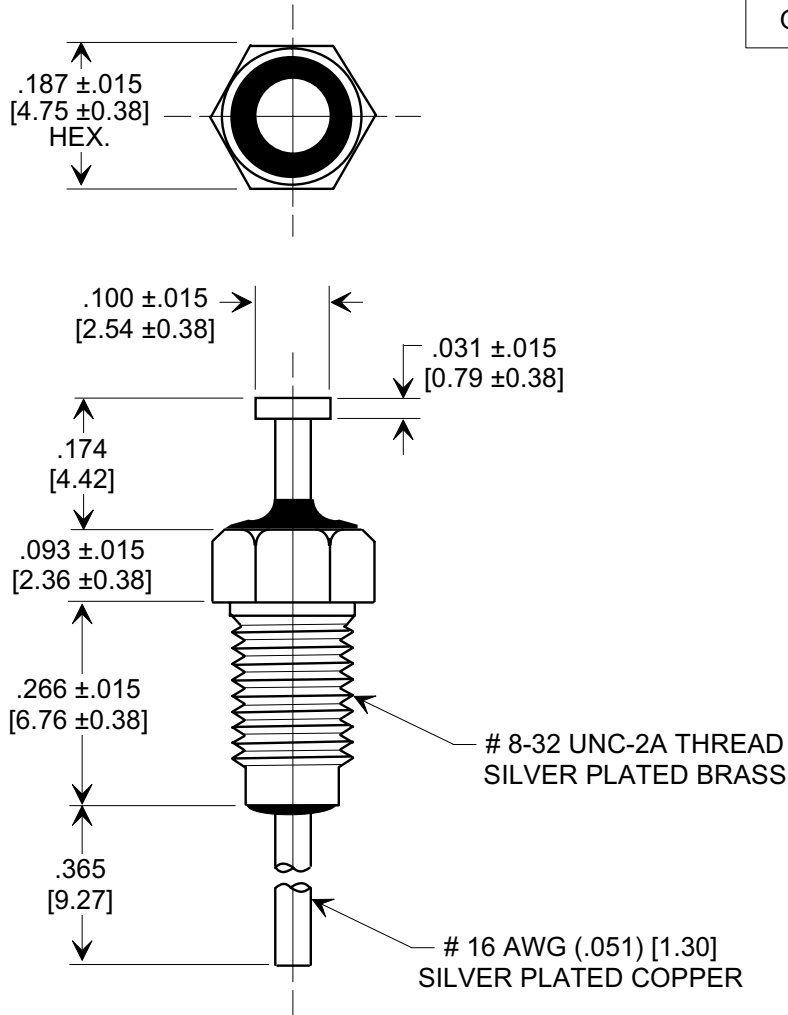



MARKETING SALES DRAWING

DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []

Electrical Testing
 per Tusonix standard
 test plans and Mil-Std-202
 Test Methods.



- NOTE:
- # 8 - 32 - 2B TH"D
HEX NUT SUPPLIED.
 - TUSONIX STANDARD PART
NUMBER: 2425-003-X7U0-102P.
TUSONIX RoHS COMPLIANT PART
NUMBER: 2425-003-X7U0-102P LF.
CUSTOMER MUST SPECIFY STANDARD
OR RoHS PART NUMBER WHEN
ORDERING.
 - PART MARKING: STANDARD: BLACK
INK FOR TRADEMARK AND CAP. CODE.
RoHS PART: GREEN FOR TRADEMARK
AND CAP. CODE.

SPECIFICATIONS

Capacitance Value:	1000 pF
Capacitance Tolerance:	GMV
Temp. Characteristic:	X7U
Rating:	100 VDC @ + 125°C
Operating Range:	-55°C TO +125°C
I.R. MIN. @ 100 (VDC.)	10 G
DWV	600 VDC

REVISION RECORD Original Release C.O. 20050413-3-04	0	TUSONIX TUCSON, ARIZONA	--TOLERANCES-- Unless Otherwise Specified	Title MINIATURE BUSHING FEED-THRU	
			DECIMAL ± .031 [0.79]	Drawn S.M. 04-18-05	
			ANGLES ±	Approved R.C. 04-18-05	
			A	2425-003-X7U0-102P	