

LTCC

High Temperature Inductors

0.2x0.2 inch (5x5 mm)



NASCENTechnology, Inc. has developed a series of high temperature, RoHS compliant inductors using low temperature co-fired ceramic (LTCC) ferrite usable to 300°C that feature low profile, rugged packaging, and self shielding characteristics.


Electrical Parameters at 25 °C unless otherwise noted

Part No.	No Load Inductance [†] μH	100 mA Inductance μH	100 mA Tolerance	Nominal DC Resistance ohms	Rated Current ^{††} mA	Saturation Current* mA
85071	3.7	3.1	25 %	0.14	-	275
85068	9.7	7.5	25%	0.2	-	250
85074	12	6.6	25 %	0.18	-	250
85072	15	13	25 %	0.7	-	250
85075	32	24	25 %	0.9	-	200
85069	37	29	25 %	1	-	250
85073	38	27	25 %	2	-	200
85076	71	48	25 %	2.5	-	200
85070	87	57	25 %	2.9	-	225


[†] Tolerance for no load inductance is ±25 %

^{††} Current will cause a 35 °C temperature rise over ambient (measured 20 to 55 °C)

* Saturation Current is the current that results in a 35% decrease in inductance over the 100 mA Inductance.

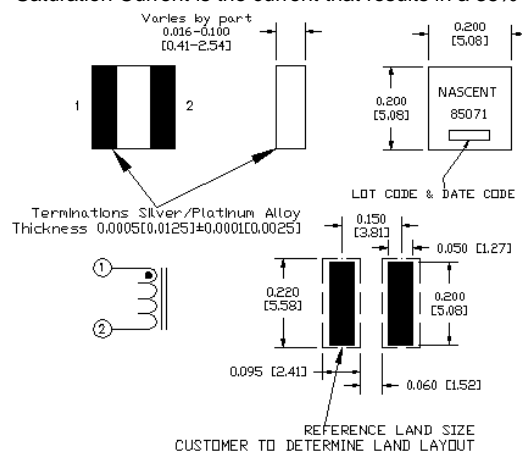

Part dimension units: inches [millimeters]

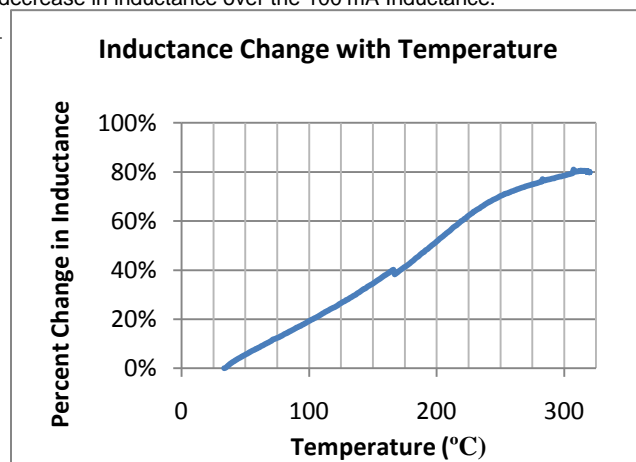

For additional information, contact: Brian Nelson, National Sales Manager
 Phone: 605-878-2417, Fax: 605-884-2450, E-mail: bnelson@nascenttechnology.com
 NASCENTechnology, Inc. 121 Airport Drive, Watertown, SD 57201
www.nascenttechnology.com