


**VICOR CONFIDENTIAL**

THIS DOCUMENT AND THE DATA DISCLOSED  
HEREIN OR HEREWITH IS NOT TO BE REPRODUCED,  
USED, OR DISCLOSED IN WHOLE OR IN PART  
TO ANYONE WITHOUT PERMISSION OF VICOR CORP.

REV.	DESCRIPTION	DATE	APPROVED
02	RELEASED PER ECO 2321	JC	1/15/91
03	REDRAWN AND REVISED PER E980221	PEI	7/2/98

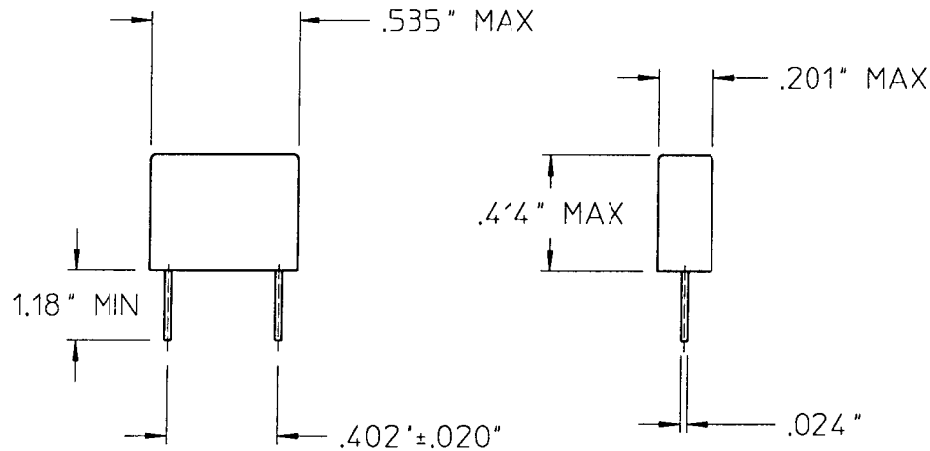

**ORIGINAL  
ONLY WHEN STAMPED  
IN RED**

<b>ELECTRICAL SPECIFICATIONS</b>	
RATED VOLTAGE	250 VAC
CAPACITANCE	4700 pF
CAPACITANCE TOLERANCE	±20%
CLASS	Y CLASS
DISSIPATION FACTOR	1.3% @ 1kHz
DIELECTRIC VOLTAGE	2700 VDC
INSULATION RESISTANCE @ 500VDC	≥ 12000MΩ
RECOMMENDED VOLTAGE IN DC APPLICATION	≥ 1000 VDC
TEMPERATURE RANGE	-40 TO +85°C

**NOTES:**

- APPROVALS INCLUDE SEMKO, NEMKO, DEMKCO, EI, VDE, SEV, OVE, IMQ, UL, CSA.

**COPY**

DRAWN BY		DATE	
		7/2/98	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES- TOLERANCES ARE: FRACTIONS DECIMALS ANGLES +1/64 .XX- .01 .1° .XXX- .005			
THIRD ANGLE PROJECTION			
DO NOT SCALE DRAWING			
<b>CAPACITOR - (Y)</b> <b>4700 pF ±20%, 250 VAC</b>			
SIZE	FSCM NO.	DWG NO	REV
<b>B</b>	<b>67131</b>	01000	03
SCALE	2:1	SHEET	1 OF 1