


## ABC40 SERIES 40W AC/DC

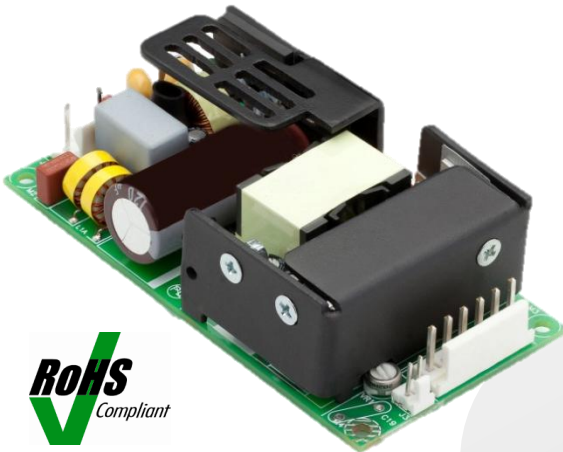

### FEATURES

- 40 W convection cooled
- -20 to 50 deg C full load operation
- 90-264 VAC input
- 2" x 4 " x 1.2" (101.6 x 50.8 x 30.48 mm)
- No minimum load required - single output models
- Conducted EMI EN 55022-B, FCC Part 15 Level B
- ITE Safety Agency Approvals
- RoHS Compliant
- No load power < 0.3 W

### APPLICATIONS

- Lighting
- Industrial Processing
- Applied Computing
- Instrumentation
- Automation Control
- Robotics
- Wireless Communications
- Test and Measurement

## TECHNICAL DATA:

### Input

PARAMETER	DESCRIPTION/CONDITION	
Input voltage range	Universal Input	90 - 264 Vac
Input frequency range	47 to 400 Hz	Note 3
Input surge current	230 Vac (cold start)	60 A max.
Safety ground leakage current	230 Vac	1000 µA max
Input current:	120 Vac @ 40 W	0.85 A rms
	230 Vac @ 40 W	0.45 A rms

### Output

PARAMETER	DESCRIPTION/CONDITION	
Voltage Adjustment	V1	± 10%
Transient Response	Main output 50 to 100% load change, 50/60 Hz, 50% duty cycle, 0.1A / µSec	< 10%, recovery time < 5 mS
Over Voltage Protection	130% Typical	V1 only
Short Circuit Protection	130% Typical	
Remote Sense	V1	0.5 Vdc compensation
Efficiency	>85%	
Set Point Tolerance	V1: ± 3%, V2 & V3: ± 5%	
Rise Time	< 100 mSec	

### Ordering Information

PRODUCT FAMILY	VOLTS (VDC)	OUTPUT CURRENT MAX (A)	MINIMUM LOAD (A) (4)	RIPPLE & NOISE	TOTAL REGULATION	OVP THRESHOLD
ABC40-1005G	5.1	8.0	0	1%	± 0.8%	130% Typical
ABC40-1012G	12	3.5	0	1%	± 0.8%	130% Typical
ABC40-1015G	15	2.7	0	1%	± 0.8%	130% Typical
ABC40-1024G	24	1.7	0	1%	± 0.8%	130% Typical
ABC40-1048G	48	0.83	0	1%	± 0.8%	130% Typical
ABC40-3000G	5.2	6.0	0.5	1%	± 0.8%	130% Typical
	12.5	2.0	0.1	1%	± 5.3%	
	-12.8	0.5	0.0	1%	± 5.3%	
ABC40-3001G	5.2	6.0	0.5	1%	± 0.8%	130% Typical
	23.8	1.0	0.1	1%	± 5.3%	
	-12.8	0.5	0.0	1%	± 5.3%	
ABC40-3002G	5.2	6.0	0.5	1%	± 0.8%	130% Typical
	14.6	1.5	0.1	1%	± 5.3%	
	-14.8	0.5	0.0	1%	± 5.3%	
ABC40-3003G	3.3	6.0	1.0	1.5%	± 0.8%	130% Typical
	5.2	3.0	0.1	1%	± 5.3%	
	-12.8	0.5	0.0	1%	± 5.3%	

**Notes:**

1. Maximum outputs for each output. Max power rating should not be exceeded.
2. Output noise measurement is made with a 20 MHz bandwidth using a 6" twisted pair, terminated with a 10 uF tantalum capacitor in parallel with a 0.1 uF ceramic capacitor.
3. Safety Approved: 47 to 63 Hz.
4. Minimum load specified to meet cross regulation.
5. Specifications are for nominal input voltage, 25°C and max load unless otherwise stated.
6. Class 1 models have Earthing tab J4. Class 2 models (-2 suffix) have no Earthing tab.
7. Ripple and Noise may be 3% at initial start-up at -20 C.
8. Specifications subject to change without notice.
9. Warranty 2 years.

**General Specifications**

PARAMETER	DESCRIPTION/CONDITION	
Hold Up Time	6 mSec	120 / 230 Vac input
MTBF	>100 khrs	MIL-HDBK-217F
Switching Frequency	67 kHz Typical	
Isolation Voltage	Input to Output: Min 4242 Vdc	Input to Ground: Min 2120 Vdc
Weight	150 g (0.33 lbs)	

**Environmental**

PARAMETER	DESCRIPTION/CONDITION	
Operating Temperature	Operating	-20 to 70°C. See derating chart below.
	Storage	-40 to +85°C.
Humidity	95%	Non Condensing
Altitude	Operating 10,000 ft.	Non-operating 40,000 ft
Conducted Emissions:	EN55022, FCC part 15- B	
Harmonic current correction:	EN61000-3-2, Class A	
Radiated Emissions	EN55011-B, FCC part 15-B	To be controlled in end system
Static Discharge	EN61000-4-2 Level 3	2, 3, 4, 5 Level 3
Conducted immunity:	EN61000-4-6	

**Safety**

PARAMETER	DESCRIPTION/CONDITION
EN / UL / CSA	EN60950-1+A12:2011, IEC60950-1 2 <sup>nd</sup> +A1 2009, CSA-22.2 No 60950-01-07+ A1, UL60950-1-2011

Figure 1 Output Power Vs. Temperature


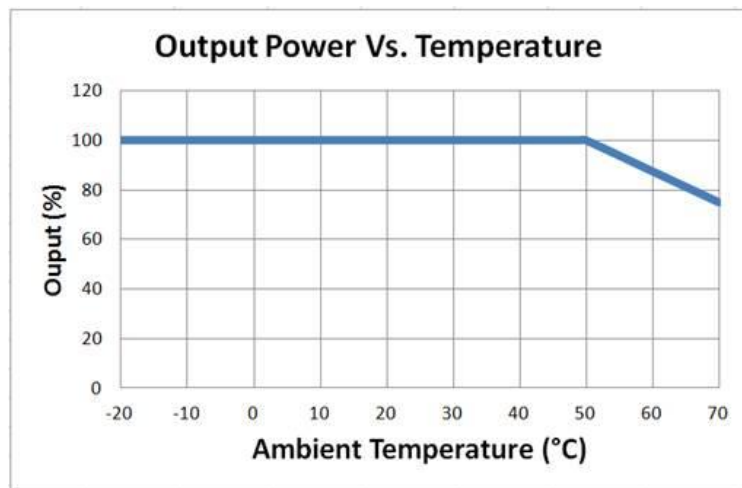


Figure 2 Dimension Drawing (Top and Side View)

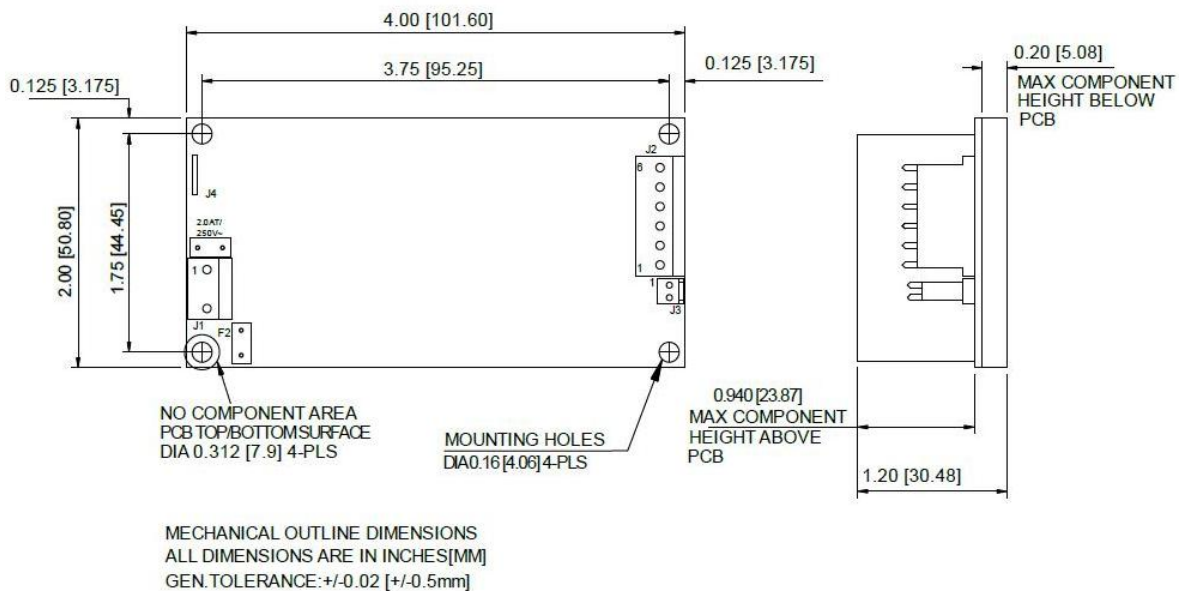

**Mechanical**

INPUT = J1	EARTHING TAB = J4	DC OUTPUT = J2		REMOTE SENSE = J3
Pin 1: AC Neutral Pin 2: Removed Pin 3: AC Line	Molex: 19705-4301	Pin 1 = V1 Pin 2 = V1 Pin 3 = RTN	Pin 4 = RTN Pin 5 = V3 Pin 6 = V2	Pin 1 = +V1 Sense Pin 2 = -V1 Sense
Mating Connector: Molex: 09-50-3031 Pins: 08-50-0106	Mating Connector: Molex: 190030001	Mating Connector: Tyco: 647402-6; Pins: 3-647409		Mating Connector: Molex: 22-01-2021

Copyright © 2010 Power-One Inc. All rights reserved. Words and logos that are identified as trademarks and/or service marks are, unless noted otherwise, the trademarks and service marks of Power-One Inc. in the U.S. and other countries. All other product or service names are the property of their respective holders. Power-One products are protected under numerous U.S. and foreign patents and pending applications, maskwork rights, and copyrights. Power-One reserves the right to make changes to any products and services at any time without notice. Power-One assumes no responsibility or liability arising out of the application or use of any information, product, or service described herein except as expressly agreed to in writing by Power-One Inc.

**NUCLEAR AND MEDICAL APPLICATIONS** - Power-One products are not designed, intended for use in, or authorized for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems without the express written consent of the respective divisional president of Power-One, Inc.

**TECHNICAL REVISIONS** - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.