

# VRM7 Shrouded Header

With Eject Latch Levers  
Dual Row, 30 Circuits


2903 Series

## APPLICATION AND FEATURES





1. Provides fast connection/disconnection of flat cable assembly (I.D.C. socket)
2. Mate with series: 2905.
3. Fully shrouded.

## SPECIFICATIONS

Current Rating: 3 Amps  
 Insulator resistance: 5000 Megohms min.  
 Dielectric withstanding: AC 500 V  
 Operating Temperature: -40° to +105°C  
 Contact Material: Brass or Phosphor bronze  
 Insulator Material: Polyester, UL 94V-0  
 ©Standard: Nylon

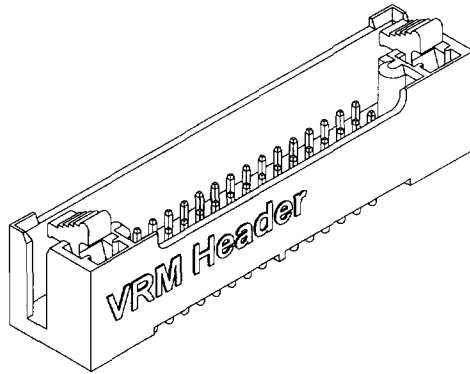

Recommended P.C.Board  
Hole Layout

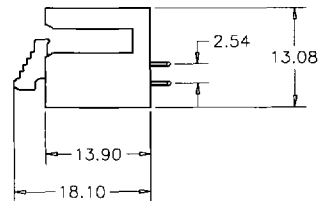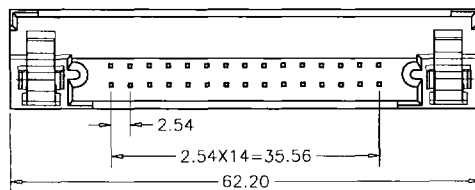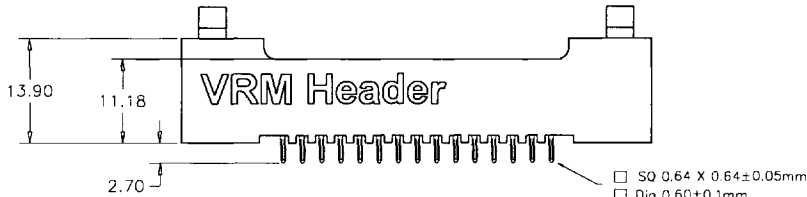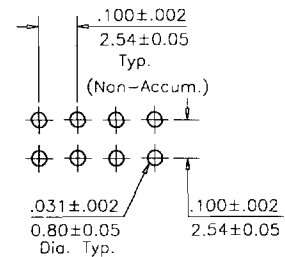

## Order Information 2903 Series

Example: 2903 - 30 - S - 02

Series No.	Number of Contacts	Connector Type	Contact Plating
2903	30	Straight S	Tin Plated 01
			Gold Plated
			Flash 02
			10 μ" 10
			30 μ" 30

SINGATRON U.S.A. Tel: (909)464-1883 Fax: (909)464-1884 Email: sales@singatron.com