


Number of contacts

# 64

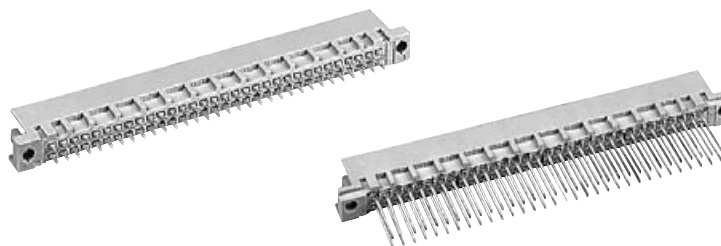

## Male connectors

DIN Signal to 2 A

Identification      Number of contacts      Contact arrangement      Part No.      Performance levels according to IEC 60 603-2. Explanation chapter 00

Identification	Number of contacts	Contact arrangement	Part No.	3	2	1
Male connector with solder pins 2.5 mm	64		09 72 164 7902		09 72 164 6902 b) 09 72 364 6902 <sup>b)</sup>	Performance level 1 on request
Male connector with solder pins 4.0 mm	64		09 72 164 7903		09 72 164 6903	
Male connector with solder pins 13 mm	64				09 72 164 6577	
Male connector with wrap posts <sup>1)</sup> 13 mm	64		09 72 164 7907		09 72 164 6907	
Male connector with wrap posts <sup>1)</sup> 17 mm	64				09 72 164 6909	

Male connector with press-in pins      Part Nos. and variants see chapter 04

**Dimensions**

a	b
2.5	ø 0.7
4	
13	□ 0.6

Solder pins

a	b
13	□ 0.6
17	□ 0.6

Wrap posts

**Panel cut out**

**Board drillings**  
Mounting side

Dimensions in mm

Other contact arrangements as well with lagging/leading pins on request  
<sup>b)</sup> Connectors with snap-in clips see chapter 00  
<sup>1)</sup> To be used only for wire wrap termination