




# AX12038 SERIES

## External Dimensions

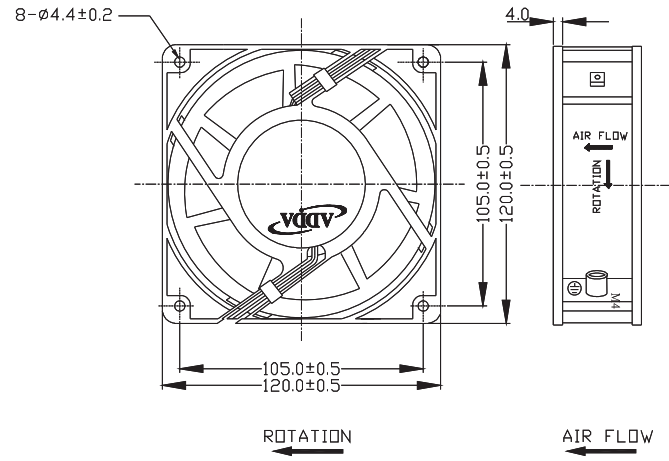

Frame: Aluminum Alloy  
 Impeller: Plastic (UL: 94V-0)  
 Motor Structure: Capacitor-Run Induction Motor.  
 Motor Protection: Thermal Protect.  
 Lead wire: UL 1430 AWG24  
 OPERATING TEMP\*: -10°C~70°C  
 \*: -10°C~60°C for fans with sleeve/ball combination bearings.

## Specifications(Nominal)


\*Noise is measured at the distance of one (1) meter from the axis of intake.

Bearing type: ◎=Ball ※=Sleeve ○=1B1S ●=Hypro bearing


Frame size (mm)	Model No.	Bearing System Type	Volt. (VAC)	Freq. (Hz)	Current (A)	Power (W)	Rated Speed (rpm)	Maximum AirFlow (CMM)	Maximum AirFlow (CFM)	Maximum Pressure (InAq)	Maximum Pressure (mmAq)	*Noise Level (dB/A)	Weight (g)
120x120x38	AX12381HB-C	◎	115	50/60	0.20/0.19	22.60/21.80	2700/3100	3.028/3.412	107.0/120.6	0.310/0.386	7.874/9.804	43.0/47.0	504
	AX12382HB-C		230		0.09/0.09	21.60/20.70							

Specifications subject to change without notice.

50Hz

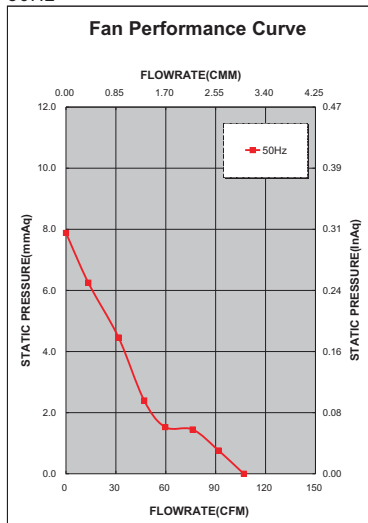

60Hz

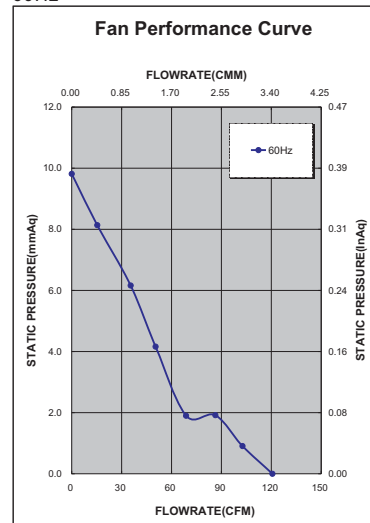

\*Safety approvals  
115V

✓	✓			

230V

✓	✓		✓	✓

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ADDA:](#)

[AX12381HB-C-LF](#)