




H2585

PNP EPITAXIAL PLANAR TRANSISTOR

Description

The H2585 is designed for use in low voltage and low drop out regulator applications.

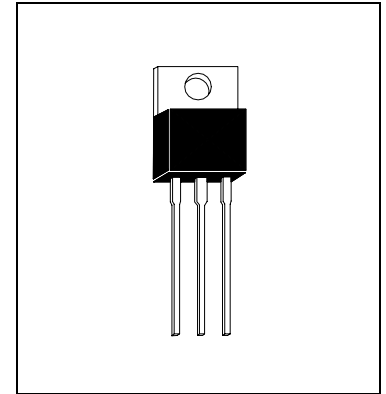

Absolute Maximum Ratings

- Maximum Temperatures
 Storage Temperature -55 ~ +150 °C
 Junction Temperature 150 °C Maximum
- Maximum Power Dissipation
 Total Power Dissipation (Tc=25°C) 40 W
- Maximum Voltages and Currents (Ta=25°C)
 VCBO Collector to Base Voltage -20 V
 VCEO Collector to Emitter Voltage -15 V
 VEBO Emitter to Base Voltage -5 V
 IC Collector Current -5 A






Characteristics (Ta=25°C)

Symbol	Min.	Typ.	Max.	Unit	Test Conditions
*BVCEO	-15	-	-	V	IC=-100mA
BVCBO	-20	-	-	V	IC=-10mA
ICBO	-	-	-10	uA	VCB=-20V
ICEO	-	-	-20	uA	VCE=-15V
IEBO	-	-	-2	mA	VEB=-5V
*VCE(sat)1	-	-	-1.5	V	IC=-3A, IB=-3mA
*VCE(sat)2	-	-	-1.5	V	IC=-5A, IB=-5mA
VBE(on)	-	-	-2	V	IC=-3A, VCE=-1.7V
*hFE1	1	-	60	K	IC=-500mA, VCE=-1.7V
*hFE2	1	-	60	K	IC=-5A, VCE=-1.7V
Cob	-	-	100	pF	VCB=-10V

*Pulse Test : Pulse Width ≤380us, Duty Cycle≤2%




Characteristics Curve

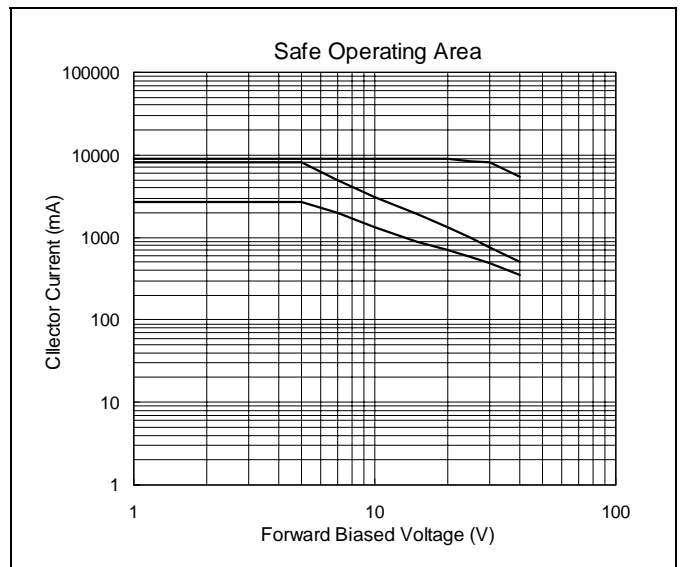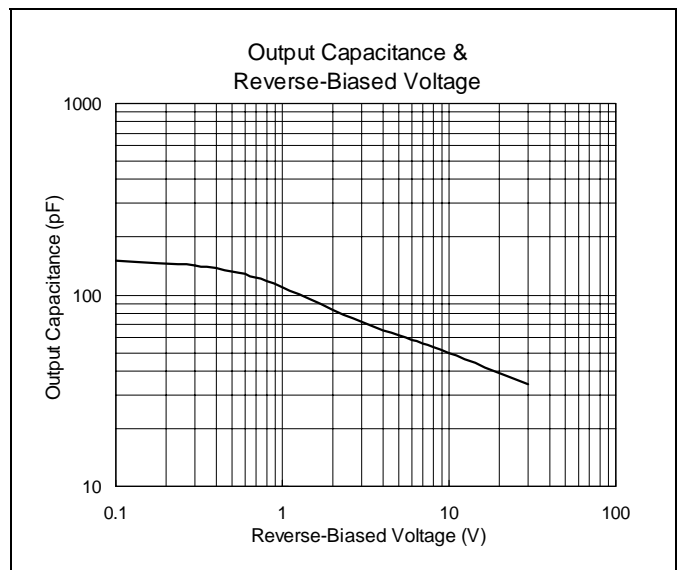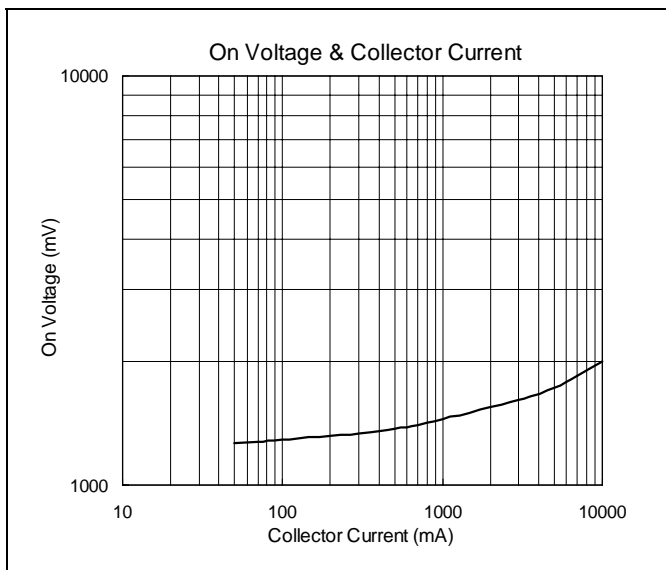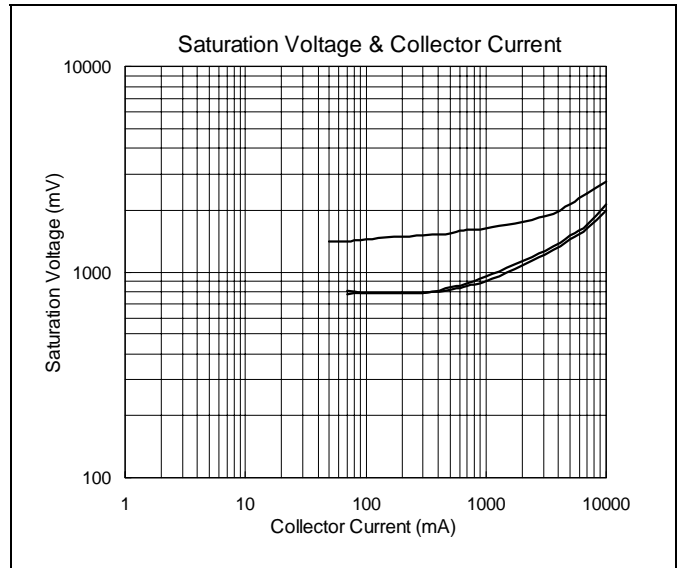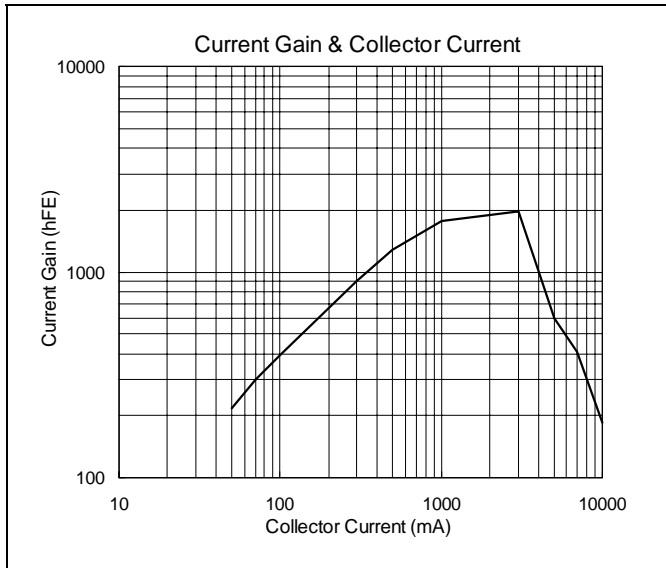



TO-220AB Dimension

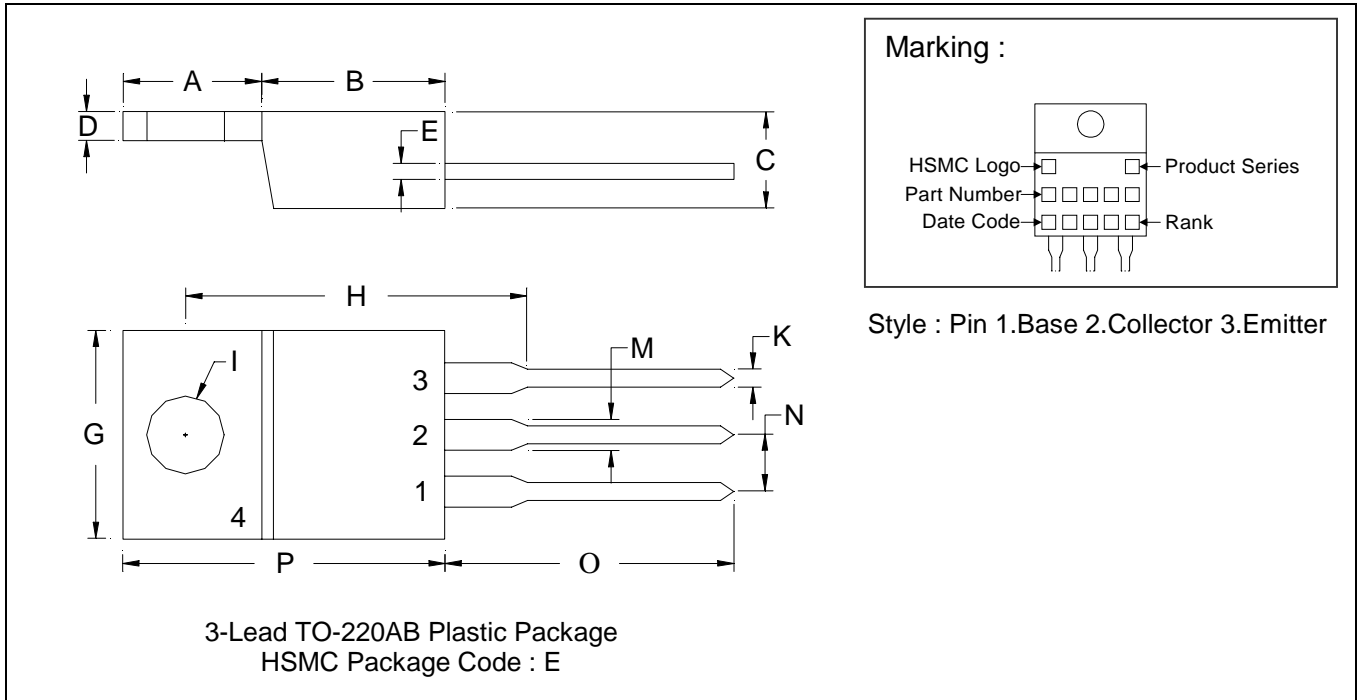

*:Typical

DIM	Inches		Millimeters		DIM	Inches		Millimeters	
	Min.	Max.	Min.	Max.		Min.	Max.	Min.	Max.
A	0.2197	0.2949	5.58	7.49	I	-	*0.1508	-	*3.83
B	0.3299	0.3504	8.38	8.90	K	0.0295	0.0374	0.75	0.95
C	0.1732	0.185	4.40	4.70	M	0.0449	0.0551	1.14	1.40
D	0.0453	0.0547	1.15	1.39	N	-	*0.1000	-	*2.54
E	0.0138	0.0236	0.35	0.60	O	0.5000	0.5618	12.70	14.27
G	0.3803	0.4047	9.66	10.28	P	0.5701	0.6248	14.48	15.87
H	-	*0.6398	-	*16.25					

- Notes :**
- 1.Dimension and tolerance based on our Spec. dated Sep. 07,1997.
 - 2.Controlling dimension : millimeters.
 - 3.Maximum lead thickness includes lead finish thickness, and minimum lead thickness is the minimum thickness of base material.
 - 4.If there is any question with packing specification or packing method, please contact your local HSMC sales office.

Material :

- Lead : 42 Alloy ; solder plating
- Mold Compound : Epoxy resin family, flammability solid burning class:UL94V-0

Important Notice:

- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of HSMC.
- HSMC reserves the right to make changes to its products without notice.
- **HSMC semiconductor products are not warranted to be suitable for use in Life-Support Applications, or systems.**
- HSMC assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.

Head Office And Factory :

- **Head Office** (Hi-Sincerity Microelectronics Corp.) : 10F.,No. 61, Sec. 2, Chung-Shan N. Rd. Taipei Taiwan R.O.C.
 Tel : 886-2-25212056 Fax : 886-2-25632712, 25368454
- **Factory 1** : No. 38, Kuang Fu S. Rd., Fu-Kou Hsin-Chu Industrial Park Hsin-Chu Taiwan. R.O.C
 Tel : 886-3-5983621~5 Fax : 886-3-5982931