



SPECIFICATIONS

PARAMETERS	VALUES	UNITS
RATED VOLTAGE	12	Vdc
OPERATING VOLTAGE RANGE	7 ~ 24	Vdc
RATED CURRENT (MAX)	350	mA
MINIMUM SPL @ 10 CM (1KHz)	100	dB
RESONANT FREQUENCY	100 ~ 6000	Hz
TONE OR PULSE RATE	REPEATING	0 pulse/sec
OPERATING TEMPERATURE	-20 ~ +60	°C
STORAGE TEMPERATURE	-30 ~ +70	°C
HOUSING MATERIAL	ABS	-
TERMINAL MATERIAL	LEAD WIRE	-
WEIGHT	30	grams

THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.
©2003, Projects Unlimited Inc.


REVISION HISTORY

LTR	DESCRIPTION	DATE	APPROVED
-	RELEASED FROM ENGINEERING	1/6/2011	

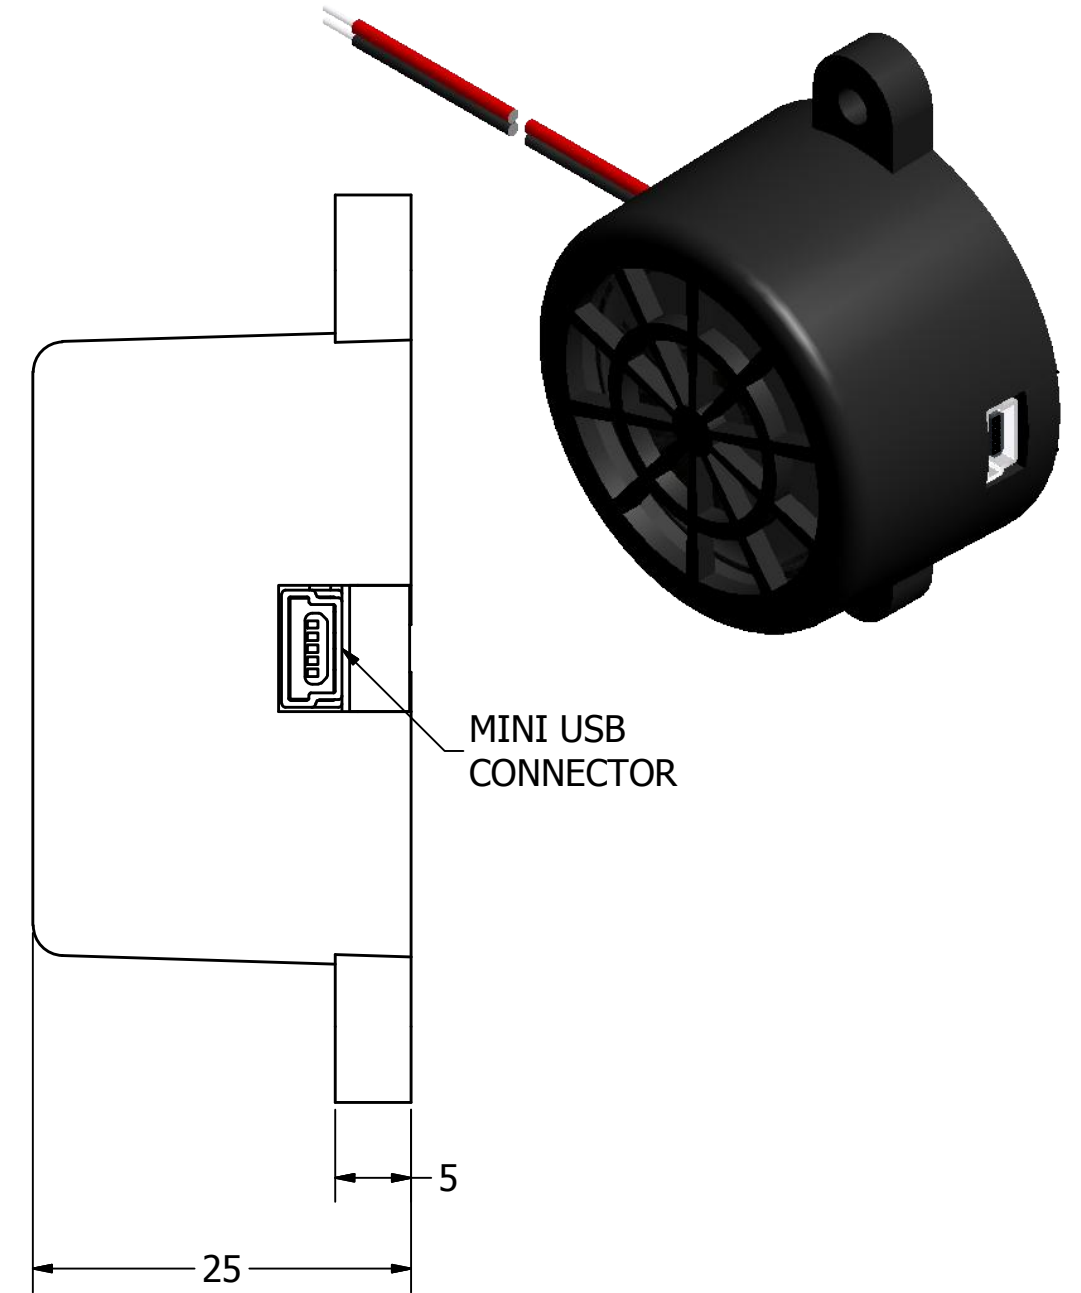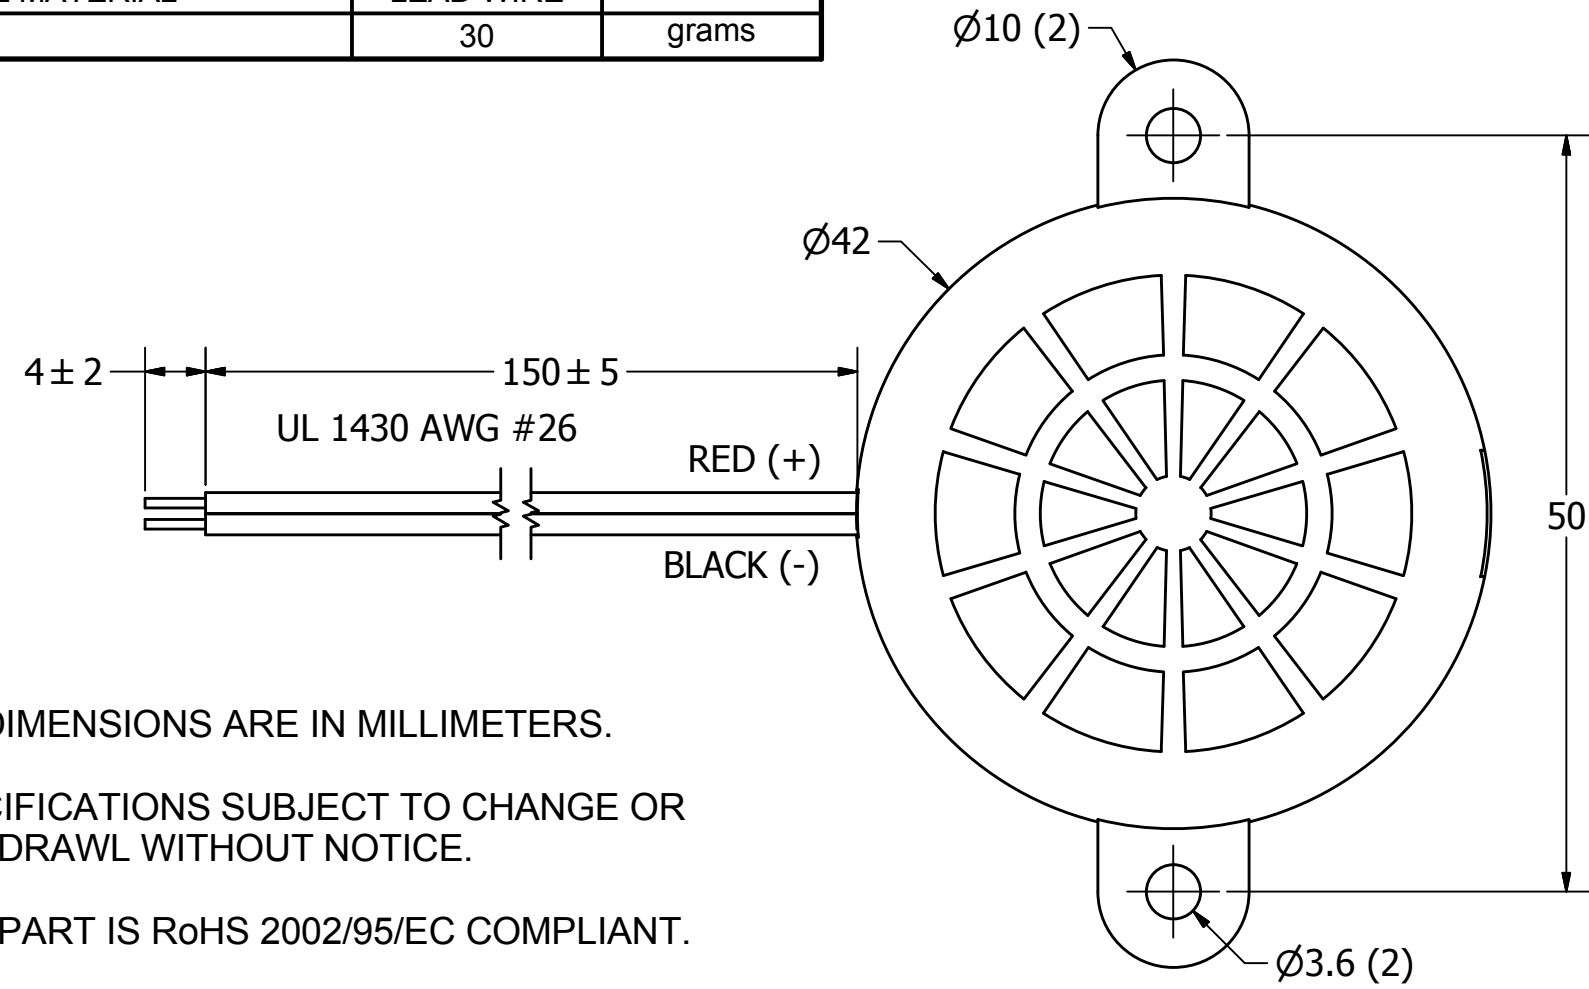

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWAL WITHOUT NOTICE.
3. THIS PART IS RoHS 2002/95/EC COMPLIANT.
4. Max. FILE LENGTH ALLOWED IS 33 sec.
5. SAMPLING RATE: 12 KHz
6. CONTINUOUS SINGLE TONES OF 2KHz AND ABOVE MAY SOUND DISTORTED DUE TO SAMPLING RATE.
7. WORKS WITH WINDOWS 2000, XP, VISTA or WIN 7.
8. OPTIONAL USB TO MINI USB CABLE: PUI PART# API-CABLE.
9. PATENT PENDING.

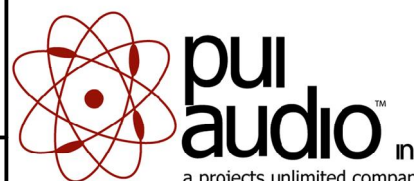UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS, TOLERANCES ARE ±0.5 AND ANGLES ARE ±3°.	SIZE A3	Designed by	Date	Checked by	Date	Approved by	Date	Drawn Date
		J.D.	1/6/2011	M.L.	3/29/2011	B.R.	3/29/2011	1/6/2011
API-4260-LW150-R.idw		 pui audio a projects unlimited company			API-4260-LW150-R			
		Indicator			Edition	Sheet		
					-	1 / 1		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[PUI Audio:](#)

[API-4260-LW150-R](#)