


Mechanical Drawing:

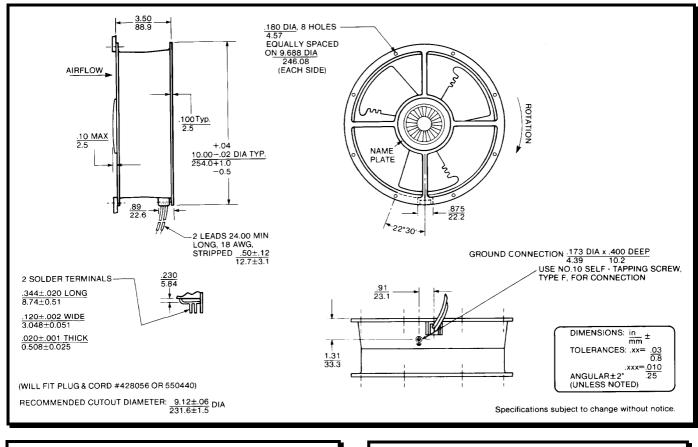

Motor:

Nominal Voltage = 115 VAC Frequency = 50 / 60 HzNominal Running Current = 1.00 / 0.88 amps Max. Locked Rotor Current = 1.60 amps **Running Power** = 67 / 61 Watts = 1400 / 1650 RPM Average Speed Bearings = Ball Air Flow = 455 / 550 CFM Acoustic: = 45.4 / 49.2 dBA

Construction:

Venturi: Aluminum, Black Propeller: Plastic, Black, UL 94V-0

Life Expectancy:

This fan is designed for continuous duty life of 54,000 hours at 40° C.

Additional Features:

Permanent Split Capacitor Motor Automatic Reset Thermal Protector Class A Insulation Feathered Edge Propeller Operating Temperature: -30°C to 60°C Storage Temperature: -40°C to 85°C

Termination: 2 solder terminals

Agency Approvals: UL, CE