



CHENMKO ENTERPRISE CO.,LTD

SURFACE MOUNT GLASS PASSIVATED HIGH EFFICIENCY SILICON RECTIFIER

VOLTAGE RANGE 50 - 1000 Volts CURRENT 2.0 Amperes

**HSM21PT
THRU
HSM28PT**

Lead free devices

FEATURES

- * For surface mounted applications
- * Low forward voltage, high current capability
- * Low leakage current
- * Metallurgically bonded construction
- * Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- * Glass passivated junction
- * High temperature soldering guaranteed : 260°C/10 seconds at terminals

MECHANICAL DATA


Case: JEDEC SMA molded plastic
Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
Polarity: Indicated by cathode band
Weight: 0.002 ounces, 0.064 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
 Single phase, half wave, 60 Hz, resistive or inductive load.
 For capacitive load, derate current by 20%.



SMA

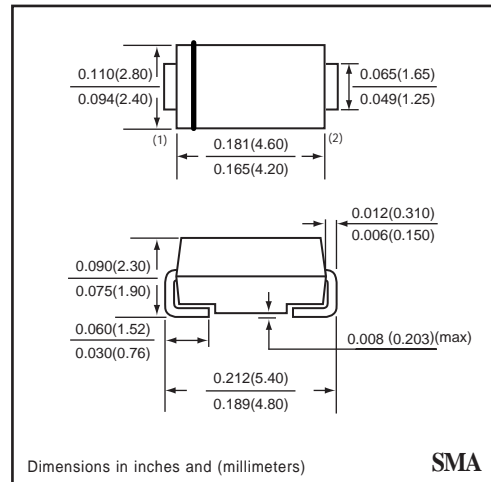

Dimensions in inches and (millimeters)

SMA

MAXIMUM RATINGS (At TA = 25°C unless otherwise noted)

RATINGS	SYMBOL	HSM21PT	HSM22PT	HSM23PT	HSM24PT	HSM25PT	HSM26PT	HSM27PT	HSM28PT	UNITS
Maximum Recurrent Peak Reverse Voltage	VRRM	50	100	200	300	400	600	800	1000	Volts
Maximum RMS Voltage	VRMS	35	70	140	210	280	420	560	700	Volts
Maximum DC Blocking Voltage	Vdc	50	100	200	300	400	600	800	1000	Volts
Maximum Average Forward Rectified Current TL = 100°C	Io	2.0								Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	IFSM	60								Amps
Typical Junction Capacitance (Note 1)	CJ	30				20				pF
Operating and Storage Temperature Range	TJ, TSTG	-65 to +150								°C


ELECTRICAL CHARACTERISTICS (At TA = 25°C unless otherwise noted)

CHARACTERISTICS	SYMBOL	HSM21PT	HSM22PT	HSM23PT	HSM24PT	HSM25PT	HSM26PT	HSM27PT	HSM28PT	UNITS
Maximum Instantaneous Forward Voltage at 2.0 A DC	VF	1.0		1.3		1.5		1.7		Volts
Maximum DC Reverse Current at Rated DC Blocking Voltage at TA = 25°C	IR	5.0								uAmps
Maximum Full Load Reverse Current Average, Full Cycle at TA = 55°C		100								uAmps
Maximum Reverse Recovery Time (Note 2)	trr	50				70				nSec

NOTES : 1. Measured at 1.0 MHz and applied reverse voltage of 4.0 volts
 2. Test Conditions : IF = 0.5 A, IR = -1.0 A, IRR = -0.25 A

RATING CHARACTERISTIC CURVES (HSM21PT THRU HSM28PT)

FIG. 1 - TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

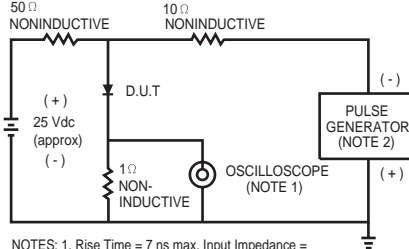

NOTES: 1. Rise Time = 7 ns max. Input Impedance = 1 megohm. 22 pF.
2. Rise Time = 10 ns max. Source Impedance = 50 ohms.




FIG. 2 - TYPICAL FORWARD CURRENT DERATING CURVE




FIG. 3 - TYPICAL REVERSE CHARACTERISTICS

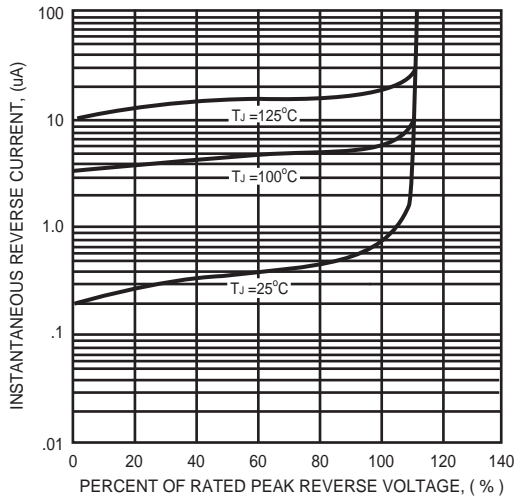


FIG. 4 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

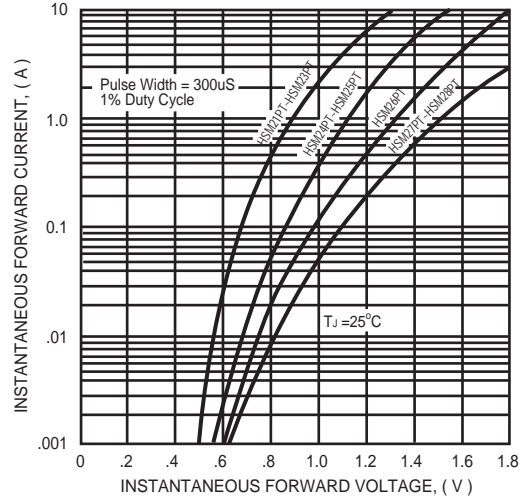


FIG. 5 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

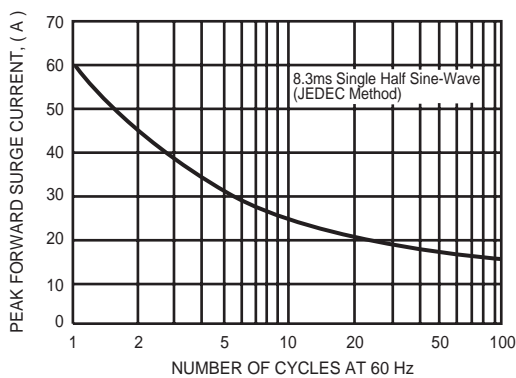


FIG. 6 - TYPICAL JUNCTION CAPACITANCE

