ARJC02-111006E

FEATURES:


- Compliant with IEEE802.3 standard
- 350uH minimum OCL with 8mA bias current
- High performance for maximum EMI suppression
- High reliability 750 mating/unmating cycles


STANDARD SPECIFICATIONS

Operating temperature range: 0°C to +70°C Storage temperature range: -25°C to +85°C Standard Electrical Specifications @25°C


Minimum Parameters Typical Maximum Notes 1CT:1 Тx Turn Ratio (±3%) 1CT:1CT Rx Inductance 350 uН 100kHz/0.1V@8mA 1-100MHz Insertion Loss -1.0 dB 1-10MHz -18 -16 10-30MHz Return Loss -14 dB 30-60MHz -12 60-80MHz -10 80-100MHz 1-100MHz CMR -35 dB Crosstalk -35 dB 1-100MHz Hipot 1500Vrms/1mA/1s


MECHANICAL DIMENSIONS

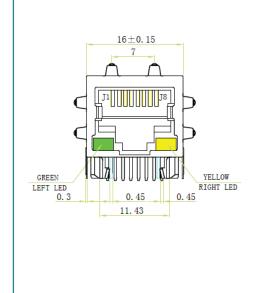



Recommended Land Pattern

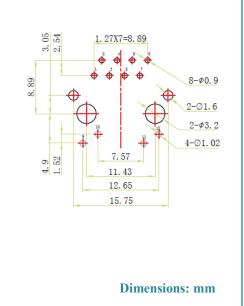

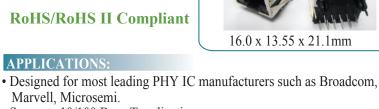

• Supports 10/100 Base-Tapplications

APPLICATIONS:

Marvell, Microsemi.

• Provides signal conditioning, EMI suppression and signal isolation.

Revised: 12.26.13 Visit www.abracon.com for Terms & Conditions of Sale 30332 Esperanza, Rancho Santa Margarita, California 92688 tel 949-546-8000 | fax 949-546-8001 | www.abracon.com





10/100 Base-Tx Tap Down RJ45 with LED


ARJC02-111006E




RoHS/RoHS II Compliant

SCHEMATICS



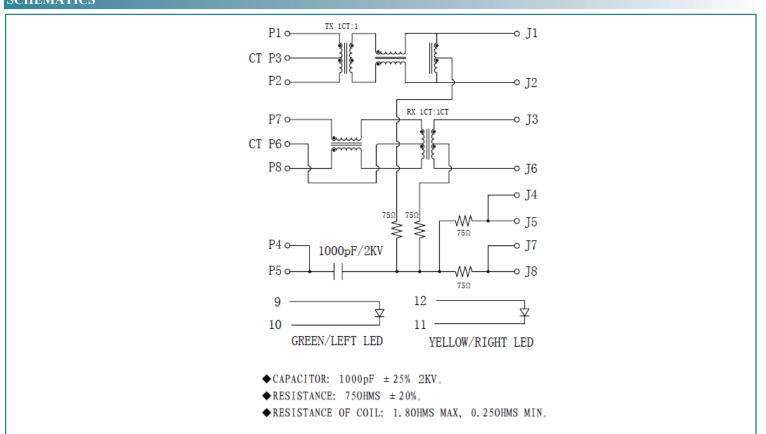

PACKING:

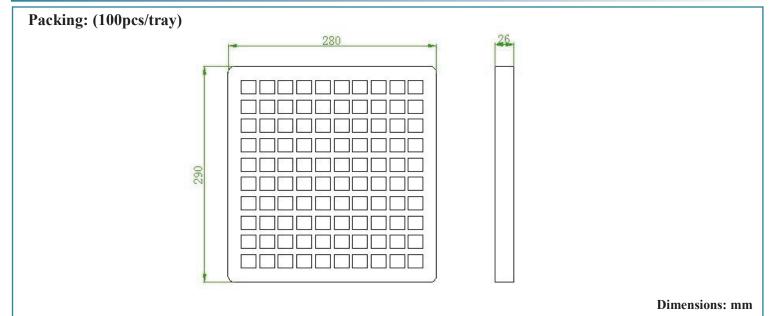

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.

ABRACON IS ISO 9001:2008 CERTIFIED



Visit www.abracon.com for Terms & Conditions of Sale Revised: 12.26.13 30332 Esperanza, Rancho Santa Margarita, California 92688 tel 949-546-8000 | fax 949-546-8001 | www.abracon.com