

70-379-1 Socket/5 Amp Rating, 120 Volts





| BOLD-FACED PART NUMBERS ARE NORMALLY STOCKED | |
|--|-----------------------------------|
| Standard Part Number | Description |
| 70-379-1 | 14-Pin, Printed Circuit Terminals |

General Specifications (UL 508)

| Characteristics | Units | Value |
|-------------------------------------|-------|---------------------------|
| Number of Terminals | | 14 |
| Electrical Rating | | |
| Nominal Voltage Rating | Volts | 120 |
| Nominal Current Rating | Amps | 5 |
| Dielectric Strength | | |
| Output to Input Terminals | V rms | 1500 |
| Output to Adjacent Output Terminals | V rms | 1500 |
| Temperature | | |
| Operating Range: | °C | - 40 to + 80 |
| Storage Range: | °C | - 40 to + 105 |
| Construction | | |
| Internal Metal Tracks | | Copper Alloy, Zinc Plated |
| Terminals | | Copper Alloy, Zinc Plated |
| Miscellaneous | | |
| Socket Mounting: | | Printed Circuit |
| Connection Method | | Solder |
| Flamability Rating | Class | 94V-0 |
| Body Color | | Light Gray |
| Product Certification | | UL, CSA |
| Conformance | | CE, RoHS |
| Weight | grams | 5.8 |

Optional Mating Accessories




782 Relays

16-1342

TDR782 Relay

16-TDR782SC

| Standard Part Number | Description | Catalog Location |
|----------------------|--|--------------------------|
| 782XDX1, 2, 3 & 782H | Relay | Section 1 p.18-19, 42-43 |
| 16-1342 | Metal Hold-Down Clip, Side Mount for 782 | Section 3 p.8-11 |
| 16-TDR782SC | Metal Hold-Down Clip for TDR782 | Section 3 p.8-11 |

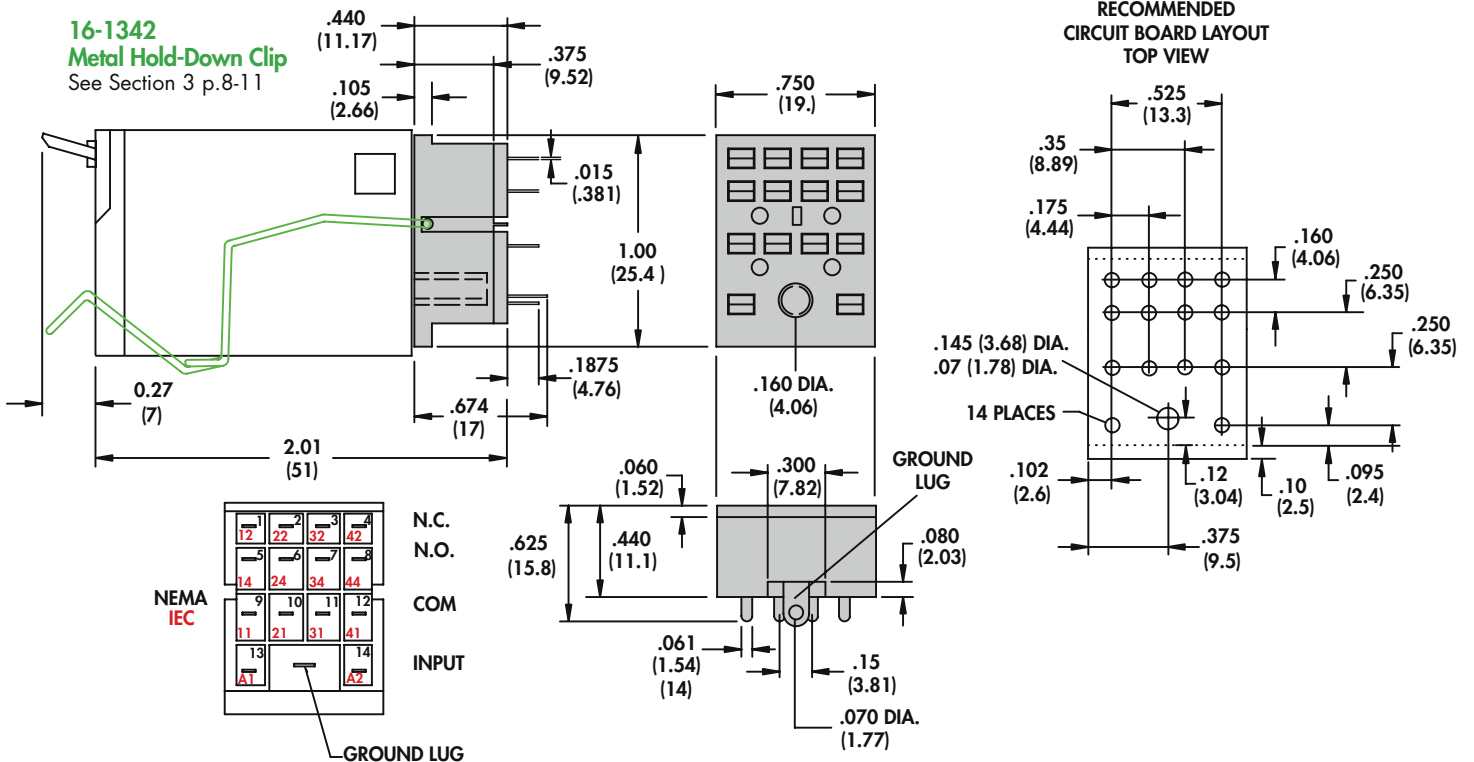

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Schneider Electric:](#)

[70-379-1](#)