PART NUMBER	PLATING	RECOMMENDED WIRE SIZE	DIM "A" HEIGHT	DIM "B" WIDTH	RECOMMENDED CRIMP APPLICATOR	PACKAGE SIZE
44262-4634	30µ " GOLD STRIPE OVER 50µ " NICKEL OVERALL WITH 80-130µ " SELECT TIN	8 AWG (2) 12 AWG	7.42±0.5	5.84±0.5	63832-6300	1800 PARTS/ REEL
44262-4632		10-12 AWG (2) 14 AWG	5.97±0.5	5.33±0.5	63832-6000	2500 PARTS/ REEL
44262-4636		14-16 AWG (2) 16 AWG (2) 18 AWG	5.20±0.5	5.33±0.5	63832-6100	

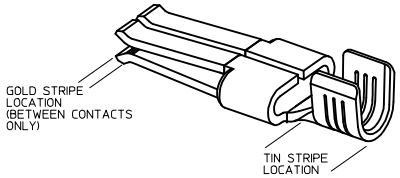

NOTES:

1. MATERIAL: COPPER ALLOY .032 IN THICK
2. FINISH: PER MOLEX PLATING SPECIFICATION ES-88 - SEE CHART
3. FOR CRIMP APPLICATOR SEE CHART
4. FOR CRIMP TOOLING CONTACT MOLEX OR VISIT THE MOLEX WEBSITE AT: WWW.MOLEX.COM
5. STANDARD PACKAGE SIZE: SEE CHART
6. SEE PRODUCT SPECIFICATION: PS-44262-001 FOR MORE INFORMATION
7. PARTS ARE RoHS COMPLIANT
8. FOR MATING CONTACT: SEE CHART
9. FOR CRIMP SET UP INFORMATION SEE MOLEX APPLICATION SPECIFICATION DOCUMENT:

   8 AWG - ATS-638326300
   10/12 AWG - ATS-638326000
   14/16 AWG - ATS-638326100

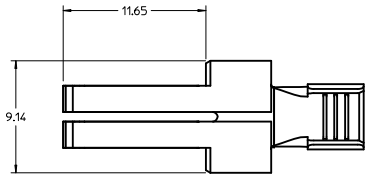



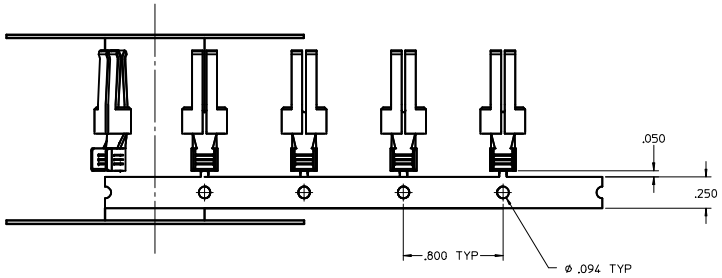

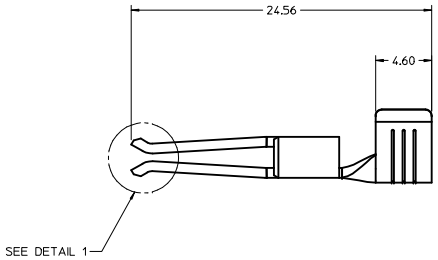

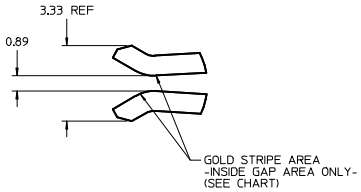

DETAIL 1
SCALE 10:1

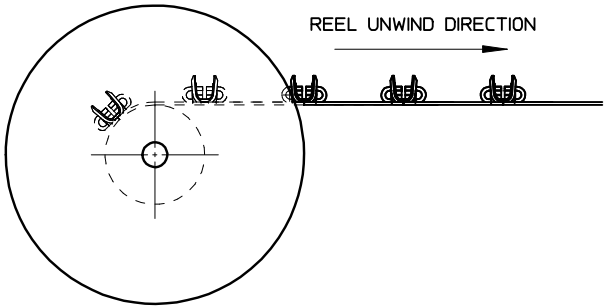

RELEASED EC NO: UCP2015-4855 DRWN:JQUILES 2015/05/19 CHKD:BPISZCZOR 2015/05/21 APPR:APATEL 2015/06/11	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED) mm / INCH	DIMENSION STYLE MM ONLY	SCALE 5:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
A	REV	▽=0	4 PLACES ± --- / ± ---	DRAWN BY JQUILES DATE 2015/05/19	TITLE TERMINAL - RECEPTACLE POWER CONTACT TEN60 POWER FAMILY		
		▽=0	3 PLACES ± --- / ± ---	CHECKED BY BPISZCZOR DATE 2015/05/21			
		▽=0	2 PLACES ± 0.13 / ± ---	APPROVED BY APATEL DATE 2015/06/11	molex		
		▽=0	1 PLACE ± 0.25 / ± ---	MATERIAL NO. SEE CHART	DOCUMENT NO. SD-44262-2000	SHEET NO. 1 OF 1	
			0 PLACE ± --- / ± ---				
			ANGULAR ±1/2°	SIZE D	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				

tb_frame_D_P_AM_T
Rev. G 2012/01/11