


Number of contacts


96, 64

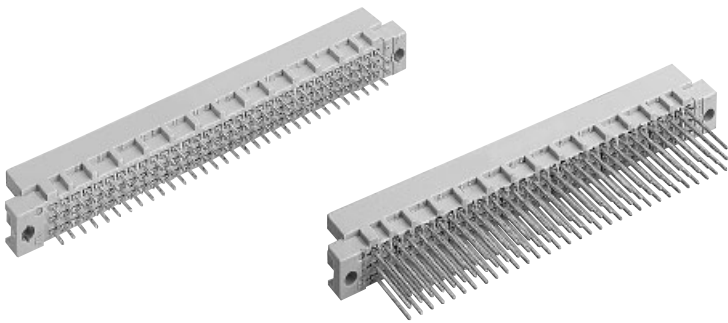


Male connectors

Identification	Number of contacts	Contact arrangement	Part No.	Performance levels according to IEC 60603-2. Explanation chapter 00		
				3	2	1
Male connector with solder pins 2.5 mm	96		Performance level 3 on request	09 79 196 6902	09 79 196 6902	
Male connector with solder pins 4.0 mm	96					
	64					
Male connector with wrap posts ¹⁾ 13 mm	96		Performance level 3 on request	09 79 196 6903 09 79 396 6903 ^{b)} 09 79 164 6903 09 79 364 6903 ^{b)}	Performance level 1 on request	
	64					
	96					



Dimensions

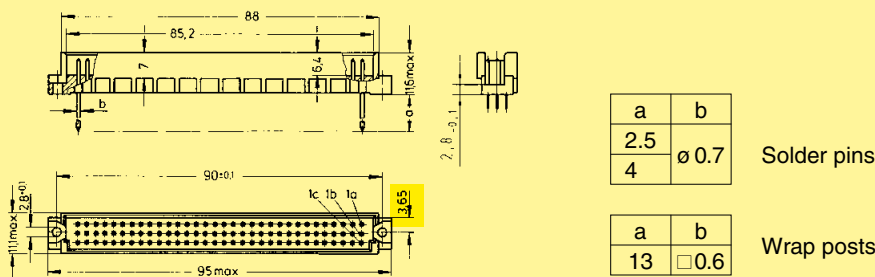

Panel cut out

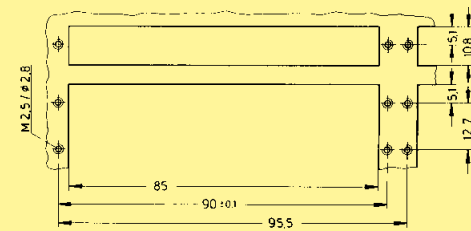

Board drillings
Mounting side

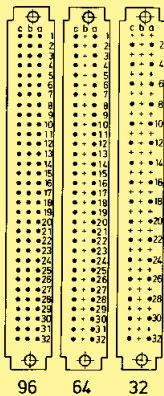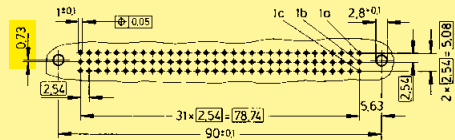

Contact arrangement
View from termination side

Dimensions in mm

Other contact arrangements on request

■ = deviating dimensions from standard male connectors (see page 01.46f)

^{b)} Connectors with snap-in clips see chapter 00

¹⁾ To be used only for wire wrap termination