


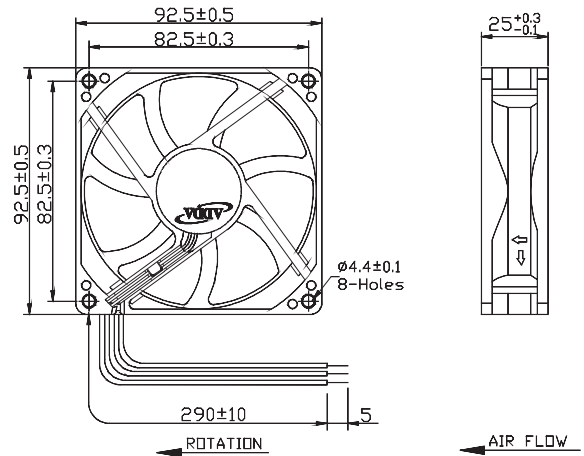

Specifications(Nominal)

Bearing type: ◎=Ball ※=Sleeve○=1B1S●=Hypro bearing												
Frame size (mm)	Model No.	Bearing System Type	Rated Voltage (VDC)	Current (A)	Power (W)	Rated Speed (rpm)	Maximum AirFlow (CMM)	Maximum AirFlow (CFM)	Maximum Pressure (InAq)	Maximum Pressure (mmAq)	*Noise Level (dB/A)	Weight (g)
92x92x25	AD0912DB-A73GL(N)	◎ ※ ●	12	0.05	0.60	1600	0.858	30.303	0.034	0.877	19.1	92.0
	AD0912LB-A73GL(N)	◎ ※ ●	12	0.09	1.08	2300	1.245	43.993	0.093	2.370	30.0	
	AD0912MB-A73GL(N)	◎ ※ ●	12	0.14	1.68	2600	1.396	49.357	0.124	3.149	34.5	
	AD0912HB-A73GL(N)	◎ ※ ●	12	0.18	2.16	2900	1.587	56.069	0.146	3.721	37.5	
	AD0912UB-A73GL(N)	◎ ※ ●	12	0.27	3.24	3300	1.752	61.929	0.187	4.749	42.2	
	AD0924LB-A73GL(N)	◎ ※ ●	24	0.08	1.92	2300	1.245	43.993	0.093	2.370	30.0	
	AD0924MB-A73GL(N)	◎ ※ ●	24	0.09	2.16	2600	1.396	49.357	0.124	3.149	34.5	
	AD0924HB-A73GL(N)	◎ ※ ●	24	0.11	2.64	2900	1.587	56.069	0.146	3.721	37.5	
	AD0924UB-A73GL(N)	◎ ※ ●	24	0.16	3.84	3300	1.752	61.929	0.187	4.749	42.2	
	AD0948HB-A73GL	◎	48	0.11	5.28	2900	1.587	56.069	0.146	3.721	37.5	

Fan Performance Curve

FLOWRATE(CMM)

Static Pressure (mmAq)

Static Pressure (inAq)

FLOWRATE(CFM)

Legend:

- M (Blue diamonds)
- D (Green crosses)
- U (Teal pluses)
- L (Pink squares)
- H (Red circles)

Flowrate (CFM)	Flowrate (CMM)	Model M (mmAq)	Model D (mmAq)	Model U (mmAq)	Model L (mmAq)	Model H (mmAq)
0	0.000	3.6	1.0	4.8	2.4	3.8
14	0.396	2.4	0.6	3.8	1.6	2.8
28	0.792	1.6	0.2	2.8	1.0	2.0
42	1.188	1.0	0.0	2.0	0.4	1.4
56	1.584	0.0	0.0	1.0	0.0	0.6

0	1	2	3	4	6	7	8	9	A	B
	✓	✓	✓							

				
✓	✓		✓	✓